

Assessment of Carbon Emission Reduction for Buildings Projects in Malaysia-A Comparative Analysis

Mustafa M. A. Klufallah¹, Muhd Fadhil Nuruddin², Mohd Faris Khamidi³, Nazhatulzalkis Jamaludin⁴

^{1,2}Department of Civil Engineering, Universiti Teknologi PETRONAS, 31750 Tronoh, Perak, Malaysia

³School of the Built Environment, Heriot-Watt University Malaysia, 62100 Putrajaya, Malaysia

⁴Department of Civil Engineering, Universiti Teknologi PETRONAS, 31750 Tronoh, Perak, Malaysia

Abstract. The Malaysian construction industry significantly contributes as an empowerment to its development vision of 2020 by reducing 40% of carbon emission. Moreover, this industry accounts as a threat to the environment, not only in terms of consumption of natural resources but also in emitting million tons of carbon emission annually. In fact, Malaysia is categorized the 30th in the world's ranking in carbon emission level. To mitigate the raise of carbon emission level from the buildings construction, several studies identified some of the effective carbon emission assessment tools for construction projects but it is lack of implementation in Malaysia. The green building index (GBI), Malaysian CIB Report has been introduced to assist the construction stakeholders in reducing the level of carbon emission and the impact of buildings on the environment. This paper presents an analysis of carbon emission from housing projects and office buildings in order to identify and quantify the main sources of carbon emission for each project and it proposes environmental friendly materials as replacement for conventional construction materials to achieve the implementation of sustainability in Malaysia.

1 Introduction

Global warming is increasingly permeating the fabrics of national discourse across many countries globally. The media, government and businesses are not left out in the quest to go green. Increasing amount of carbon emission in the world, if left unchecked, will lead to higher rates of water evaporation and higher earth's surface temperature. Despite current efforts on the part of Malaysian government to curb emissions, Malaysia is ranks 30th in the world for countries that have the largest amount of carbon emission. In terms of sectoral percentage, 24% of total carbon dioxide comes from the construction sector in the country [1]. In fact, more than one third of total energy use and greenhouse gases (GHGs) emissions come from Buildings construction both in developed and developing countries.

Environmental issues are not only linked to technological or economic activities but also associated with cultural and behavioral aspects as well. In terms of economic and technological activities, which are the direct cause of environmentally destructive behavior, individual beliefs and societal norms guide the development of these activities [2-3]. Therefore, the major objective of this

article is to identify and determine the carbon emission of construction materials from selected case studies that contribute to the high emission of carbon within the Malaysian environment in order to identify the relationship between construction materials and its carbon emission.

1.1 Energy Demand in Malaysia

According to the Ninth Malaysia Plan, the overall national energy demand is expected to increase at an average rate of 6.3% annually from 2006 to 2010. The industrial and transport sectors were reported as the major energy consumers constituting of 41.1% and 38.8% of the total energy demand in 2010. Residential and commercial buildings accounted for 13% of total energy consumption and 48% of electricity consumption [4].

According to the Intergovernmental Panel on Climate Change (IPCC) fourth assessment's report, there are an abroad number of cost-effective technologies that have not yet been widely adopted, which can help in reducing the amount of GHGs emissions to a significant extent. These technologies include: highly efficient ventilation and cooling systems, high efficiency lighting and electrical appliances, passive solar design, insulation materials, solar water heaters, high-reflectivity building materials and multiple glazing. Rather than seek optimal building efficiency through the technologies available to reduce building energy demands, there has been an interest in developing renewable energy technologies that could meet the increasing demand of energy [5].

However, efforts are gearing up towards reducing energy use in building through the use of newer technologies and materials. Buildings having energy use savings up to 75% or higher through designs and operation stages of buildings as complete systems are being designed and built. Therefore, it is believed that there is a greater potential for better energy efficient building through construction of new building than retrofitting older ones.

1.2 Building Construction and GHGs Emission

The increased concentration of GHGs emission will lead to rise of global warming and drives what is called, climate change. Among GHGs emissions, carbon dioxide (CO₂) is the most important anthropogenic GHGs, and the global increases in CO₂ concentration are due burning of fossil fuel and extensive uses of land [6].

According to Chan [7], the construction activities are considered the major contributor to environmental pollution, and the impact of construction industry produces undesirable remnants [8]. This includes the depletion of non-renewable resources, destruction of landscapes and creation of health and safety problems, both relating directly and indirectly to the people involved in this industry. In addition, the construction industry consumes large quantity of environmental resources and it is one of the largest polluters of the environment [9]. Currently, the world is facing the challenge of global warming and climate change issues. The CO₂ is the most important by-product in the manufacture of building materials [10]. Furthermore, there are four sources of GHGs emission in construction of buildings, which are; the manufacture and transportation of building materials, energy consumption of construction equipment, energy consumption of processing resources and disposal of construction's waste [11].

1.3 The Malaysian Constructions and GHGs

In the worldwide, the building construction yearly consumes three billion tons of raw materials and produces 10% to 40% of solid waste stream in all countries [12]. In the United States, 70% of electricity consumption of buildings, 39% of energy use, 30% of waste output and 12% of all potable water consumption [13]. On the other hand, statistics show that in Malaysia, the buildings account for about 20% of the production of GHGs that comes in third after transportation 27% and industries 21%

[14]. The materials used in buildings, which consist mainly of fossil fuels. In addition, 24% from the total CO₂ comes from the construction industry in the country [15]. Furthermore, buildings are responsible for more than one third of total energy uses and associated GHGs emissions in society, both in developed and developing countries.

1.4 Green Buildings

Green Buildings are designed to reduce the negative effects of real estate development on the environment, human health and also aims at promoting sustainability of life. A carefully planned green building life-cycle during construction and operation of green building can “*assure the healthiest possible environment while representing the most efficient and least disruptive use of land, water, energy and resources*” [16].

The ideas behind the growing concern for green buildings is a response to the growing problems of pollution and environmental issues, increasing environmental awareness, acceptance of climate change, increasing energy cost, decreasing the consumption of natural resources and increasing demand for sustainability in building design and construction. Although buildings create serious problems for our environment, they can also serve as an essential path to the solution. Several studies have reported that buildings account for about 38% - 50% of the GHGs emissions. They also found that one-third of the world's total energy is being consumed in the built environment while confirming that enhancement of demand and supply of green building could contribute up to 35% reduction of carbon emission. They argued further that adopting reflection techniques can achieve 30 - 50% reduction in total energy use; while green compliance could lead to 70% savings on waste output; and reduction of 40% of water usage [17-18].

Green buildings have been poised for early adoption in Malaysia due to recognition of the potential economic and environmental benefits. Published and available reports highlighted that there will be increasing demand for green buildings in relation to the growth among companies about environmental awareness and increase in corporate social responsibility as well as growing body of evidence demonstrating that green buildings make financial sense [19].

1.5 Assessing Sustainability in Malaysia

The Malaysian government has introduced some of energy efficiency measures in order to achieve sustainability goals like, the five-year development plans, which outline the government policies toward vision 2020, guidelines for buildings in improving their energy efficiency, road systems' improvement, the construction of both light rail and electrical systems. Even more strategies were adopted such as environmental regulations, planning and land uses in order to increase the intention of public awareness toward protection of the environment.

To construct a green buildings that can provide energy and water savings, a healthier indoor environment, better connectivity to public transport and the adoption of recycling and greenery in their projects is intended to promote sustainability in the built environment and raise awareness among developers, architects, engineers, planners, designers, contractors and the public about environmental issues [20].

2 Research Methodology

In this paper, the amount of carbon emission for each project has been extracted from Bill of Quantities (BQ) in the contract document. The conversions to tonnes are the density value, where it can relate the volume and weight for each material. The method used for the carbon equivalent is the boundary of cradle-to-gate method as the boundary condition are specified compared to cradle to grave. Then, the average of carbon emission for selected projects have been identified and compared accordingly. Figure 1 below explains the research methodology.

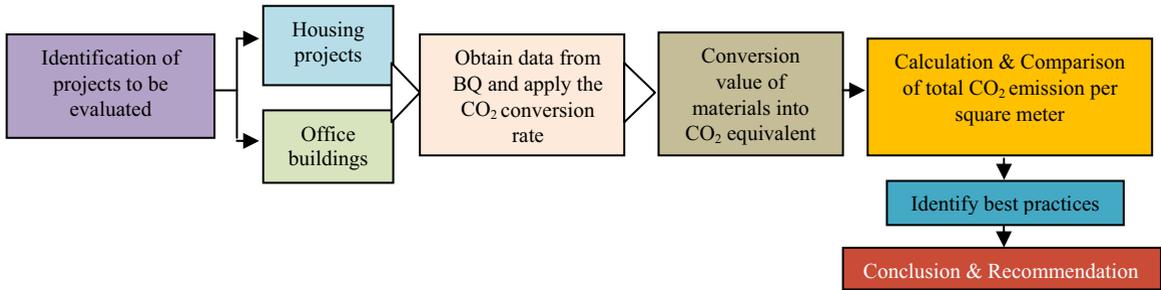


Fig. 1: The flowchart of research methodology

3 Results and Discussions

3.1 Carbon emission from housing projects

The quantification of carbon footprint is done by evaluating the selected Putrajaya Holdings' projects in Malaysia. The data is obtained from the BQ of the projects. In general, there are 26 units of intermediate double story houses (more environmental friendly) and 20 units of corner double storey house to be compared. In Table 1, the carbon emission of 26 unit intermediate double storey house has been classified into four major selected construction materials.

Table 1: Conversion of the material to CO₂ equivalent for 26 units of intermediate double storey house (Project 1)

Material	Amount from BQ	Unit	Tonne conversion (tonnes / m ³)	Tonnes of Material	Tonnes CO ₂ /tonnes material	CO ₂ Emission (tonnes)
Concrete	2271.49	M ³	2.2000	4997.28	0.2000	999.46
Steel	141.62	Kg	8.0000	1132.99	1.8100	2050.71
Mortar	26.47	M ²	2.2000	58.24	0.2100	12.23
Brick	1080514	M ²	0.0024	2593.2	0.2000	518.65
TOTAL						3581.05

Table 2, classifies the carbon emission of 20 units corner double storey houses of each material that contributes to the CO₂ equivalent to the project. The result shows that the Steel here still is the highest contributor followed by concrete.

Table 2: Conversion of the material to CO₂ equivalent for 20 units of corner double storey house (Project 2)

Material	Amount from BQ	Unit	Tonne conversion (tonnes / m ³)	Tonnes of Material	Tonnes CO ₂ /tonnes material	CO ₂ Emission (tonnes)
Concrete	1918.20	M ³	2.2000	4220.04	0.2000	844.01
Steel	117.95	Kg	8.0000	943.56	1.8100	1707.85
Mortar	12.97	M ²	2.2000	28.52	0.2100	5.99
Bricks	704205	M ²	0.0024	1690.09	0.2000	338.02
TOTAL						2895.86

The result shows that the steel provides the highest amount of CO₂ equivalent value, followed by concrete and bricks. It can be seen that in Figure 2, the two projects have a similar trend in which the concrete and steel has the highest contribution of carbon emission compared to all other materials.

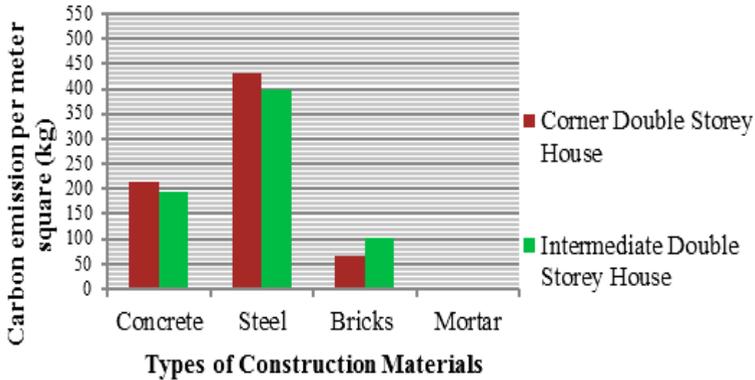


Fig. 2: Carbon emission from materials of housing projects

The amount varies of selected materials are dependant to the material usage. Therefore, the carbon dioxide equivalent value must be represented as accurately as possible. Table 3 presents the total carbon emission equivalent of each project per meter square.

Table 3: The (kg CO₂) equivalent per square meter of selected housing projects

Project	CO ₂ emission (CO _{2e}) (kg)	Gross floor area (GFA) (m ²)	CO _{2e} per sqm. (kgCO ₂ /m ²)
H. Project 1	3581040	5130.3	698.01
H. Project 2	2895862	3946.4	733.7

Figure 3 shows the carbon emissions equivalent per square meter for sustainable (H. Project 1) and conventional housing (H. Project 2) projects. The values obtain for sustainable project is 698.01 kg CO₂/m², whereas conventional project gives values of 733.7 kg CO₂/m², with the average of 715.8 kg CO₂/m². In terms of reduction percentage by comparing both sustainable and conventional housing projects, it is found that the sustainable housing project has a lower carbon footprint than conventional project by 4.8%.

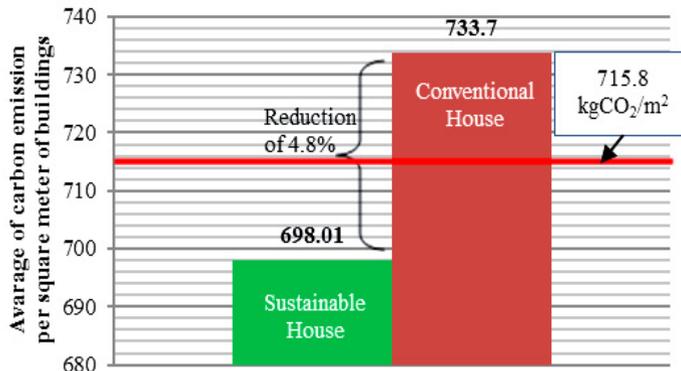


Fig. 3: The average carbon emission per square meter of housing projects

3.2 Carbon emission from office buildings

Table 4 classifies the office buildings into sustainable and conventional by evaluating the selected Putrajaya Holdings’ projects. As shown in Figure 4, the usage of structural material for overall building area is much lower for sustainable buildings than the conventional buildings. It is

found that the sustainable buildings have a lower carbon footprint than conventional buildings by 16.17%. With the average of 333.98 kg CO₂/m² as shown in Figure 5. Technically, sustainable buildings emit less carbon footprint than conventional buildings due to the efficiency in using building materials in construction activities for these green building projects.

Table 4: The kg CO₂ equivalent per square meter of selected office building projects

Project	CO ₂ emission (CO ₂ e) (kg)	GFA (m ²)	CO ₂ e per sqm. (kgCO ₂ /m ²)
Lot 2C2- Green	20230195.753	53486	378.233
Lot 4C11- Green	29359701.612	77600	378.347
Lot 348-Green	21,481,540.82	136636	157.216
Plot Z1-Conventional	7287743.372	16362	445.396
Loc 3C-Conventional	12248705.43	29473	415.590
411-G- Conventional	19,872,828.68	86758	229.1

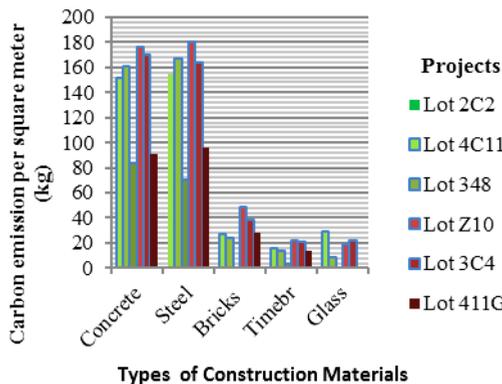


Fig. 4: Comparison of carbon emission of building materials (kg) per m² and the average CO₂/m²

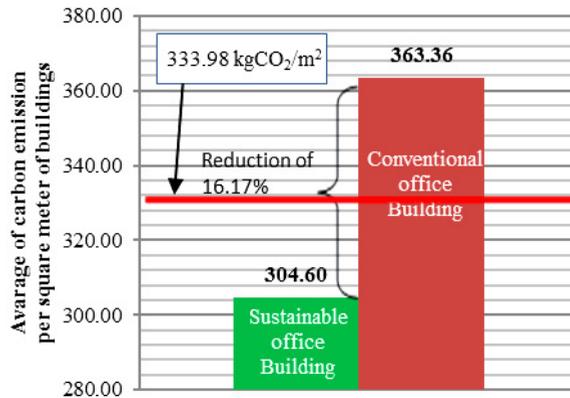


Fig. 5: Total average of carbon emission per m² of each building

4 Conclusion and Recommendations

From the research done of the Stockholm Environment Institute (SEI), the average of GHGs emission by material type of an On-Site Construction House is approximately 660 kg CO₂/m² of GHG emission per square meter. In comparison to the case study in this paper, the carbon emission is 715 kg CO₂/m². Thus, the housing project’s carbon emission is relatively high. The value obtained for office buildings is less compared to that of conventional building by 16.17% reduction in comparison.

These values differ because the construction of sustainable buildings used materials more efficiently than conventional buildings. It can be concluded that for further buildings construction's practice in terms of building materials and the amount of carbon emission is recommended to be below the red line (715 kg CO₂/m²) for housing projects and (333.98 Kg CO₂/m²) for office buildings and any values obtained above the red line is considered as not being able to adapt the good practice.

Choosing environmental-friendly materials would absolutely help in minimizing the depletion of natural resources including raw materials such as gravel and sand as well as energy and water used annually in the manufacturing & construction process. This practice can be applied in choosing "green" structural materials. For example, in constructing sustainable building, instead of using ordinary cement, one can use 'green cement' in which is a combination of cement kiln dust (CKD) and class F Fly Ash. In addition, it is possible to reduce amount of steel and concrete to construct the building. This can actually be achieved by using lightweight materials such as light weight concrete so that the loading carried by the structural elements such as main beams and columns can be reduced significantly.

References

1. Nation Master Statistic, 2013. CO₂ Emission by Country. Available at: <http://www.nationmaster.com> October, 19, [NOV, 2013].
2. Barley, S., 1986. Technology as an occasion for structuring: Evidence from observations of CT scanners and the social order of radiology departments. *Administrative Science Quarterly* **31**: 78-108.
3. David, P., 1985. Clio and the economics of QWERTY. *Economic History* **75**: 227-332.
4. EIB, 2008. Energy Information Bureau (EIB) Malaysia.
5. Hani, S.A., S. Kamaruzzaman, A. Mohamed, M.A.H. Ahmed and N.A. Ahmed, 2009. Experimental Study of Using Renewable Energy in Yemen. *Australian Journal of Basic and Applied Sciences*, **3**(4): 4170-74.
6. Paternmann, C., 1999. The fifth EU framework programme and its consequences for the construction industry. *Journal of Building Research & Information*, **27**(6), 412-418.
7. Chan, A., 2004. Key performance indicators for measuring construction success: Benchmarking, *An International Journal*, **11**(2), 203-221, 2004.
8. Augenbroe, G., Pearce, A. R., 1998. Sustainable Construction in the United States of America A perspective to the year 2010.
9. Ding, G. K., 2008. Sustainable construction-the role of environmental assessment tools. *Journal of Environmental Management*, **86**(3), 451-464.
10. Buchanan, A. H., & Honey, B. G. (1994). Energy and carbon dioxide implications of building construction. *Journal of Energy and Buildings*, **20**, 205-217.
11. Yan H., Shen Q., Fan H., Wang Y., Zhang L., 2010. Green Gas Emission in Building Construction: A case study of one Peking in Hong Kong. *Journal of Building and Environment*, **45**, 1-7.
12. United Nations, 2007. Malaysia Initial National Communication: United Nations Framework Convention on Climate Change. Kuala Lumpur: Ministry of Science, Technology and the Environment.
13. IPCC, 2007. Climate Change: The Physical Science Basis, Geneva: Intergovernmental Panel on Climate Change.
14. Kibert C., 2002. Policy Instruments for Sustainable Built Environment. *Journal of Land Use and Environmental Law*, **17**(2), 379-394.

15. Samad M. H., A. M. A. Rahman M. A., Ibrahim F., 2008. Green Performance Ratings for Malaysian Buildings with Particular Reference to Hotels. In Proc. of International Conf. on Environmental Research and Technology, Penang, Malaysia, 313-317.
16. Zeigler, P.M., 2012. What is a Green Building? And Fundamental Principles of Green Building and Sustainable Site Design. Governor's Green Government Council (GGGC) Pennsylvania.
17. US Green Building Council (USGBC) Washington (2003) Building Momentum: National Trends and Prospects for High-Performance Green Buildings.
18. GBI, 2010. GBI Assessment Criteria for NRNC. Green Building Index Sdn. Bhd: April 2012.
19. Godwin U., Maizon H., Afeez O., Kherun N., 2013. Review of Green Building Demand Factors for Malaysia. Journal of Energy Technologies and Policy. 3(11).
20. Chandranayagam D. 2013. Malaysia's Green Building Index for Tropical Structures.