

Experience of solar-diesel power plant introduction in the village of Nerkha of the Irkutsk region

*Irina Ivanova**, and *Timofei Pasechnikov*, Melentiev Energy Systems Institute of Siberian Branch of the Russian Academy of Sciences, Irkutsk, Russia

Abstract. The paper presents a brief characteristic of the state of power supply to the consumers of the village of Nerkha in the Nizhneudinsk Area of the Irkutsk Region before the construction of a solar power plant. The main principles of the feasibility study on construction of a solar-diesel power plant are described. The schedules of the calculated power generation by the photovoltaic modules on the basis of the data of the local meteorological station are compared with the actual consumption schedule. The connection diagram of the solar-diesel power plant components is shown and its operating principle is briefly described. The actual data of power generation by the diesel power plant and photovoltaic modules for five months of operation are presented. The calculated and actual indices are compared. **Keywords:** Diesel power plant, photovoltaic modules, battery inverters, network inverters, power consumption, calculated generation

1 Introduction

At present the zone of decentralized power supply in the Irkutsk Region includes about 67 settlements numbering above 10 thousand people. The total capacity of diesel power plants (DPPs) supplying power to the consumers of this zone is more than 21 MW, the average fuel component in power production cost is estimated at 20 RUB/kWh. The main problems in power supply in this zone are the difficult conditions of fuel delivery and the state of energy equipment. Many diesel generators were worn-out and obsolete. The ever-occurred numerous failures of equipment lead to interruptions in its operation and additional expenditures. The common problem of the majority of similar isolated settlements is the outdated distribution networks and the noncompliance with the standard wire sections, the losses at the old overloaded transformer substations, etc. The supplied power is not accounted for most frequently.

The villages of Nerkha, Alygdzher, Verkhnyaya Gutara located in the hard-to-reach place of the Nizhneudinsk Area are the isolated settlements of the Irkutsk Region. The population numbers 1168 people or 358 physical power consumers. The capacity of diesel generators used for power supply in the villages ranges from 160 to 300 kW. The inaccessibility of the villages causes serious problems in delivery of fuel, equipment and materials for maintenance operations. In two settlements all cargoes are delivered by winter

* Corresponding author: nord@isem.irk.ru

roads. The fuel cost and transportation charges, as well as the costs on generator maintenance and replacement increase year by year. Meanwhile, the cost of alternative energy sources, particularly solar installations, decreases in the world year by year practically twofold.

2 Description of power supply state in the village of Nerkha

The village of Nerkha was chosen as the primary location for a solar power plant, where the cost of power production at DPP was estimated at 24.5 RUB/kWh, including the costs on operation, depreciation, fuel delivery and maintenance. There were many problems in the power supply to consumers of the village. The 0.4 kV distribution network was in an emergency state, in many parts of the electric network there were so-called “links” – wires with a smaller section. Diesel generators frequently broke down due to the unsatisfactory technical state and operating conditions. There was no fire protection system at all. Due to the problems with the wire section and the natural constant growth of power consumption, the voltage on the network parts that were far from DPP was reduced to 150–180 V, which is unacceptable for high-quality power supply to consumers. DPP was located in the very central part of the village, and a constant noise for 16 hours every day was the usual life situation. The room, in which DPP was located, did not correspond to normal conditions - the building was outdated long ago.

The increased power consumption was caused not only by high network losses due to the non-standard wire section, the lack of transformer substations and electricity meters, but also the uneven distribution of the DPP load. For example, in the summer period the 160 kW DPP was loaded only up to 15–20 kW, which led to a decrease in efficiency and an increase in specific fuel consumption. All of the above factors caused excessive expenditures for fuel and DPP repairs, and worsened the conditions for power supply to consumers.

Table 1 presents the main technical and economic indices of DPP in the village of Nerkha.

Table 1. Technical and economic indices of DPP

Index	Value
Installed capacity of DPP, kW	160
Power generation, thousand kWh/year	398.9
Operating costs, million RUB/year	9.78
Power production cost, RUB/kWh	24.5
Annual fuel consumption, t	150

3 Feasibility study of solar-diesel power plant construction

The feasibility study of the project “Modification of the power supply system in the villages of Nerkha, Alygdzher, Verkhnyaya Gutara in Tofalaria with construction of generating facilities on renewable energy sources” that was carried out by LLC “BaikalRemPutMash” (Slyudyanka town) (LLC “BRPM”) presented and analyzed the options for solving the above problems and improving of the efficiency of power supply to consumers.

Based on the analysis of the archive of wind speed measurements by the local meteorological stations, it was concluded that the construction of wind power plants in the considered villages was ineffective.

By virtue of the seasonal changes in the length of the daytime, it was determined that the maximum possible fuel savings during the year due to photovoltaic modules (PVMs) could be 50%. However, the generator service life will be significantly greater subject to the sufficient marginal capacity of storage batteries. In order to provide the maximum efficiency of the solar power plant, the required capacity of the photovoltaic modules was selected so that the excess power from the solar arrays was minimal. The required calculated capacity of photovoltaic modules is no less than 120 kW and the capacity of storage batteries is 864 kWh. The indices of the main equipment of the solar-diesel power plant are given in Table 2.

Table 2. Unit commitment of the solar-diesel power plant in the village of Nerkha

Index	Value
Capacity of PVM, W	270
Type of module	Mono crystal
Number of PVMs, pcs.	450
Total capacity of PVMs, kW	121,5
Type of storage batteries	OPzV
Number of storage batteries, pcs.	144
Capacity of storage batteries, kWh	864
Capacity of battery inverters, kW	108
Capacity of DPP, kW	160
Inclination angle of PVMs (summer/autumn-spring/winter), degrees	25/45/75

The solar radiation indices of the nearby local meteorological station “Khadama” were applied to estimate the possible power generation by photovoltaic modules, considering the shadows caused by the elevations of the terrain at a particular point of the solar power plant (Fig. 1). Fig. 2 and Table 3 show the share of calculated power generation by the photovoltaic modules in demand throughout the year. In winter, it is 14–31%, in summer it reaches 84–88%.

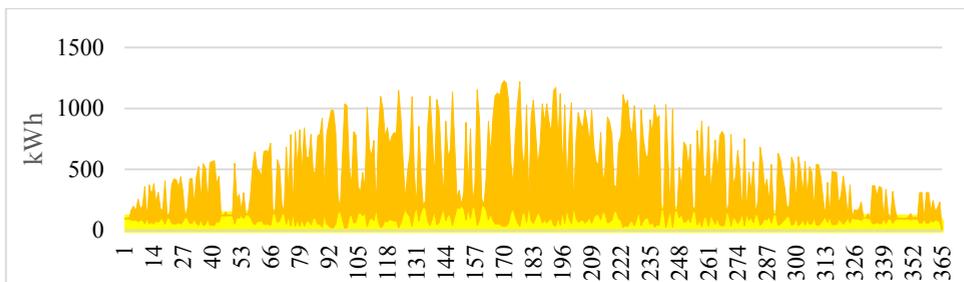


Fig.1. Calculated daily possible power generation by the photovoltaic modules with a capacity of 121.5 kW

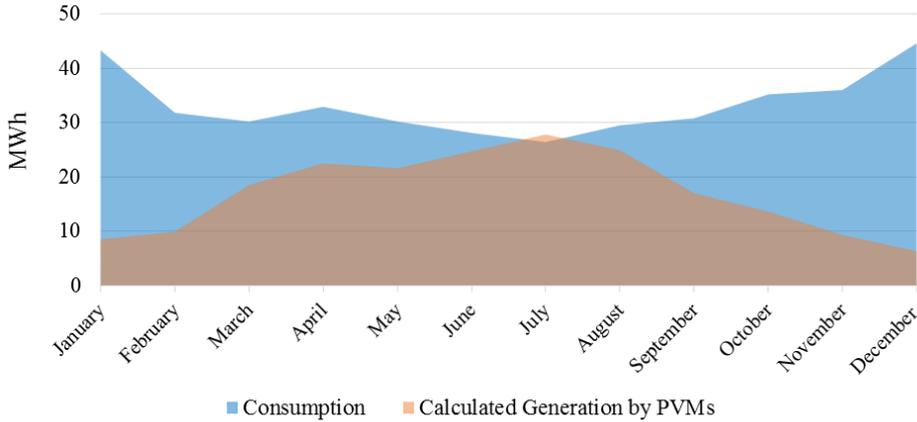


Fig. 2. Comparison of power consumption and calculated generation by photovoltaic modules

Table 3. Share of calculated indices of generation by photovoltaic modules with a capacity of 121.5 kW in power consumption in the village of Nerka

Index	Month of year											
	1	2	3	4	5	6	7	8	9	10	11	12
Generation by PVMs, thousand kWh	8.5	9.9	18.5	22.5	21.6	24.7	27.8	24.9	17.0	13.6	9.3	6.3
Consumption, thousand kWh	43.3	31.8	30.2	32.9	30.2	28.1	26.4	29.5	30.8	35.2	36.0	44.6
Share of PVMs in consumption, %	20	31	61	69	71	88	105	84	55	39	26	14

The connection diagram of all components of the solar-diesel power plant allows combining the capacities of a diesel generator, storage batteries and photovoltaic modules (Fig. 3). When storage batteries and a diesel generator operate jointly, the total rated capacity will be 228 kW. The function of uniform distribution of the generator load allows the rated capacity of 120 kW to be maintained at the generator output due to battery inverters using the excess power for charging. The generator capacity should be reduced, because the generator with such a load can continuously operate for more than 10 hours (for example, in December). The charging capacity of storage batteries varies depending on the consumer load. If it exceeds the generator capacity, the storage batteries cover it by discharging. If charged completely, the storage batteries with a maximum capacity of 108 kW can generate more than 540 kWh for five hours with a 30% discharge.

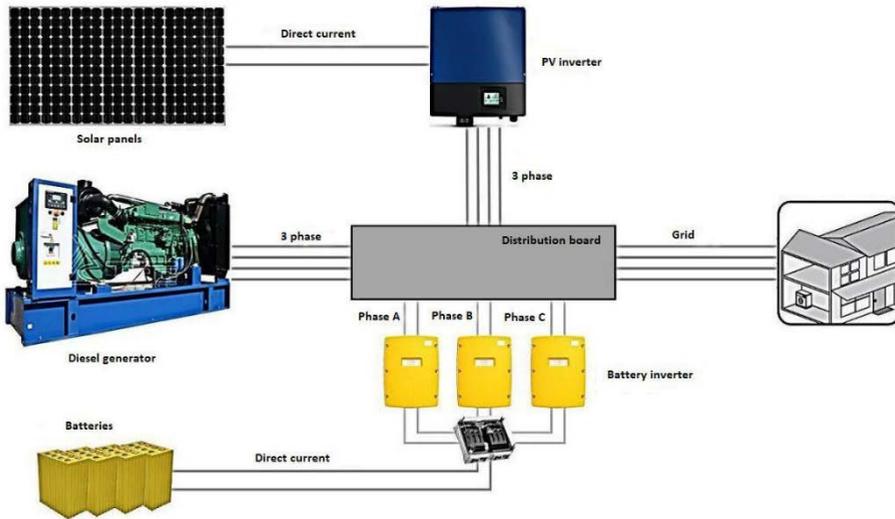


Fig. 3. Connection diagram of the solar-diesel power plant

4 Operating experience of the solar-diesel power plant

The solar power plant was commissioned on December 1, 2017. The load of DPP and PVMs was shifted automatically. The delivery of materials was the main problem of construction. Installation of the solar power plant, connection and commissioning works did not create difficulties. During operation, it turned out that the most important part was to monitor the storage batteries. Due to the equipment complexity, LLC “BRPM” conducts the daily information support via the Internet and the monitoring of the compliance with charge-discharge cycles, temperature of batteries and other indices. In addition to the solar power plant construction and the complete reconstruction of the 10 kV networks, the company installed the smart electricity meters for each consumer. Fig. 4 shows a graph of the actual power generation by DPP and PVMs for the period from December 2017 to April 2018. The solar-diesel power plant performance during the day is available on the Internet at <http://anga3.ru> (Fig. 5).

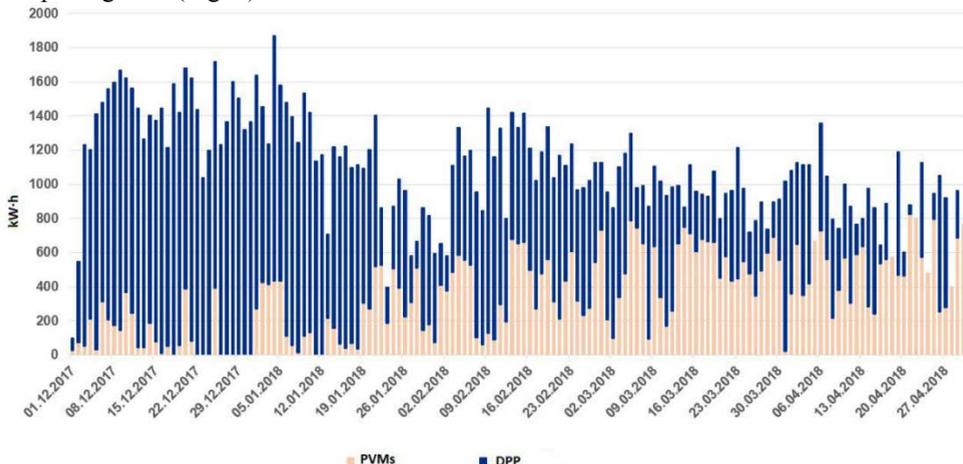


Fig. 4. Daily power generation by the solar-diesel power plant

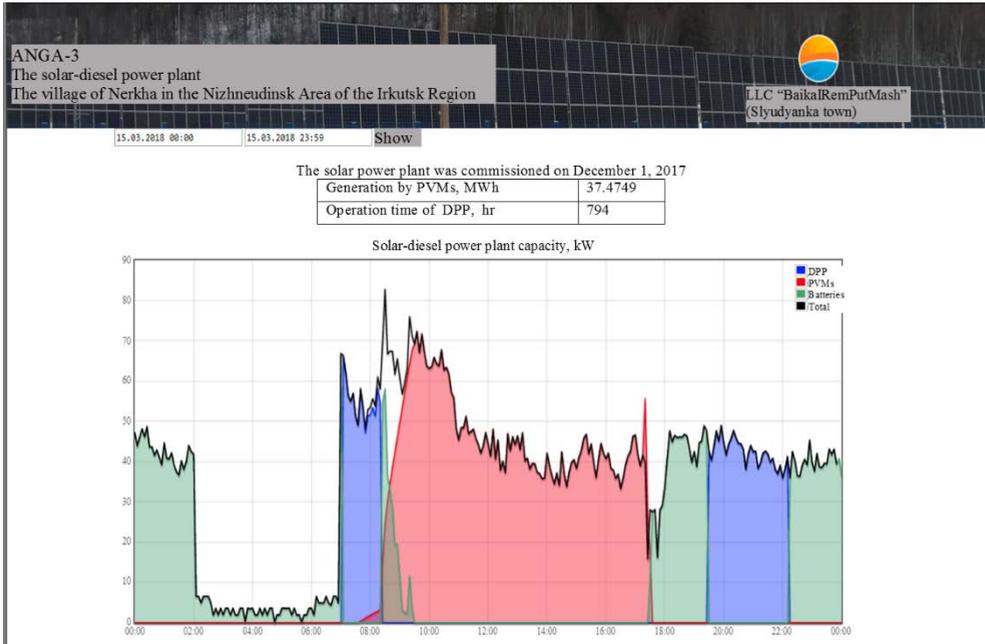


Fig. 5. Window of website anga3.ru as of 15.03.2018

According to the data as of May 1, 2018 the achieved indices are:

- the photovoltaic modules generated 45.13 thousand kWh;
- the time of the diesel power plant operation was 1004 hours out of 3515 hours of power supply to consumers.

5 Conclusions

The comparative analysis of the calculated data from the feasibility study and the actual data on solar-diesel power plant operation in the village of Nerkha of the Nizhneudinsk Area revealed the comparability of indices. According to the data of the feasibility study, the photovoltaic modules were planned to generate 65.7 thousand kWh of power for the period from December through April, in practice their generation is estimated at 45.13 thousand kWh. The economic effect for 5 months amounted to almost 800 thousand RUB owing to the substitution of 14.2 tons of diesel fuel.

Acknowledgements

Research was partially supported by the RFBR grants No. 17-48-380002.