

ASSESSING THE ACCURACY OF GLOBE THERMOMETER METHOD IN PREDICTING OUTDOOR MEAN RADIANT TEMPERATURE UNDER MALAYSIA TROPICAL MICROCLIMATE

N.G. Khrit^a, M.A. Alghoul^{*, b,c}, K. Sopian^{*, a}, A.A. Lahimer^a, and O.K. Elayeb^a

^a Solar Energy Research Institute, Universiti Kebangsaan Malaysia, 43600 Bangi, Selangor, Malaysia

^b Energy and Building Research Center, Kuwait Institute for Scientific Research, P.O. Box 24885, Safat 13109, Kuwait

^c Center of Research Excellence in Renewable Energy (CoRe-RE), Research Institute, King Fahd University of Petroleum and Minerals (KFUPM), Dhahran 31261, Saudi Arabia

*Corresponding authors: dr.alghoul@gmail.com (M.A. Alghoul), ksopian@ukm.edu.my (K. Sopian)

Abstract:

Assessing outdoor human thermal comfort and urban climate quality require experimental investigation of microclimatic conditions and their variations in open urban spaces. For this, it is essential to provide quantitative information on air temperature, humidity, wind velocity and mean radiant temperature. These parameters can be quantified directly except mean radiant temperature (T_{mrt}). The most accurate method to quantify T_{mrt} is integral radiation measurements (3-D short-wave and long-wave) which require using expensive radiometer instruments. To overcome this limitation the well-known globe thermometer method was suggested to calculate T_{mrt} . The aim of this study was to assess the possibility of using indoor globe thermometer method in predicting outdoor mean radiant temperature under Malaysia tropical microclimate. Globe thermometer method using small and large sizes of black-painted copper globes (50mm, 150mm) were used to estimate T_{mrt} and compare it with the reference T_{mrt} estimated by integral radiation method. The results revealed that the globe thermometer method considerably overestimated T_{mrt} during the middle of the day and slightly underestimated it in the morning and late evening. The difference between the two methods was obvious when the amount of incoming solar radiation was high. The results also showed that the effect of globe size on the estimated T_{mrt} is mostly small. Though, the estimated T_{mrt} by the small globe showed a relatively large amount of scattering caused by rapid changes in radiation and wind speed.

1. INTRODUCTION

Mean radiant temperature (T_{mrt}) is one of the key variables in the calculation of human energy balance and the assessment of thermal comfort through thermal indices. The concept of T_{mrt} considers radiative heat exchange between a human body and its surrounding which causes an energy gain –or loss– of a person depending on their surface temperatures and emissivity. It is defined as the uniform temperature of a hypothetical spherical surface surrounding the subject (emissivity

$\varepsilon=1$) that would result in the same net radiation energy exchange with the subject as the actual, complex radiative environment [1].

The determination of T_{mrt} is important for the assessment of human bioclimatology and heat stress in the urban environments. In such environments the radiation fluxes densities are highly influenced by urban structures that absorb, emit, reflect radiative energy in the shortwave and longwave spectrum [2]. This results in spatial and temporal variation in radiation fluxes densities, as well as radiant non-uniformity [2, 3]. Quantitative information of short- and long wave radiation fluxes is essential for an accurate estimation of the T_{mrt} [4]. For this detailed integral radiation measurements of radiation fluxes have been developed and used as a way to determine T_{mrt} [2-5]. The method offers significant advantages in terms of accuracy and fast response; however, it requires complex and costly equipment. Any attempt to use the method for further understanding of T_{mrt} from temporal and spatial scales (i.e., multi-site field measurements) is impractical and costly [6].

A simple and inexpensive method for estimating T_{mrt} is globe thermometer method [7]. It was developed and is commonly used for indoor environments [7, 8]. However, in outdoor environments with high intensity and variability of climate data, the accuracy of globe thermometer is sometimes unacceptable [5, 6, 9]. Despite of that, it is still attracting the attention as an alternative and low cost method for further evaluation in outdoor environment [2, 3, 5, 10, 11].

So far, limited researches in the literature compared globe thermometer method with the integral radiation measurements (radiometers) for the estimation of T_{mrt} under sub-tropical [12, 13] and tropical climate zones [5]. Kántor et al. (2014) compared measurements of standard 150mm-black globe thermometer with integral radiation measurements in order to improve the assessment of outdoor thermal comfort in subtropical Taiwan [13]. Tan et al. (2013) used a smaller (38 mm in diameter) gray-painted acrylic globe to validate the globe method by six-directional measurements in Singapore and suggested a modified T_{mrt} equation to obtain better values of T_{mrt} [5]. Therefore, the aim of this study is to examine the accuracy of two black-painted hollow copper globes (50mm and 150mm) in estimating T_{mrt} in the tropical outdoor urban setting of Malaysia when compared with the integral radiation measurements as a reference method. Also the effect of the globe diameter on the estimated T_{mrt} is investigated to determine whether the two globe thermometers are equally suitable for estimating T_{mrt} in tropical urban setting, or if each size has different estimation accuracy of the T_{mrt} .

2. MATERIALS AND METHOD

2.1. Measurement site and microclimate station unit

The measurement site is located at a pedestrian walkway at the main campus of the National University of Malaysia, Bangi, Malaysia ($2^{\circ}.55'N$, $101^{\circ}.46'E$). The main campus is spatially constrained by abutting landscape and tropical rainforest that necessitated the densification of the built environment at the university. The floor of the pedestrian walkway is made of flat concrete bricks and the adjacent buildings facades are made of red brick and grey concrete. The measurement site and the microclimate station unit are shown in Fig 1(a) and Fig 1(b), respectively.



Fig. 1(a-b): (a) The measurement site at the pedestrian walkway, (b) Microclimate station unit for measuring three-dimensional short and long-wave radiation fluxes, besides two globe thermometers of 50mm and 150mm diameters.

As shown in Fig 1(b), a microclimate station was equipped with a set of instruments as defined in Table 1. This includes sensors to measure air temperature, relative humidity, and wind speed. Three net radiometers, each consists of two pyranometers and two pyrgeometers, were set up on the station stand and oriented in east-west, north-south, upward and downward directions in order to measure the three-dimensional short and long-wave radiation fluxes. Two black-painted copper globe thermometers of 50mm and 150mm in diameters were installed within the space enclosed by the radiometers. The instruments were fixed at the same measuring point as much as possible and at a height of approximately 1.1m above the ground. The three-cup anemometer was set at height of 1.5m above the ground. The recording interval was set to 2-min-averages of 10s scan for radiation fluxes, and 2-min-averages of 30s scan for other microclimatic data.

Table 1: Measured parameters and instruments

Quantity	Instrument
Air temperature, T_a	Skye rht+ PT100 sensor
50-mm globe temperature, T_{g1}	Delta ohm, TP3276.2, PT100 sensor.
150-mm globe temperature, T_{g2}	Delta ohm, TP3275, PT100 sensor.
Air speed, V_a	Delta ohm, Probe with omnidirectional hot wire
Relative humidity, RH	Skye rht+
Shortwave and longwave radiation, K, L	Delta OHM, LP NET 14

3. MEAN RADIANT TEMPERATURE ESTIMATION METHODS

3.1. Integral (3-dimensional) radiation measurement method

This method provides the most accurate estimate of the T_{mrt} [6, 9]. A mean radiant flux density (S_{str}) have to be calculated first to determine a part of the radiation that is significant to a person [1]. S_{str} is a summation of the measurements of radiation fluxes from all six directions multiplied by the angular factors between a person and the surrounding surfaces, according to this equation [1, 9].

$$S_{str} = \alpha_k \sum_{i=1}^6 K_i F_i + \varepsilon_p \sum_{i=1}^6 L_i F_i \quad (1)$$

K_i = the short-wave radiation fluxes ($i = 1-6$)

L_i = the long-wave radiation fluxes ($i = 1-6$)

α_k = the absorption coefficient for short-wave radiation (standard value 0.7)

ε_p = the emissivity of the human body (standard value 0.97)

F_i = the angular factors between a person and the surrounding surfaces ($i = 1-6$).

For a standing –or walking– person, F_i is commonly set to 0.22 for radiation fluxes from the horizons and 0.06 for upward and downward radiation fluxes. For a sphere, F_i is 0.167 for all six directions.

The mean radiant temperature can be calculated in °C using equation (2) [1, 9]:

$$T_{mrt} = \left[\frac{S_{str}}{\varepsilon_p \sigma} \right]^{0.25} - 273.15 \quad (2)$$

Where, σ is the Stefan–Boltzmann constant ($5.67 \times 10^{-8} \text{ Wm}^{-2} \text{ K}^{-4}$)

3.2. Globe thermometer method

The method requires measurements of globe temperature in combination with measurements of air temperature and wind speed. Its theory was explained thoroughly by Kuehn et al., (1970) [14]. In the theory, when a globe thermometer is in equilibrium, the heat gained (or lost) by radiation is equal to the heat lost (or gained) through convection. Globe temperature represents a weighted average between radiant and ambient temperatures [5, 6, 9]. The formula to calculate the T_{mrt} is given by [7]:

$$T_{mrt} = \left[(T_g + 273.15)^4 + \frac{1.06 \times 10^8 V_a^{0.6}}{\varepsilon D^{0.4}} \times (T_g - T_a) \right]^{0.25} - 273.15 \quad (3)$$

Where T_g is the globe temperature (°C), T_a is the air temperature (°C), V_a is the air speed (m/s), ε is the globe emissivity (0.95 for a black globe) and D is the globe diameter (m). The weighting parameter $1.06 \times 10^8 V_a^{0.6}$ represents the globe's mean convection coefficient.

4. RESULT AND DISCUSSION

This case study was carried out in a greenery open urban space; the obtained results were based on one-day measurement in warm-humid conditions and intense solar radiation. The measurements were conducted on 8th October 2016 from 09:30 to 21:00 local time. The weather in this day brought hot humid conditions with a maximum air temperature of 33.9°C, average air temperature of 30.7°C and average wind speed of 1.29 m/s.

4.1. Three-dimensional short and long-wave radiation fluxes

The temporal course of shortwave fluxes from the four cardinal points K_{east} , K_{west} , K_{north} and K_{south} , as well as downward/incoming and upward/outgoing shortwave

fluxes K_{\downarrow} and K_{\uparrow} are shown in Fig. 2 (a). The high variation in shortwave radiation fluxes can be explained by rapid changes in weather conditions from clear to cloudy conditions. This resulted in a sharp fluctuation in K_{\downarrow} with a maximum value of 1042 W/m^2 recorded at 11:42. The upward shortwave radiation K_{\uparrow} followed the same pattern of K_{\downarrow} but with much less amounts (dependent on angle of incidence and surface albedo). Its maximum value (161.1 W/m^2) was recorded at the same time that the maximum K_{\downarrow} was recorded. In the morning when the site was sunny from east, K_{east} reached its maximum record of 450 W/m^2 at 09:54. When the site was sunny from west, K_{west} exhibited sharp increase (462 W/m^2) around 17:35.

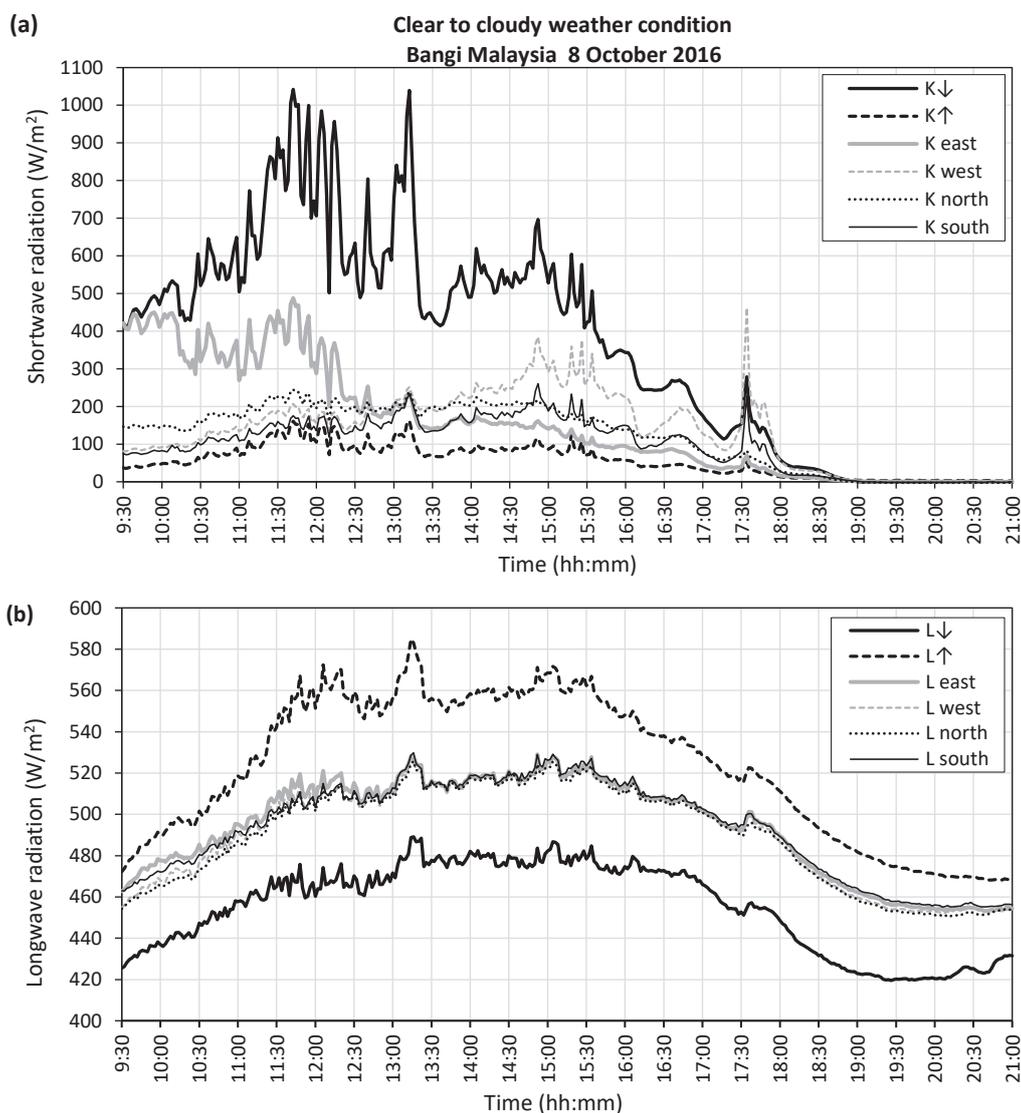


Fig. 2: (a-b): Three-dimensional shortwave and longwave radiation fluxes.

As shown in Fig. 2 (b), longwave radiation fluxes from the four cardinals, L_{east} , L_{west} , L_{north} and L_{south} were close and ranged from 450 to 530 W/m^2 , reaching their maximum in the afternoon. Longwave radiation from the sky L_{\downarrow} was lowest during the day, with a maximum record of 489 W/m^2 at 13:14. The upward long-wave radiation L_{\uparrow} was the highest amongst all longwave fluxes, with a maximum of 585 W/m^2 at 13:14. This was due to low albedo and high emissivity of the concrete floor, causing higher absorption of solar radiation and increased surface temperature and thus higher emittance of L_{\uparrow} .

4.2. Validation of globe thermometer in a tropical outdoor setting

In this study, two globe thermometers of different diameters (50mm and 150mm) were used; each consisted of a black-painted hollow copper sphere with temperature sensor in its centre. Temperatures registered for small globe T_{g1} and for large globe T_{g2} , as well as air temperature T_a and wind speed V_a were used to estimate mean radiant temperatures $T_{\text{mrt}(g1)}$ and $T_{\text{mrt}(g2)}$ according to equation (3). Integral radiation measurements from the net radiometers were used to obtain the reference mean radiant temperature, $T_{\text{mrt}(rad.)}$ for a standing person. As shown in Fig. 3, the rapid change in solar radiation caused a high variation in $T_{\text{mrt}(rad.)}$, and may also be reflected in the globe thermometers measurements. The maximum $T_{\text{mrt}(rad.)}$ was 70.6 $^{\circ}\text{C}$ and occurred at which the maximum K_{\downarrow} occurred, that is at 11:42.

The estimated $T_{\text{mrt}(g1)}$ and $T_{\text{mrt}(g2)}$ from globe thermometer measurements considerably overestimated T_{mrt} during the middle of the day; however they tended to underestimate it in the morning and late evening. The difference between the two methods was obviously high when the amount of incoming solar radiation was high. The highest difference between $T_{\text{mrt}(rad.)}$ and $T_{\text{mrt}(g1)}$ was 31.7 $^{\circ}\text{C}$, which occurred at 11:36, while the highest difference between $T_{\text{mrt}(rad.)}$ and $T_{\text{mrt}(g2)}$ was 26.9 $^{\circ}\text{C}$, which occurred at the same time. The general form of this finding has been confirmed in earlier studies [9, 11, 12, 15-17]. The high absorption of the black globe to short-wave radiation causes T_{mrt} to be overestimated. The maximum $T_{\text{mrt}(g1)}$ by the small globe was 95.2 $^{\circ}\text{C}$, while the maximum $T_{\text{mrt}(g2)}$ by the large globe thermometer was 91.5 $^{\circ}\text{C}$ at 11:42. The difference between $T_{\text{mrt}(g1)}$ and $T_{\text{mrt}(g2)}$ is mostly small during the day.

Also as shown in Fig. 3, the difference in globe size results in obviously different globe temperatures. The large globe temperature T_{g2} was higher than the small globe temperature T_{g1} throughout daytime, except in the morning and late evening, with a highest difference of 4.7 $^{\circ}\text{C}$, which occurred at 13:14.

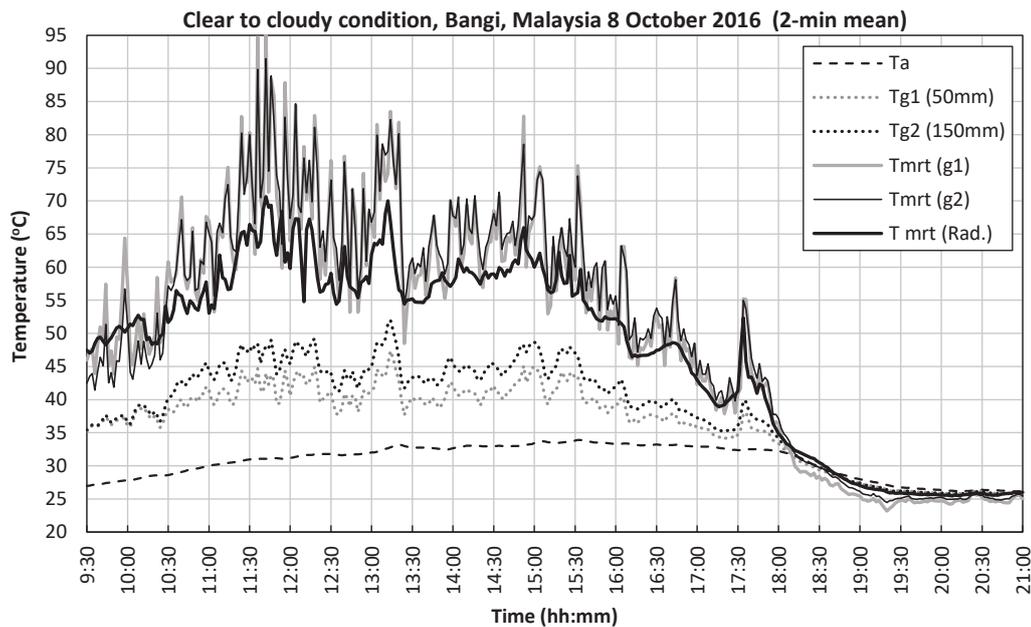


Fig. 3. Temperatures of the 50mm globe (T_{g1}), 150mm globe (T_{g2}) and air temperature (T_a). Estimated T_{mrt} using integral radiation measurements, T_{mrt} (rad.) and estimated T_{mrt} using globe thermometer of 50mm diameter, T_{mrt} (g1) and 150mm diameter, T_{mrt} (g2).

4.3. Effect of the globe size and outdoor condition on the response time

In Fig. 3, there was a large amount of scattering in T_{mrt} data. This was because of the delay in the globes' response to rapid changes in radiation and wind speed. The response of the standard black globe is too long; it takes about 15 min to reach equilibrium [12, 16]. Thus, in case of rapidly changing outdoor conditions, the globe equilibrium is never reached, resulting in scatter in T_{mrt} data [1, 9].

It is also seen that the small globe thermometer has a faster response than the large one. As shown in Fig. 4 (a), this resulted in a rather larger scatter in the estimated T_{mrt} (g1) by the small globe (lower R^2). This finding agreed with results of other researchers [6, 9, 12, 15-17], who reported that downsized globe thermometers (less than 50 mm in diameters) have faster response time (5-10 min) but also give a relatively larger scatter in T_{mrt} values. The results in Fig. 4 (a) indicate that the accuracy of T_{mrt} (g1) and T_{mrt} (g2) was reduced considerably when the amount of shortwave radiation increased. This can be clarified in Fig. 4 (b) by plotting the difference between T_{mrt} (g1) and T_{mrt} (rad.) and between T_{mrt} (g2) and T_{mrt} (rad.) against K_{\downarrow} . As shown, the black colour of the globes causes the influence of shortwave radiation to be overestimated, and thus decreased accuracy of T_{mrt} .

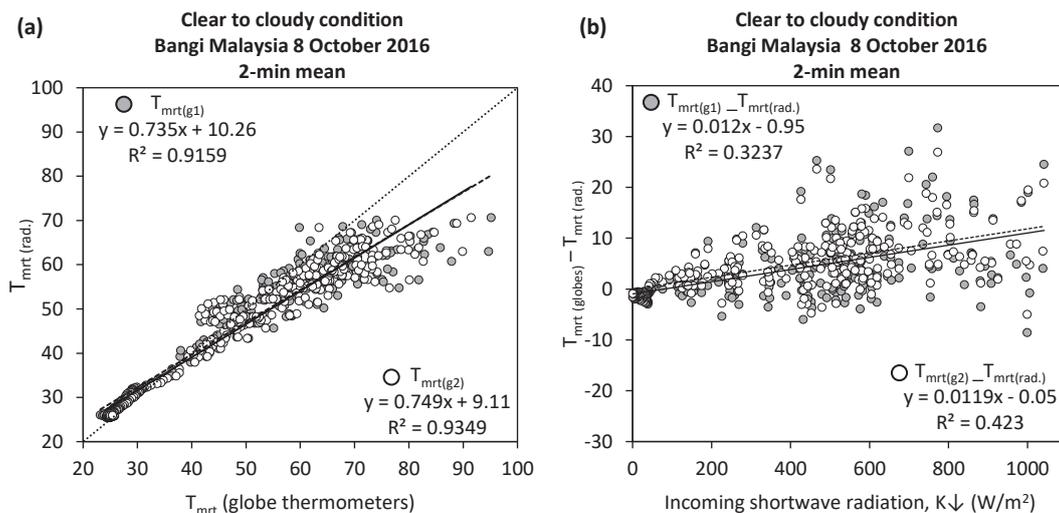


Fig. 4 (a-b); (a) T_{mrt} determined by integral radiation measurements, $T_{mrt (rad.)}$ *versus* that estimated by 50mm copper globe thermometer, $T_{mrt (g1)}$ and 150mm copper globe thermometer, $T_{mrt (g2)}$; (b) $T_{mrt (g1)}$ and $T_{mrt (g2)}$ differences to $T_{mrt (rad.)}$ *versus* incoming short-wave radiation, K_{\downarrow} .

In Fig. 5, $T_{mrt (g1)}$ and $T_{mrt (g2)}$ differences to $T_{mrt (rad.)}$ were plotted against wind speed. The results indicate that wind speed fluctuation had a slightly higher influence on the small globe, causing a higher scattering in the calculated T_{mrt} values (lower R^2).

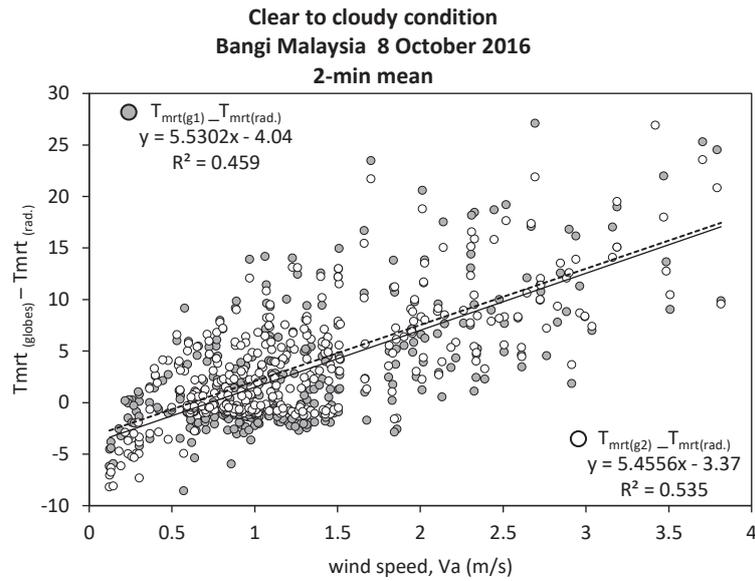


Fig 5: $T_{mrt (g1)}$ and $T_{mrt (g2)}$ differences to $T_{mrt (rad.)}$ *versus* wind speed

5. CONCLUSION

In this study globe thermometer method was used to estimate T_{mrt} , using two black-painted copper globes of 50mm and 150mm in diameters. Estimated T_{mrt} results were compared with integral radiation measurements as a reference method. The study showed that, in tropical outdoor urban setting, the globe thermometer method overestimated T_{mrt} during the middle of the day. In morning and late evening the difference between T_{mrt} data from the two methods became relatively small. The globe temperatures of the large and small globes increased as the amount of radiation increased, resulting in a reduced accuracy of the estimated T_{mrt} .

The results also showed that the obtained T_{mrt} values from the large and small globes fluctuated greatly with time; their differences from the reference T_{mrt} resulted in a large scatter in the function of radiation and wind speed. Furthermore, results showed that the small globe has a shorter delay to changes in outdoor conditions than the large globe. However, it gives slightly higher scatter in T_{mrt} values than the large globe, particularly during rapid changes in radiation and wind speed.

REFERENCES

- [1] Matzarakis A, Rutz F, Mayer H. Modelling radiation fluxes in simple and complex environments: basics of the RayMan model. *International Journal of Biometeorology*. 2010;54:131-9.
- [2] Gulyás Á, Unger J, Matzarakis A. Assessment of the microclimatic and human comfort conditions in a complex urban environment: modelling and measurements. *Building and Environment*. 2006;41:1713-22.
- [3] Ali-Toudert F, Djenane M, Bensalem R, Mayer H. Outdoor thermal comfort in the old desert city of Beni-Isguen, Algeria. *Climate Research*. 2005;28:243-56.
- [4] Höppe P. A new procedure to determine the mean radiant temperature outdoors. *Wetter und Leben*. 1992;44:147-51.
- [5] Tan CL, Wong NH, Jusuf SK. Outdoor mean radiant temperature estimation in the tropical urban environment. *Building and Environment*. 2013;64:118-29.
- [6] Johansson E, Thorsson S, Emmanuel R, Krüger E. Instruments and methods in outdoor thermal comfort studies—The need for standardization. *Urban Climate*. 2014;10:346-66.
- [7] ISO I. 7726, Ergonomics of the Thermal Environment, Instruments for Measuring Physical Quantities. Geneva: International Standard Organization. 1998.
- [8] Alfano FRdA, Dell’Isola M, Palella BI, Riccio G, Russi A. On the measurement of the mean radiant temperature and its influence on the indoor thermal environment assessment. *Building and Environment*. 2013;63:79-88.
- [9] Thorsson S, Lindberg F, Eliasson I, Holmer B. Different methods for estimating the mean radiant temperature in an outdoor urban setting. *International Journal of Climatology*. 2007;27:1983-93.
- [10] Kántor N, Unger J, Gulyás Á. Subjective estimations of thermal environment in recreational urban spaces—Part 2: international comparison. *International Journal of Biometeorology*. 2012;56:1089-101.
- [11] Nikolopoulou M, Lykoudis S. Thermal comfort in outdoor urban spaces: analysis across different European countries. *Building and Environment*. 2006;41:1455-70.
- [12] Wang S, 王上. Development of globe thermometers for measuring radiation and air speed. HKU Theses Online (HKUTO). 2015.
- [13] Kántor N, Kovács A, Lin T-P. Looking for simple correction functions between the mean radiant temperature from the “standard black globe” and the “six-directional” techniques in Taiwan. *Theoretical and Applied Climatology*. 2015;121:99-111.
- [14] Kuehn L, Stubbs R, Weaver R. Theory of the globe thermometer. *Journal of applied physiology*. 1970;29:750-7.
- [15] Spagnolo J, De Dear R. A field study of thermal comfort in outdoor and semi-outdoor environments in subtropical Sydney Australia. *Building and Environment*. 2003;38:721-38.
- [16] Nikolopoulou M, Baker N, Steemers K. Improvements to the globe thermometer for outdoor use. *Architectural Science Review*. 1999;42:27-34.
- [17] Handbook A. Fundamentals. American Society of Heating, Refrigerating and Air Conditioning Engineers, Atlanta. 2001;111.