

Experimental dynamic analysis of traffic seismicity effect on historical building

Daniel Papan^{1,*}, *Zuzana Papanova*¹, and *Katarina Krkoskova*²

¹University of Zilina Technology, Faculty of Civil Engineering, Zilina, Slovakia

²HILTI Slovakia s.r.o, Zilina, Slovakia

Abstract. Nowadays, rising intensity of traffic is significant effect on entire world, because the endanger risk of adjacent buildings rises. Endanger risk is caused by traffic vibrations spreading through the bedrock, i.e. by traffic seismicity. Historical buildings are specific group of structures, which are especially sensitive on traffic seismicity effects. The aim of this article is experimental dynamic analysis of traffic seismicity effect on Traction substation historical building in Horný Smokovec, district Poprad in Slovakia. This structure is directly exposed to road and rail traffic effects. The experimental measurements of vibration levels were implemented, whose outputs had been vibration acceleration time records on this structure. In all experimental measurements, vibration levels and its transmission through the bedrock were detected, because of train crossing effecting on tower part of object (because the tower part is nearby the railway and it is also the highest place on building) and vehicle crossing. The study of dynamic interaction is implemented within the amplitude analysis. The spectral analysis and frequency transmission is presented in the paper within the frequency analysis. The evaluation of implemented traffic seismicity experimental dynamic analysis effecting on the traction substation object is the end part of analysis.

Keywords: traffic seismicity, experimental dynamic analysis, experimental measurements

1 Introduction

Vibrations induced by traffic increasingly effect the environment. This element brings oneself to noting more, so it also appears in latest studies [1]. Nowadays, despite the importance of the issue, the unforcedness about vibrations induced by traffic and their effects on historical buildings is still limited. The aim of this article is dynamic experimental analysis of Traction Substation historical building due to traffic seismicity in Horný Smokovec district Poprad. This structure is directly exposed to road and rail traffic effects. Two experimental measurements were implemented on this object, whereby 12

* Corresponding author: daniel.papan@fstav.uniza.sk

accelerometers of low frequency seismic type and measuring and evaluating technique by company Brüel & Kjær were used. Measurements outputs are vibration acceleration time records due to train crossing and middle heavy vehicle crossing. Experimental measurements evaluation consists of amplitude and frequency analysis of vibration acceleration time records. Results of amplitude analysis are vibration velocity effective values, whereby the maximal ones of them were assessed according to [2]. The dynamic interaction coefficient k_{DI} describing the character of vibration transmission type from the source to the object was also detected for these values. Within the frequency analysis, vibration acceleration power spectral densities and frequency response functions, which describe what frequency range is typical for this type of dynamic load, are presented. The end part of analysis is evaluation of implemented experimental dynamic analysis of traffic seismicity effecting on Traction Substation object.

2 Theoretical basis of identified issue and experimental equipment

The parasismic effects caused the vibration of the structures and it can be analysed by random vibration approach mainly in evaluation areas as follows [9]:

- The time domain (signal in time – $x(t)$),
Effective value (mean value, max value, min value, ect.), root mean square (*rms*)

$$\sigma_x = RMS = x_{ef} = \sqrt{\frac{1}{T} \int_0^T x(t)^2 dt}. \quad (1)$$

- Correlation (correlation between two random processes),
Autocorrelation function (cross correlation function, ect.)

$$R_{xx}(\tau) = \lim_{T \rightarrow \infty} \frac{1}{T} \int_0^T x(t)x(t+\tau)dt. \quad (2)$$

- The frequency domain (harmonic analysis),
- Spectral evaluation (transformation time processes to frequency domain),
Power Spectral Density (PSD)

$$G_{xx}(f) = 2 \int_{-\infty}^{\infty} R_{xx}(\tau) e^{-i2\pi f\tau} dt \quad (3)$$

Coherency function

$$\gamma_{xy}(f)^2 = \frac{|G_{xy}(f)|^2}{G_{xx}(f)G_{yy}(f)} \leq 1. \quad (4)$$

Gain factor, Transfer function, Frequency Response Functions (FRF)

$$H(if) = \frac{G_{xy}(f)}{G_{xx}(f)}. \quad (5)$$

- Probabilistic area (statistic parameters),
- Informatics (effective – determined signal in noise).

These formulas are basic equations for further analysis in the paper. All applications of this theoretical formulation (continuous function of random effects) are transformed to the discrete domain. Discrete data are evaluated as random signal and they are processed as digitalized records of vibration accelerations in time. So the numerical tool Sigview was used as relevant analyzer for the experimental solutions.

For the data recording the powerful system PULSE were used. PULSE is a versatile, task-oriented system for noise and vibration analysis. It provides the platform for a range of PC-based measurement solutions from Brüel & Kjær. A PULSE system consists of a PC with LAN interface, PULSE software, Windows® 2000, XP or Windows Vista®, Microsoft® Office and idea - based data acquisition front-end hardware.

A system can contain more than 300 input channels located in up to 10 front-ends. The input/ output conditioning modules perform signal conditioning and digitalize the transducer signals. Measured line for the case study was created from parallel modules connected set and the others components which are shown in Fig. 1.

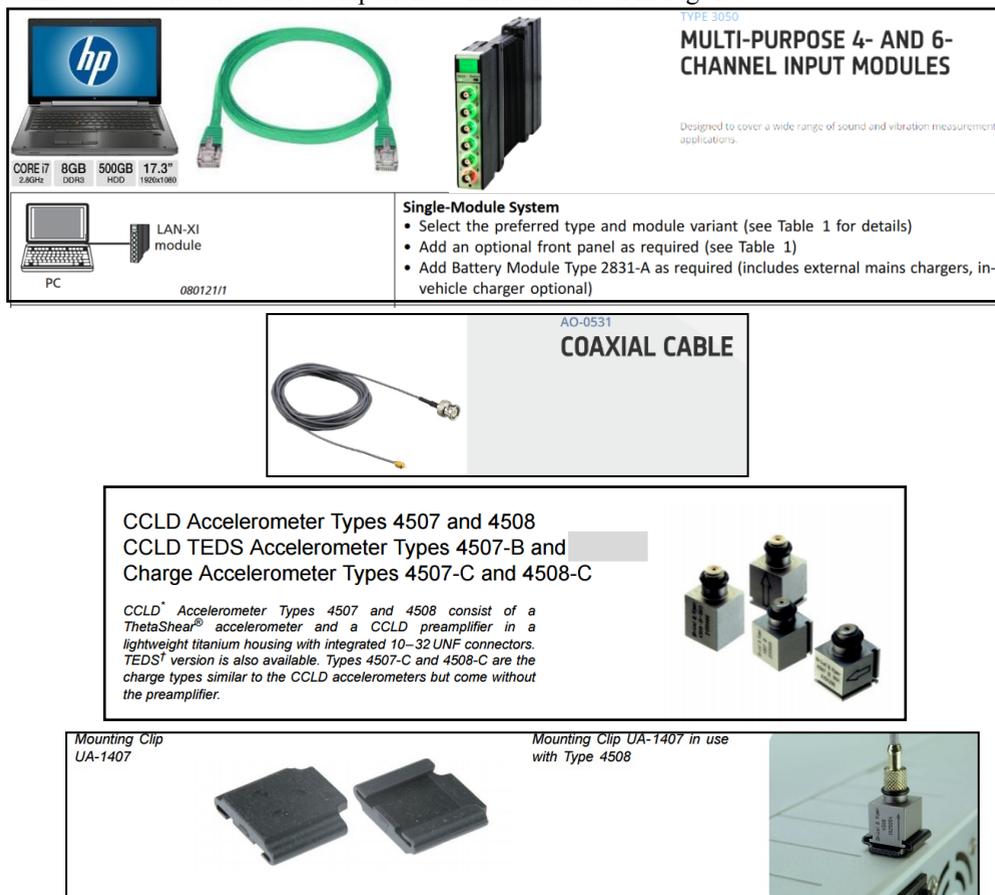


Fig. 1. Used measured tools Brüel & Kjær with software PULSE included [11]

As the complex parameter evaluating technical seismicity impact the most effective is the concept based on Coefficient of dynamic interaction (k_{DI}). The interaction of shear deformation surface waves with the foundation structure affect the transfer wave energy to the support structure [10]. For the purposes of technical diagnostics of vibration levels should be determined the coefficient of dynamic interaction k_{DI} (respectively k_2). Dynamic

interaction coefficient can be determined as the ratio of the value of the vibration energy absorbed structure (effective level of vibration of the structure v_K) and the incoming vibration energy of the subsoil (effective level of vibrations subsoil v_P). Energy balance is best and easiest to express using effective values of vibration amplitudes (*rms* - dynamic process values integral).

In the present case study the coefficient of dynamic interaction were determined used the results of spectral analysis.

$$k_{DI} = \frac{v_{k,RMS}}{v_{k,RMS}} \quad (6)$$

Due to the interaction of waves in the soil (wave reflection, wave interference, etc.) transfer coefficient generally takes the value $k_{DI} < 1,0$. On this basis, it is necessary to calculate the expected values of technical seismicity vibration effect at the base joints multiply k_{DI} value. In the practical experiment, the ISM (Impulse Seismic Method) and the technical seismicity results can be applied to expression v_{RMS} and k_{DI} values (Tab. 3).

3 Characteristics of Traction Substation historical building

Traction Substation is located in Horný Smokovec on the railway Poprad – Starý Smokovec that is first source of vibration. It belongs to the list of national heritage buildings of Slovakia and it is registered as NHB 706-11673/0. It was built in Art Nouveau style ca. in 1912. The road II/537 leads nearby the structure and its traffic second source of vibration. Fig. 2



Fig. 2. Traction Substation views from the railway and the road.

4 Preparation and process of experimental measurements

Experimental measurement was separated in two parts, whereby the vibration level from two different vibration sources was measured in both parts. Vibration level due to road traffic, type and character of vibration transmission from the road to the object was measured in first part. Accelerometers were located in the area between the road and the object. Second part of measurement includes the vibration level measurement due to rail traffic, also the type and character of vibration transmission from the railway to the object. Accelerometers were placed between the railway and the object. Fig. 3.

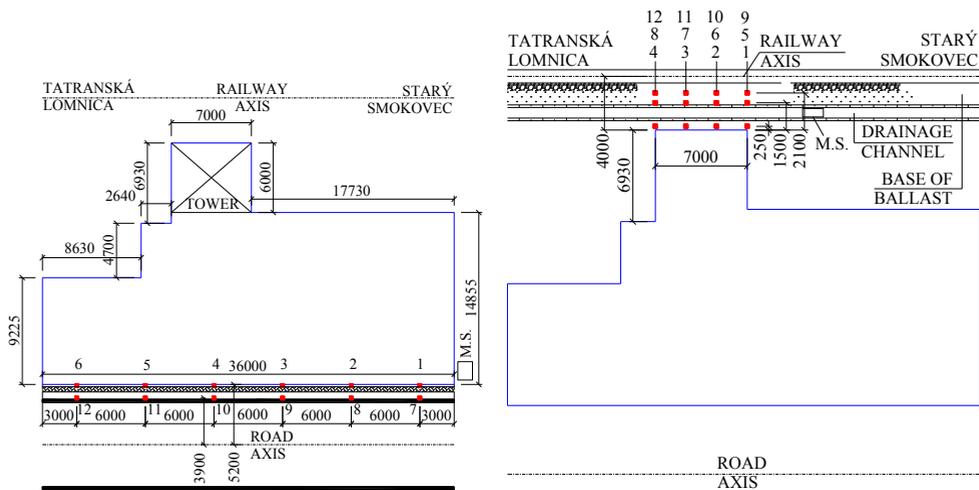


Fig. 3. Accelerometers positions in first and second part of measurement.

5 Experimental measurements results

Outputs of both experimental measurements are vibration acceleration time records in measured points. The values from these records were analyzed in the program for signal analyses, Sigview.

- **Time domain:**

Within the experimental measurements evaluation in time domain were detected these values by measured vibration acceleration analysis:

- a_{RMS} [m/s²] – vibration acceleration effective value
- $a_{MIN, MAX}$ [m/s²] – minimal / maximal vibration acceleration values
- v_{RMS} [m/s] – vibration velocity effective value and compared with limit Standard value v_{ef} [m/s] in [2]

- **Frequency domain:**

- PSD (a) [(m/s²)²/Hz] – Power spectral density of vibration acceleration
- FRF (a) [-] – Frequency response function of vibration acceleration

5.1 Experimental measurement no. 1 – results

5.1.1 Amplitude analysis

Maximal effective vibration acceleration value was attained at the vibration source near the measured point 11, and that during the bus vehicle crossing, $a_{RMS} = 0.0308$ m/s² that accords with vibration velocity effective value $v_{RMS} = 5.34 \cdot 10^{-4}$ m/s. Maximal effective vibration acceleration value was attained at the object in the measured point 4, $a_{RMS} = 0.0100$ m/s² that accords with vibration velocity effective value $v_{RMS} = 8.94 \cdot 10^{-5}$ m/s. Tab. 1. This value is assessed according to [2].

Table 1. Analyzed values of a_{RMS} , a_{MAX} , a_{MIN} in measurement no. 1 (road – object)

M1	a_i [m/s ²]		
Point	a_{RMS}	a_{MAX}	a_{MIN}
1	0.0022	0.0087	-0.0067
2	0.0085	0.0258	-0.0272
3	0.0092	0.0315	-0.0255
4	0.0100	0.0312	-0.0326
5	0.0067	0.0229	-0.0310
6	0.0052	0.0200	-0.0191
7	0.0123	0.0401	-0.0456
8	0.0234	0.0779	-0.0723
9	0.0204	0.0589	-0.0625
10	0.0293	0.0765	-0.0322
11	0.0308	0.0338	-0.0227
12	0.0224	0.0767	-0.0876

The Traction Substation building can be typed to resistance class “A” according to Table NB.8.2. in [2] and also to significance class of buildings “II” according to Table NA.1 in [3]. Limit value of effective vibration velocity $v_{ef} = 0.7$ mm/s responses to this classification. The value of effective vibration velocity detected by analysis is $v_{RMS} = 0.0894$ mm/s. From these values results that this object is not needed to be analyzed in terms of I. ultimate state due to rules in [2].

5.1.2 Frequency analysis

The part of frequency range up to 15 Hz can be attributed to bus vehicle vibration due to [4], [5] and other references. Remaining part of frequency range from 15 Hz up to 75 Hz can be attributed to road pavement vibration due to [6], [7] and other ones. Analysis is aimed to frequency range 15 – 120 Hz.

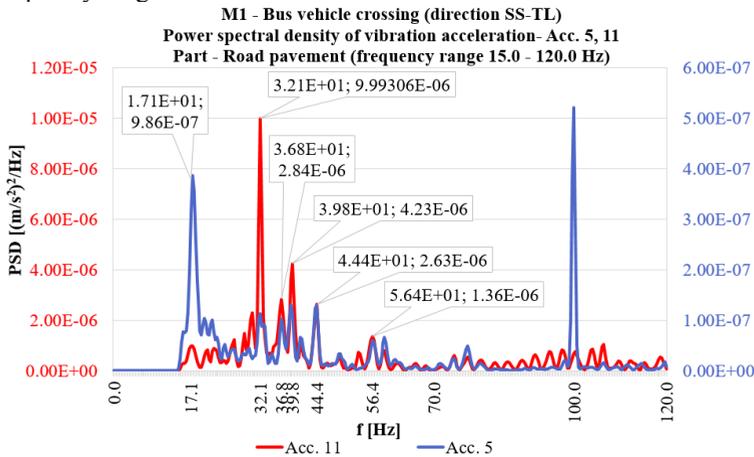


Fig. 4. PSD (a) of road pavement in frequency range 15 – 120 Hz, Acc. 5, 11.

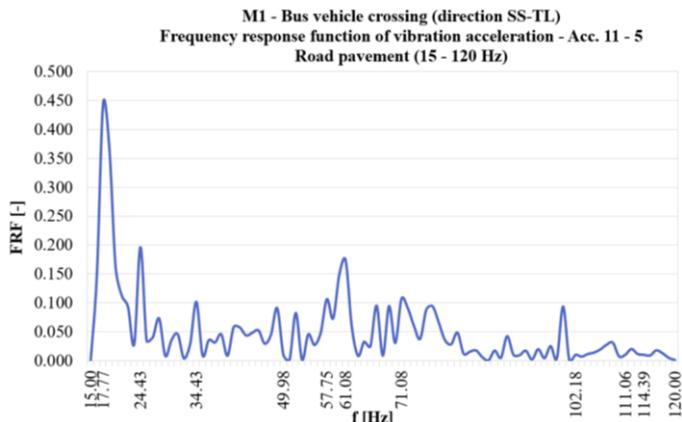


Fig. 5. FRF (*a*) of road pavement in frequency range 15 – 120 Hz (between the road and the object).

Dominant frequencies characterizing vehicle vibrations are 6.6 Hz and 13.3 Hz. The area of dominant frequencies describing road pavement vibrations is 17 – 30 Hz.

5.2 Experimental measurement no. 2 – results

5.2.1 Amplitude analysis

Maximal value of effective vibration acceleration was attained in point no. 10, $a_{RMS} = 0.1840 \text{ m/s}^2$, which accords with $v_{RMS} = 5.63\text{E-}4 \text{ m/s}$. The value of $a_{RMS} = 0.0478 \text{ m/s}^2$ was attained in point no. 4 nearby the tower part of object. Tab. 2. This value accords with $v_{RMS} = 1.34\text{E-}4 \text{ m/s}$ that is assessed in next step due to [2].

Table 2. Analyzed values of a_{RMS} , a_{MAX} , a_{MIN} in measurement no. 2 (road – object)

M2	ai [m/s ²]		
Point	a_{RMS}	a_{MAX}	a_{MIN}
1	0.0256	0.1139	-0.1205
2	0.0301	0.1376	-0.1156
3	0.0438	0.1655	-0.1747
4	0.0478	0.2563	-0.2828
5	0.0792	0.5640	-0.5013
6	0.0903	0.4826	-0.7300
7	0.1046	0.6100	-0.5391
8	0.0868	0.4730	-0.5892
9	0.1760	0.8924	-1.1091
10	0.1840	1.8521	-1.6053
11	0.1684	1.3148	-1.2712
12	0.1834	1.1371	-1.5874

Limit value of effective vibration velocity is $v_{ef} = 0.7 \text{ mm/s}$. Analyzed value is $v_{RMS} = 0.134 \text{ mm/s}$. From these values results that this object is not needed to be analyzed in terms of I. ultimate state due to rules in [2].

5.2.2 Frequency analysis

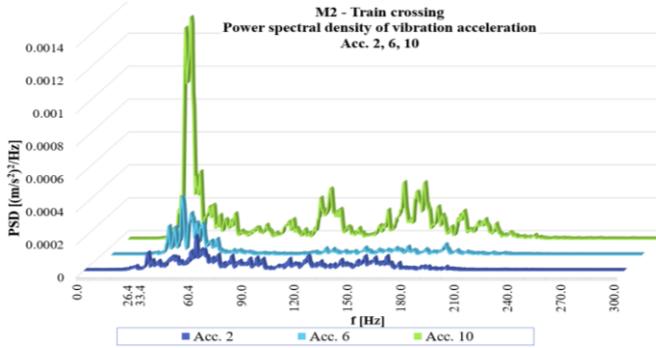


Fig. 6. PSD (a) of train crossing in M2 (between the railway and the object).

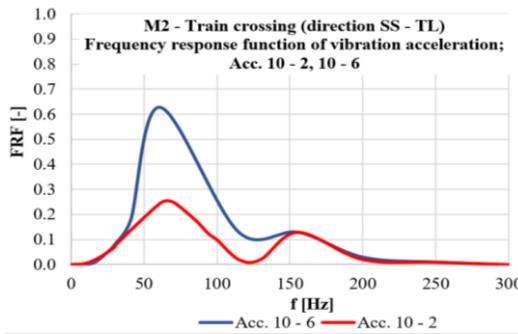


Fig. 7. FRF (a) of train crossing in M2 (between the railway and the object).

These diagrams mean, that dominant frequencies are 30 – 50 Hz and 50 – 70 Hz. Frequency range 30 – 50 Hz dominates near the rail, that accords with rail string vibration and rail sleepers vibration due to [8]. Frequency range 50 – 70 Hz dominates farther from the rail, so mostly directly nearby the tower part of object that accords with vibration of rail sleepers – base of ballast system and base of ballast – bedrock system due to [8].

The examples of the frequency domain analysis are presented in Fig. 4 – Fig. 7. Tab. 3 shows analyzed values of k_{DI} in measurements.

Table 3. Analyzed values of k_{DI} in measurements

Road traffic			
Points	$a_{RMS,i}$	$a_{RMS,j}$	k_{DI}
1...7	0.0022	0.0123	0.1788
2...8	0.0085	0.0234	0.3632
3...9	0.0092	0.0204	0.4509
4...10	0.0100	0.0293	0.3412
5...11	0.0067	0.0308	0.2175
6...12	0.0052	0.0224	0.2321
Railway traffic			
1...5	0.0022	0.0067	0.3283
2...6	0.0085	0.0052	0.6110
3...7	0.0092	0.0123	0.7411
4...8	0.0100	0.0234	0.4272

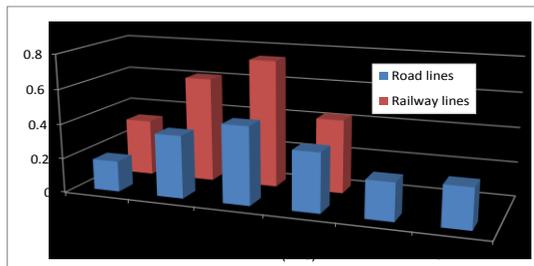


Fig. 8. Coefficient of dynamic interaction k_{DI} .

6 Conclusions

The authors were guided by the literature in this field during completing this contribution and solving issues during analyses. (e.g. [12])

The main aim of the analysis was to identify the spectral characteristics of selected historical structure and response due to microtremor effect involved by roadway and railway traffic. For this building the dominant frequency bands were identified which indicates natural frequencies peaks. For this case study of the selected sensitive monumental building the frequency transfers functions (via spectral characteristics) were obtained. The vibration level which decreases depending on the distance from the vibration source was observed. This case study showed precision technique to obtain dominant frequency bands of the structure dynamic response for railway and for roadways excitation.

The vibrations problems near roads, railways and their propagation to the surroundings affect on buildings and comfort of people. Vibration levels increase in residential areas cause: increasing axle loads, speeds of vehicles with higher weight levels, quality of surface transport routes and also residential quarters situating closer to traffic road.

Analysis of the interaction dynamic process brings new knowledge that can be applied into the actual building structures design. It also can be used as the evaluation and prediction of the structural dynamic response due technical seismicity.

The experimental procedure is relevant for technical practice. Spectral analysis can confirm viscoelastic action of soil structure. Comparison of different soil-structure spectral parameters in the interaction area confirms dominant bands from the traffic effects but also can identify investigated structure natural frequencies with attenuation.

Furthermore, the methodology of k_{DI} can be used as the introduction and its practical application in civil engineering practice design and assessing of technical seismicity vibration intensity affecting on structures. The results obtained from the dynamic diagnosis confirmed the relevance of this coefficient introduction into the practice. Even if the Slovak standard limits were not exceed based on the k_{DI} conception further and more describing parameters can be expressed (coefficient of basement inhomogeneity, structural health coefficients...)

References

1. M. Crispino, M. D'Apuzzo, R. Lamberti, G. Antonnuci, R. Constanzo., Proceedings of the International Symposium on Environmental Impact of Road. Porto, 177-191. *Road traffic induced vibrations in a field of investigation in the city of Naples* (1999)
2. *Eurocode 8. STN EN 1998-1/NA: Designing structures on seismic load. Part 1: General rules, Seismic loads and rules for buildings.* National Appendix.

3. *Eurocode 8. STN EN 1998-2/NA: Navrhovanie konštrukcií na seizmickú odolnosť. Časť 2: Mosty. Národná príloha. (Eng.: Designing structures on seismic resistance. Part 2: Bridges, National appendix.)*
4. A. Galal, *Frequency Response Considering Driver-seat*. In: International Journal of Scientific Research Engineering & Technology (IJSRET), ISSN 2278 – 0882 Vol.4, Issue 4, Car Dynamics using Quarter Model and Passive Suspension (2015)
5. J. Melcer, G. Lajcakova, *Numerical Simulation of Vehicle Motion along the Road Structure*. In: Roczniki Inzynierii Budowlanej – Zeszyt: Komisja Inzynierii Budowlanej Oddział Polskiej Akademii Nauk, Katowice, ISSN 1505-8425 (2012)
6. J. Bencat, D. Papan, *Investigation of the microtremor due to road traffic means*. In: Wplywy sejsmiczne i parasejsmiczne na budowe : X. Sympozjum. - Kraków: Institut Mechaniki Budowli Politechniki Krakowskiej, (2003)
7. H. Zhao, L. Qin, J. Ling, *Test and Analysis of Bridge Transducers for Harvesting Energy from Asphalt Pavement*. In: International Journal of Transportation Science and Technology, Volume 4, Issue 1, 1 March (2015)
8. M. Moravcik, M. Moravcik, *Mechanika železničných tratí. 3. diel Experimentálna analýza namáhania a pretvorenia komponentov trate*. Žilina: Žilinská univerzita v Žiline, 2002. 220 s. ISBN 80-7100-985-7 (Eng.: *Railway mechanics. Part 3. Experimental analysis of strain and displacement of railway elements.*)(2002)
9. D. Papan, *Paraseismic loading of bridge structures*. In: Computational structures technology : proceedings of the eleventh international conference : Dubrovnik - Croatia, Stirlingshire: Civil-Comp Press (2012)
10. Z. Papanova, *Soil-structure dynamic interaction experimental analysis due to railway traffic* In: GEOconference on science and technologies in geology, exploration, 14th International Multidisciplinary Scientific Geoconference SGEM (2014)
11. Electronic document: <https://www.bksv.com/media/doc/bu0228.pdf>
12. M. Maldonado, D. Le Houedec, *Vibration induced by trams: Propagation, isolation and perception*, Proc. 6th Intern. Conf. on Structural Dynamics: EUROLYN 2005, Millpress, vol. 3, pn. 2047-2052 (2005)