

# Promotion of Biogasification Efficiency by Pretreatment and Bioaugmentation of Corn Straw with Microbial Consortium

Qili Zhu<sup>1,2+</sup>, Yanwei Wang<sup>1+</sup>, Furong Tan<sup>1</sup>, Bo Wu<sup>1</sup>, Lichun Dai<sup>1</sup>, Mingxiong He<sup>1\*</sup>, and Guoquan Hu<sup>1\*</sup>

<sup>1</sup>Biomass Energy Technology Research Center, Biogas Institute of Ministry of Agriculture, Chengdu, P. R. China, 610041

<sup>2</sup>National Agricultural Science and Technology Center, Chengdu, P. R. China, 610041

**Abstract.** To better understand the comparative effects between pretreatment and bioaugmentation methods on the promotion of corn straw biogasification efficiency, we analysed the cellulase activity, cellulose degradation rate, surface structure characteristics, and biogas production of corn straw that had been pretreated with aerobic microbial consortium (AMC). In addition, we also studied the effect of bioaugmentation using anaerobic microbial consortium (ANMC) on corn straw biogasification efficiency. The results from our study demonstrated that the cumulative methane generated from AMC and ANMC were 233.09 mL·g<sup>-1</sup> VS and 242.56 mL·g<sup>-1</sup> VS, which was increased compared to the control by 6.89% and 11.23%, respectively. We also observed that ANMC could also function to dramatically promote methane content during the anaerobic digestion of corn straw. This study demonstrated that AMC and ANMC were both able to promote the biogasification efficiency of corn straw, however, ANMC was found to perform better compared to AMC.

## 1 Introduction

The energy crisis and environmental pollution have become two major problems in the development of the world today (Yan et al., 2012). Straw biomass biogasification technology is one of the key technologies existing today that have the potential to effectively alleviate these problems. Indeed, straw biomass biogasification is widely employed for the treatment of organic waste and the production of methane (Bond and Templeton, 2011; Rouches et al., 2016). However, the efficiency of straw biogasification is currently relatively low due to its recalcitrance that has been demonstrated to restrict the resource utilization process of agricultural waste (Zheng et al., 2014). Therefore, some measurements like pretreatment and/or bioaugmentation should be adopted to increase biogas production from lignocellulosic material, further to resolve such technological difficulties.

Pretreatment technology can be carried out in an effort to improve lignocellulose hydrolysis and further promote methane yields (Hua et al, 2016). Previous studies have studied the effect of different pretreatment methods on the enhancement of the anaerobic digestion efficiency of lignocellulosic material. For example, methane production from reed which was pretreated with steam explosion was found to be increased by 89% (Lizasoain et al., 2016), while that of rice straw that was pretreated with fungus was observed to be increased by 78.3% (Mustafa et al., 2016). In general, the pretreatment methods utilized in biogas production can be classified into three different categories: physical, chemical, and biological (Wen et al., 2015). Biological pretreatment uses microorganisms to

digest the cell walls of plant biomass and has generated attention within the field due to its low energy consumption, cost-effectiveness, and environmental friendliness (Agbor et al., 2011; Zheng et al., 2014). Microbial consortium represents one of the efficient biological pretreatment methods and has been demonstrated to be able to impose synergistic effects among different functional microorganisms. In addition, it can remove feedback inhibition of metabolites and promoting lignocellulose degradation efficiency in comparison with that when a single strain is used, or physical and chemical methods are used (Chandel and Singh, 2011; Zhong et al., 2016). The use of microbial consortium for pretreatment has been demonstrated to be advantageous for large-scale biomass production due to the fact that, in the majority of cases, lignocellulosic feedstock sterilization is not necessary, which could help to lower costs and save time (Bruni et al., 2010; Lu et al., 2009; Zheng et al., 2014; Hua et al, 2016). In general, there are two main microbial consortiums that are utilized for the pretreatment of lignocellulosic biomass. These include one type that gains directly from a special environment, such as rumen fluid or digested sludge. The other types, including MC1 (Hua et al, 2016; Yuan et al., 2016), WSD-5 (Wen et al., 2012), XDC-2 (Zhang et al., 2016), and MCHCA (Poszytek et al., 2016) are all generated from the natural environment (soil, sludge, etc.). It has been demonstrated that both two types of microbial consortium can function to promote the biogasification efficiency of straw inordinately.

Bioaugmentation, which is used to improve refractory organics catabolism via the addition of selected strain/s or mixed cultures to biological systems, was initially

\* Corresponding author: [hemingxiong@caas.cn](mailto:hemingxiong@caas.cn) & [huguoquan@caas.cn](mailto:huguoquan@caas.cn).

+ Qili Zhu and Yanwei Wang contributed equally to this work.

introduced into AD processes in recent years as an alternative method aimed to increase biofuel product yield, such as ethanol, hydrogen, and methane (Wei, 2016). In comparison with biological pretreatment methods aimed to improve biogas production from lignocellulosic materials, the bioaugmentation technique possesses certain advantages, including the requirement of less time, lower costs, less dry matter loss, and toxicity delimiting (Wei, 2016; Town and Dumonceaux, 2016). According to recent studies, the bioaugmentation technique was confirmed to accelerate acidification, further improving biogas production from lignocellulosic materials (Yang et al., 2016; Weiss et al., 2016).

The effects of pretreatment using different microbial consortium on the biogasification efficiency of lignocellulosic materials was studied previously (Wen et al., 2015), as well as the effects of different bioaugmentation patterns on biogas production (Martin-Ryals et al., 2015; Yang et al., 2016). However, there exist few studies regarding the comparative effects of pretreatment with either microbial consortium or bioaugmentation using lignocellulolytic microbes on the production of biogas from lignocellulosic biomass. In this study, we aim to understand which method performs better. The results obtained from this study are beneficial as they can be used to screen and optimize treatment methods for the efficient degradation of lignocellulose. In addition, these studies will provide further insight into resolving the technical bottleneck of the straw biogas project in China.

## 2 Materials and methods

### 2.1 Experiment materials

Corn straw was collected from farmland in a suburb of Chengdu, China. The collected straw was air-dried and shredded into 5 mm pieces. Digested sludge obtained from a pig farm was used as inoculum. Feedstock and inoculum characteristics are presented in Table 1.

**Table 1.** Characteristics of corn straw and digested sludge

	TS (%)	VS (%)	C (%)	N (%)
Corn straw	87.91±0.11	78.81±0.04	36.59±0.04	0.73±0.02
Digested sludge	2.92±0.05	1.68±0.05	N.D.	N.D.

Note: N.D. None determination

Aerobic microbial consortium for pretreatment (AMC) : Constructed with the experiment including the Congo red screening, cellulase activity, and antagonism determination in sequence. It was comprised of *Paenibacillus cucumis* (1 strain, derived from bamboo insect), *Bacillus altitudinis* (2 strains, derived from rumen fluid), *Bacillus subtilis* (3 strains, derived from soil), and *Lysinibacillus halotolerans* (1 strain, derived from rumen fluid).

Anaerobic microbial consortium for bioaugmentation (ANMC): Stable, derived from bamboo insect, and enriched to 21 generations via successive generations.

*Clostridium sp.* was the dominate microorganism in ANMC.

Culture medium :  $\text{KH}_2\text{PO}_4$  1.0 g, NaCl 0.1 g,  $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$  0.3 g,  $\text{NaNO}_3$  2.5 g,  $\text{FeCl}_3$  0.01 g,  $\text{CaCl}_2$  0.1 g,  $\text{H}_2\text{O}$  1 L, and  $0.5 \text{ g} \cdot \text{L}^{-1}$  cellulosic materials.

### 2.2 Pretreatment of corn straw

5 g corn straw and 10 mL AMC liquid (10% inoculation) were mixed with 100 mL medium in a 250 mL shake flask. The flask was then incubated at 30 °C with shaking at 160 rpm for 3 d. This was defined straw pretreatment solution, which can be used for following anaerobic digestion of AMC group directly. Additional samples were then dried and utilized for lignocellulose content determination and scanning electron microscope analysis.

### 2.3 Anaerobic digestion

Batch anaerobic digestion of pretreated corn straw was carried out as follows. The ratio of straw to digested sludge used was 1: 1 based on volatile solid content. A 500 mL glass bottle with a working volume of 350 mL was utilized for this assay. A total of 3 test groups were set up as follows.

AMC: Straw pretreatment solution (5 g corn straw, 100 mL medium and 10 mL aerobic microbial consortium) was combined with 235 g digested sludge after 3 d pretreatment.

ANMC: 5 g corn straw, 100 mL medium and 10 mL anaerobic microbial consortium were directly added to 235 g digested sludge;

Control group (Ctrl): 5 g corn straw, 100 mL medium and 10 mL ultrapure water were added to 235 g digested sludge.

In addition, a blank control group (235 g digested sludge only) was also used. All reactions were carried out under mesophilic ( $35 \pm 2$ ) °C conditions using a water bath. A total of three replicates were carried out for this assay.

## 2.4 Analysis methods

### 2.4.1 Conventional physical and chemical indicators analysis

Total solids (TS) and volatile solids (VS) were both measured according to standard methods (APHA, 2012), while lignocellulose contents were measured using standard methods described by NREL in the USA (National Renewable Energy Laboratory, 2015). Carbon and nitrogen were both measured using a Vario MICRO select elemental analyzer (Elementar, Mt. Laurel, NJ, USA).

Biogas production was analysed using water displacement, while biogas composition was quantified using gas chromatography equipment (GC122, Shanghai Instrument-electric Analysis Instrument Co., Ltd., Shanghai, China) equipped with a thermal conductivity detector (TCD) (Zhu, et al. 2017). The stainless-steel

column that was used for these analyses was packed with Porapak Q. The injector, oven, and detector temperatures were set to 120, 120, and 150 °C, respectively. Nitrogen was used as the carrier gas and the flow was maintained at 30 mL·min<sup>-1</sup>.

The concentration of volatile fatty acids was analysed using a gas chromatography instrument (GC102, Shanghai Instrument-electric Analysis Instrument Co., Ltd., Shanghai, China) equipped with a flame ionization detector (FID). The injector, oven, and detector temperatures were set to 160, 210, and 230 °C, respectively. Nitrogen was used as the carrier gas, and the flow rate was maintained at 30 mL·min<sup>-1</sup>.

### 2.4.2 Enzyme activity analysis

Single strain and microbial consortium were cultured in HM medium (KH<sub>2</sub>PO<sub>4</sub> 1.0 g, NaCl 0.1 g, MgSO<sub>4</sub>·7H<sub>2</sub>O 0.3 g, NaNO<sub>3</sub> 2.5 g, FeCl<sub>3</sub> 0.01 g, CaCl<sub>2</sub> 0.1 g, CMC-Na 5 g, and H<sub>2</sub>O 1 L) at 30 °C for 3 d. Liquid samples were centrifuged at 8,000 rpm for 10 min. This centrifuged sample was used as crude enzyme liquid, and its activity was measured according to standard methods (DNS) (Oppert et al., 2010; Shi et al., 2011). Carboxymethyl cellulase enzyme activity (CMCase), cellobiase, and filter paper enzyme (FPase) were also analyzed in this study. The filter paper (Whatman1, 1 cm×6 cm), sodium carboxymethylcellulose (1%), and salicin (2%) were used as substrates for FPase, CMCase and cellobiase analysis, respectively. The enzyme activity was determined according to the reducing sugar (glucose) concentration that was generated from the enzyme catalysis of enzyme protein in unit time (Shi et al., 2011).

### 2.4.3 Scanning electron microscope analysis

Straw samples prior to and following pretreatment were utilized for scanning electron microscopy (HITACHI TM-1000, Japan) analysis.

### 2.5 16S rDNA analysis

Sludge samples were collected from both treated and untreated digesters following a 40-d anaerobic digestion. These samples were stored in an ultra-low temperature freezer at -80 °C for future DNA extraction and subsequent microbial community structure analysis. These analyses were completed by a Sequencing company.

## 3 Results and discussion

### 3.1. Lignocellulose degradation rate of straw

The lignocellulose degradation rate is one indicator which represents the biodegradability of straw biomass following pretreatment. Both the lignocellulose contents and the degradation rate of corn straw pretreated with AMC are shown in Table 2. The cellulose, hemicellulose, and lignin content of corn straw that was pretreated for 3

d using AMC were 0.25, 0.23 and 0.14 g·g<sup>-1</sup>, respectively. These levels were comparatively reduced compared to the control by 16.7%, 17.9%, and 12.5%, respectively. These results demonstrated that AMC can affect degrading cellulose. According to these results, we found that hemicellulose was degraded faster in comparison to cellulose. This was due to the fact that the primary composition of hemicellulose was carbohydrates, which are easy to degrade. These included xylan, glucuronoxylan, arabinoxylan, glucomannan, and xyloglucan, which have increased variability in structure and composition compared to cellulose, and function to maintain a comparatively higher degradation rate during the pretreatment process (Van Dyk and Pletschke, 2012). Therefore, in contrast to cellulose, hemicellulose was shown to be relatively easy to hydrolyze, with the monomeric sugars and acetic acid produced able to be subjected to bioconversion for the production of biogas and other useful byproducts (Nanda et al., 2014). Cellulose is a polymer that consists of glucose units connected by β-1-4 glycosidic bonds (Li et al., 2014) and is wrapped by lignin, making it more difficult to hydrolyze. Lignin is a complex polyphenyl aromatic compound that linked via ester bonds. It tightly binds cellulose and hemicellulose to form plant primary and secondary cell walls (Nanda et al., 2014). In addition, lignin is resistant to degradation and acts as an obstacle for the effective utilization of cellulose and hemicellulose (van Kuijk et al., 2015). Therefore, the aim of microbial consortium pretreatment was to destroy the lignocellulosic structure, which can assist in improving the hydrolysis process, further to promote the biogasification efficiency of lignocellulosic materials.

**Table 2.** Lignocellulose contents of corn straw before and after pretreatment by AMC

	Before pretreatment (g·g <sup>-1</sup> )	After pretreatment (g·g <sup>-1</sup> )	Degradation rate (%)
Cellulose	0.30±0.80	0.25±0.95	16.7
Hemicellulose	0.28±0.25	0.23±0.29	17.9
Lignin	0.16±0.26	0.14±0.03	12.5

### 3.2 Cellulase activity


Cellulose degradation is a complex biological process and is accomplished with the synergistic effects of various cellulases. Therefore, we analyzed the activity of three common cellulases, including FPase, CMCase, and Cellobiase (Xu et al., 2018) in this study. As depicted in Table 3, the FPase, CMCase, and Cellobiase activity levels were determined to be 0.33 U·mL<sup>-1</sup>, 1.69 U·mL<sup>-1</sup> and 0.013 U·mL<sup>-1</sup>, respectively, all of which were beyond the superior limit of a single strain. This result agrees with the conclusion that lignocellulose degradability of microbial consortium is much greater than that of a single strain (Wang et al., 2011a).

**Table 3.** Cellulase activity of single strain and microbial consortium AMC

	Single strain (U·mL <sup>-1</sup> )	AMC (U·mL <sup>-1</sup> )
FPase	0.05~0.17	0.33
CMCase	0.3~0.8	1.69
Cellobiase	0~0.01	0.013

### 3.3 Scanning electron microscope analysis


The apparent morphological structural changes of corn straw prior to and following microbial consortium AMC pretreatment are depicted in Fig. 1. Obvious structural destruction was observed, which was accompanied by a larger specific surface area in pretreated straw. The untreated straw surface was observed to be regular and smooth (Fig. 1a), while the pretreated straw surface was observed to be rough and fragmented (Fig. 1b). This was due to the fact that various cellulases which were secreted from microbial consortium AMC exerted synergistic effects on the destruction of the lignocellulosic structure, which benefited the efficient degradation of lignocellulose and its subsequent hydrolysis and fermentation (Zhong et al., 2016).

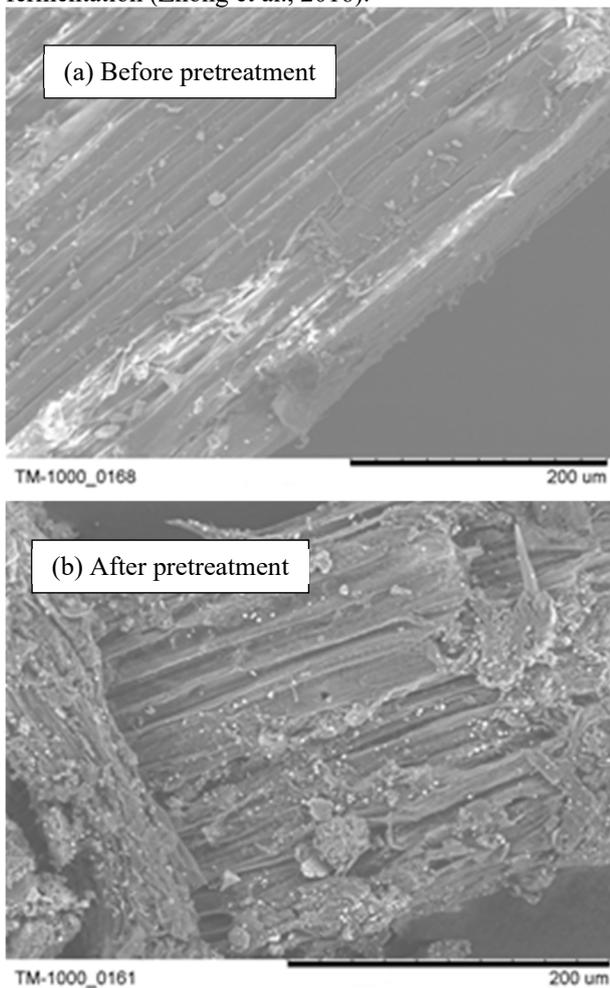


**Fig.1** Electric microscope scanning graph of untreated and pretreated corn straw ( $\times 500$  times)

### 3.4 Performance of anaerobic digestion

Biomethane production is a key indicator for the evaluation of biomass energy conversion and biogasification efficiency (Hu et al., 2015). We studied the cumulative amount of methane generated from untreated and pretreated corn straw (Fig. 2) in order to understand the differences between the effect of pretreatment with AMC versus bioaugmentation with ANMC on corn straw biogas production. According to the results from this study, the cumulative amounts of methane that was generated from ANMC and AMC were 242.56 mL·g<sup>-1</sup> VS and 233.09 mL·g<sup>-1</sup> VS, which was increased with respect to the control by 11.23% and 6.89%, respectively. In general, ANMC was observed to perform better than AMC. This could be due to the fact that AMC pretreatment promoted the process of straw hydrolysis to saccharification, but meanwhile consumed some carbohydrates in order to meet the demands of its growth. Therefore, there were less carbohydrates remaining to be used for subsequent anaerobic digestion, further offsetting the promoting effect of AMC on the biogasification efficiency of straw. In contrast, ANMC primarily consists of *Clostridium* sp., a species that enhances bacterial and archaeal diversity and quantities, and further promotes the hydrolysis and biogas production of lignocellulosic materials (Aydin, 2016). Therefore, when the previous advantages of bioaugmentation over pretreatment methods are taken into consideration, we found that bioaugmentation with ANMC was better choice for promoting biomethane production of corn straw, compared with pretreatment using AMC.

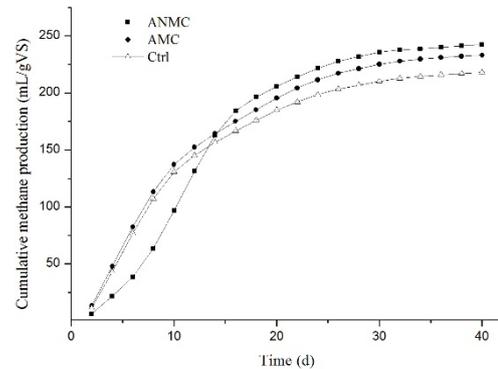


**Fig.2** Changes of cumulative methane production during anaerobic digestion of corn straw

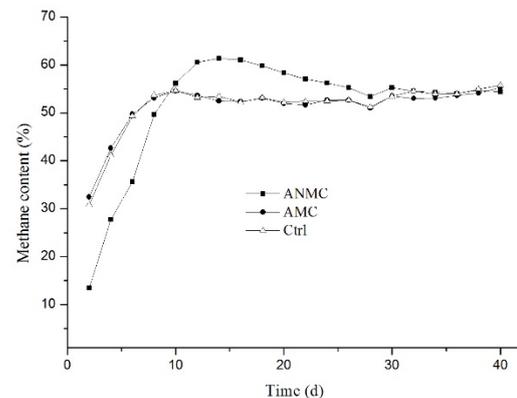

**Fig.3** Changes of methane content during anaerobic digestion of corn straw

In this study, we also analysed methane content (Fig. 3). Changes in methane content of AMC were found to be similar to control samples, which were found to gradually increase to approximately 50%, where they remained stable following 10 d. In regard to ANMC, we determined that its methane content was less than that of AMC and control samples at the initial stage, but exceeded control levels up to 61.4% following 10 d, followed by a gradual decrease where it remained stable at approximately 54%. These results demonstrated that bioaugmenting ANMC could function to improve corn straw methane content during the anaerobic digestion process.

Volatile fatty acids (VFAs) represent important indicators for the evaluation of the balance of both hydrolytic acidification and methane production (Wang et al., 2009). VFAs (acetic acid, propionic acid, and butyrate acid) generated from both untreated and pretreated corn straw are depicted in Fig. 4. Throughout the process, from the start to 16 d, the VFAs concentration of ANMC was observed to be remarkably higher compared to that of AMC and control samples. This is likely due to the fact that *Clostridium* sp. from ANMC resulted in the production of short chain volatile substances during the metabolic process. The peak value was observed to appear at 6 d, which was increased to 2169.4 mg·L<sup>-1</sup>. It has been previously demonstrated that VFAs have only a little effect on anaerobic digestion when it is at a concentration of less than 4125 mg·L<sup>-1</sup> (Wang et al., 2011b). In addition, these were found to produce short chain volatile acids, including acetic acid and butyric acid, which were beneficial for the subsequent methanogenesis process (Yuan et al., 2016). That explains why the cumulative methane production of ANMC was observed to be the greatest among the three test groups, even though its VFA concentration was still the highest.

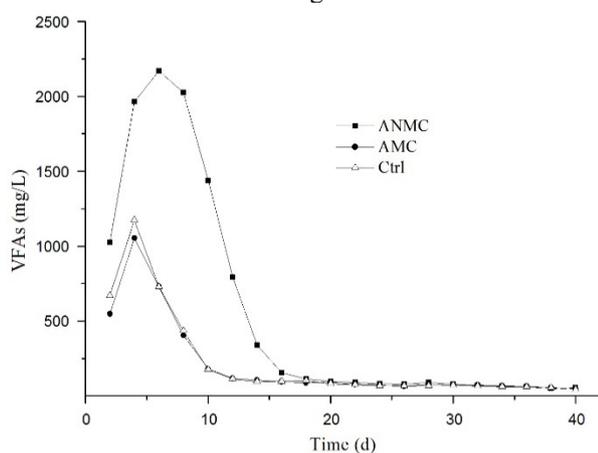

**Fig.4** Changes of VFAs concentration during anaerobic digestion of corn straw

In general, both pretreatment with AMC and bioaugmentation with ANMC were found to have a promoting effect on the biogasification efficiency of corn straw, however, these effects were still limited in comparison to other related studies (Zhong et al., 2011; Zhang et al., 2015). For example, the total biogas and methane production generated from straw that had been pretreated with microbial consortium for 15 d was found

to be increased by 33.1% and 75.6%, respectively (Zhong et al., 2011). According to the study by Zhang et al., bioaugmentation using *Acetobacteroides hydrogenigenes* was found to increase cellulose and hemicellulose removal rates and improve methane yield by 19-23% throughout the anaerobic digestion process of corn straw (Zhang et al., 2015). However, no matter whether pretreatment or bioaugmentation was utilized, the total biogas and methane production in this study was found to increase only by 13.02% and 11.23%. This could be attributed to the pretreatment time used in this study (only 3 days), which failed to efficiently degrade lignocellulosic materials into soluble substrate, compared with other studies used much longer times (Hua et al., 2016; Yuan et al., 2016; Zhong et al., 2011). An alternative reason could be related to the fact that the parameters used for this test were not optimized, which could have inhibited the efficient operation of anaerobic digestion. In addition, these results also indicated that the promoting effect of microbial consortium that was generated in this study was limited and requires further optimization. Fortunately, the comparative results regarding the effects of pretreatment with microbial consortium and bioaugmenting the lignocellulosic biomass could provide novel insights related to the screening and optimization of an efficient treatment method for the degradation of lignocellulose.

### 3.5 Microbiological Community structure analysis

We studied the microbiological community structure to understand differences in the type and quantity of microorganisms that exist between pretreatment and bioaugmentation methods (Fig. 5 and Fig. 6). We found that with both bacterium and archaeas, the microbial community compositions at the phylum level were similar in AMC and ANMC. In general, bacterium was found to be primarily comprised of Firmicutes and Bacteroidetes, while Euryarchaeota and Crenarchaeota were mainly archaeas. The phylum of Firmicute comprises numerous hydrolytic and acidogenic bacterium, facilitating the transformation of biopolymers to organic acids (Stolze et al. 2015). Importantly, methanosarcina was found to be the dominant microorganism in both AMC and ANMC, which suggests that it plays a leading role in the production of biogas from corn straw treated with AMC and ANMC. We found that methanosarcina accounted for 8% in ANMC, while only 7% in AMC. These results agree with previous results showing that ANMC performed better than AMC regarding the enhancement of biogas production.

It is important to note that we observed an altered microbiological community structure in ANMC. Therefore, this suggests that the introduced strains were undetectable in the microbial community at the completion of anaerobic digestion, as similarly described by Cater et al. (Cater et al., 2015). The observed changes in the microbial community could be due to competition for substrate and/or specific ecological niches between bioaugmented microorganism and indigenous



- biogasification of corn stover through biological pretreatment by liquid fraction of digestate (LFD). *Bioresour. Technol.* 175: 167-173 (2015)
9. B.B. Hua, J.L. Dai, B. Liu, H. Zhang, X.F. Yuan, X.F. Wang, Z.J. Cui. Pretreatment of non-sterile, rotted silage maize straw by the microbial community MC1 increases biogas production. *Bioresour. Technol.* 216: 699-705 (2016)
  10. Q.X. Li, W.T. Ng, J.C. Wu. Isolation, characterization and application of a cellulose-degrading strain *Neurospora crassa* S1 from oil palm empty fruit bunch. *Microb. Cell. Fact.* 13: 157-165 (2014)
  11. J. Lizasoain, M. Rincon, F. Theuretzbacher, R. Enguidanos, P.J. Nielsen, A. Potthast, T. Zweckmair, A. Gronauer, A. Bauer. Biogas production from reed biomass: Effect of pretreatment using different steam explosion conditions. *Biomass Bioenerg.* 95: 84-91 (2016)
  12. A. Martin-Ryals, L. Schideman, P. Li, H. Wilkinson, R. Wagner. Improving anaerobic digestion of a cellulosic waste via routine bioaugmentation with cellulolytic microorganisms. *Bioresour. Technol.* 189: 62-70 (2015)
  13. A.M. Mustafa, T.G. Poulsen, K.C. Sheng. Fungal pretreatment of rice straw with *Pleurotus ostreatus* and *Trichoderma reesei* to enhance methane production under solid-state anaerobic digestion. *Appl. Energy* 180: 661-671 (2016)
  14. S. Nanda, J. Mohammad, S.N. Reddy, J.A. Kozinski, A.K. Dalai. Pathways of lignocellulosic biomass conversion to renewable fuels. *Biomass Convers. Biorefin.* 4: 157-191 (2014)
  15. National Renewable Energy Laboratory, Inc. Standard procedures for biomass compositional analysis [EB/OL]. [2015-7-11]. [http://www.nrel.gov/biomass/analytical\\_procedures.html](http://www.nrel.gov/biomass/analytical_procedures.html).
  16. C. Oppert, W.E. Klingeman, J.D. Willis, B. Oppert, J.L. Jurat-Fuentes. Prospecting for cellulolytic activity in insect digestive fluids. *Comp. Biochem. Physiol. B-Biochem. Mol. Biol.* 155: 145-154 (2010)
  17. K. Poszytek, M. Clezkowska, A. Sklodowska, L. Drewniak. Microbial Consortium with High Cellulolytic Activity (MCHCA) for Enhanced Biogas Production. *Front. Microbiol.* 7: 1-11 (2016)
  18. E. Rouches, I. Herpoël-Gimbert, J.P. Steyer, H. Carrere. Improvement of anaerobic degradation by white-rot fungi pretreatment of lignocellulosic biomass: A review. *Renew. Sust. Energ. Rev.* 59: 179-198 (2016)
  19. W. Shi, S.Y. Ding, J.S. Yuan. Comparison of insect gut cellulase and xylanase activity across different insect species with distinct food sources. *BioEnergy Res.* 4(1): 1-10 (2011)
  20. Y. Stolze, M. Zakrzewski, I. Maus, F. Eikmeyer, S. Jaenicke, N. Rottmann, C. Siebner, A. Pühler, A. Schlüter. Comparative metagenomics of biogas-producing microbial communities from production-scale biogas plants operating under wet or dry fermentation conditions. *Biotechnol. Biofuels* 8: 14 (2015)
  21. J.R. Town, T.J. Dumonceaux. Laboratory-scale bioaugmentation relieves acetate accumulation and stimulates methane production in stalled anaerobic digesters. *Appl. Microbiol. Biotechnol.* 100: 1009-1017 (2016)
  22. J.S. van Dyk, B.I. Pletschke. A review of lignocellulose bioconversion using enzymatic hydrolysis and synergistic cooperation between enzymes—factors affecting enzymes, conversion and synergy. *Biotechnol. Adv.* 30: 1458-1480 (2012)
  23. S.J. van Kuijk, A.S. Sonnenberg, J.J. Baars, W.H. Hendriks, J.W. Cone. Fungal treated lignocellulosic biomass as ruminant feed ingredient: a review. *Biotechnol. Adv.* 33: 191-202 (2015)
  24. J.A. Veen, L.S. Overbeek, J.D. Elsas. Fate and activity of microorganisms introduced into soil. *Microbiol. Mol. Biol. Rev.* 61: 121-135 (1997)
  25. W.D. Wang, L. Yan, Cui, Z.J., Y.M. Gao, Y.J. Wang, R.Y. Jing. Characterization of a microbial consortium capable of degrading lignocellulose. *Bioresour. Technol.* 102(19): 9321-9324 (2011a)
  26. X.J. Wang, G.H. Yang, Y.Z. Feng, G.X. Ren, X.H. Han, Z.L. Song. Anaerobic co-digestion effects of manure and straw and analysis of influencing factors. *Agro-Environment Sci.* 30(12): 2594-2601 (2011b)
  27. Y.Y. Wang, Y.L. Zhang, J.B. Wang, L. Meng. Effects of volatile fatty acid concentrations on methane yield and methanogenic bacteria. *Biomass Bioenerg.* 33: 848-853 (2009)
  28. S. Weiss, W. Somitsch, I. Klymiuk, S. Trajanoski, G.M. Guebitz. Comparison of biogas sludge and raw crop material as source of hydrolytic cultures for anaerobic digestion. *Bioresour. Technol.* 207: 244-251 (2016)
  29. Wei, S.Z. The application of biotechnology on the enhancing of biogas production from lignocellulosic waste. *Appl. Microbiol. Biotechnol.* 100(23): 9821-9836 (2016)
  30. B.T. Wen, X.F. Yuan, Y.Z. Cao, Y. Liu, X.F. Wang, Z.J. Cui. Optimization of liquid fermentation of microbial consortium WSD-5 followed by saccharification and acidification of wheat straw. *Bioresour. Technol.* 118: 141-149 (2012)
  31. B.T. Wen, X.F. Yuan, Q.X. Li, J.J. Liu, J.W. Ren, Wang, X.F., Cui, Z.J. Comparison and evaluation of concurrent saccharification and anaerobic digestion of Napier grass after pretreatment by three microbial consortia. *Bioresour. Technol.* 175: 102-111 (2015)
  32. X.Q. Xu, M.M. Lin, Q. Zang, S. Shi. Solid state bioconversion of lignocellulosic residues by *Inonotus obliquus* for production of cellulolytic enzymes and saccharification. *Bioresour. Technol.* 247: 88-95 (2018)

33. Z. Yang, R. Guo, X. Xu, L. Wang, M. Dai. Enhanced methane production via repeated batch bioaugmentation pattern of enriched microbial consortia. *Bioresour. Technol.* 216: 471–477 (2016)
34. L. Yan, Y.M. Gao, Y.J. Wang, Q. Liu, Z.Y. Sun, B.R. Fu, X. Wen, Z.J. Cui, W.D. Wang. Diversity of a mesophilic lignocellulolytic microbial consortium which is useful for enhancement of biogas production. *Bioresour. Technol.* 111: 49-54 (2012)
35. X.F. Yuan, L. Ma, B.T. Wen, D.Y. Zhou, M. Kuang, W.H. Yang, Z.J. Cui. Enhancing anaerobic digestion of cotton stalk by pretreatment with a microbial consortium (MC1). *Bioresour. Technol.* 207: 293-301 (2016)
36. D.D. Zhang, Y. Wang, D. Zheng, P. Guo, W. Cheng, Z.J. Cui. New combination of xylanolytic bacteria isolated from the lignocellulose degradation microbial consortium XDC-2 with enhanced xylanase activity. *Bioresour. Technol.* 221: 686-690 (2016)
37. J. Zhang, R.B. Guo, Y.L. Qiu, J.T. Qiao, X.Z. Yuan, X.S. Shi, C.S. Wang. Bioaugmentation with an acetate-type fermentation bacterium *Acetobacteroides hydrogenigenes* improves methane production from corn straw. *Bioresour Technol.* 179: 306–313 (2015)
38. Y. Zheng, J. Zhao, F.Q. Xu, Y.B. Li. Pretreatment of lignocellulosic biomass for enhanced biogas production. *Prog. Energy Combust. Sci.* 42: 35-53 (2014)
39. C. Zhong, C.M. Wang, X.F. Wang, H.H. Jia, P. Wei, Y. Zhao. Enhanced biogas production from wheat straw with the application of synergistic microbial consortium pretreatment. *RSC Adv.* 6(65): 60187-60195 (2016)
40. W.Z. Zhong, Z.Z. Zhang, Y.J. Luo, S.S. Sun, W. Qiao, M. Xiao. Effect of biological pretreatments in enhancing corn straw biogas production. *Bioresour. Technol.* 102: 11177-11182 (2011)
41. Q.L. Zhu, L.C. Dai, B. Wu, F.R. Tan, W.G. Wang, X.Y. Tang, Y.W. Wang, M.X. He, G.Q. Hu. Integrated methane and ethanol production from livestock manure and soybean straw. *BioResources* 12(2): 2284-2295 (2017)