

Thermal and mechanical analysis of the internal support for LNG cryogenic road tanker

Filip Lisowski^{1,*}, and Edward Lisowski²

¹Cracow University of Technology, Institute of Machine Design, al. Jana Pawła II 37, 31-864 Cracow, Poland

²Cracow University of Technology, Institute of Applied Informatics, al. Jana Pawła II 37, 31-864 Cracow, Poland

Abstract. Road tankers for liquefied natural gas are designed as double-walled vacuum insulated tanks. The temperature difference between the fluid in the inner vessel and the environmental temperature can reach up to 200 K. Supports holding the internal vessel must be able to transfer complex mechanical loads occurring under operating conditions and at the same time minimize the heat leakage to the tank. In this paper the construction of a steel support with a composite insert for a 25 m³ tank was considered. The proposed design was tested in thermal and mechanical finite element analysis using ANSYS software.

1 Introduction

The demand for natural gas has been growing in recent years. This is mainly due to sustainable development and energy security. Comparing to oil and coal, natural gas is the cleanest fossil fuel. Emissions of sulfur, nitrogen oxide and carbon dioxide from the combustion of natural gas are much lower than those for oil and coal. Natural gas can be transported by pipelines or liquefied as LNG using gas carriers or special cryogenic tanks [1]. Small and medium-sized stationary tanks as well as transport containers and road tankers are designed as double-walled cryogenic tanks with vacuum insulation system. In previous publications, several authors focused on the design of LNG mobile tanks. In the paper [2] various materials on internal supports for mobile cryogenic container were considered. The numerical results of heat flux and temperature distribution for materials of low thermal conductivity like PTFE, textolite, polycarbonate or polyamide were compared.

In the paper [3] the results of study on using polyamide supports were discussed. The main goal of the paper was to experimentally determine the temperature distribution over time inside the polyamide supporting blocks under the constant pressure load. In the article [4] different types of LNG containers and referred problems of thermal analysis were discussed. In the paper [5] the design and thermal analysis of multilayered internal support were presented. The temperature distribution and average heat flux were determined for various number and dimension of steel layers under constant pressure. In the study the phenomenon of thermal contact resistance was taken into account. The papers [6-7] presents the results of numerical studies on thermal insulation systems for LNG road tankers. The authors of paper [8] presented the methodology of fatigue life calculations of LNG tank dedicated for carrier ship application. The

calculations considered large range of loads and resulted in determining ship accelerations.

In this paper we propose the design of internal support consisted of stainless steel brackets and composite insert. The application in 25m³ double-walled LNG road tanker was considered.

2 Internal support design

The design of the internal supports should provide high mechanical strength and in the same time low heat leakage to the tank. The condition of mechanical strength results in the largest possible cross-section of the support. On the other hand, a long heat transfer path and the small cross-section of the support are advantageous for a small thermal leakage. In addition, internal supports are located in the narrow annular space between the inner vessel and the outer jacket. The design of the inner supports must meet all of the above criteria. This can be achieved through a suitable geometric concept or by the use of low thermal conductivity materials. Double-walled tanks of road tankers have usually such an internal support system as at least two supports are fixed and the others are sliding. Fixed supports are intended to keep the inner tank constant in relation to the outer jacket and to limit longitudinal displacements. The sliding supports, on the other hand, are intended to allow a thermal shrinkage but at the same time to block radial displacements.

Accepting the design loads for mobile tank, the following static loads must be taken into account in accordance with the EN 13530-2:2002 standard [9]:

- (1) In the direction of travel: twice the total mass.
- (2) Perpendicular to the direction of travel: total mass.
- (3) Vertically upwards: total mass.
- (4) Vertically downwards: twice the total mass.

* Corresponding author: [filip.lisowski@mech.pk.edu.pl](mailto:filiplisowski@mech.pk.edu.pl)

In the following study the fixed support of the 25m³ tank was considered. The concept of the support design included a cylindrical joint consisted of stainless steel brackets and the insulating insert made of Durolight S2® composite is shown in the Fig. 1.

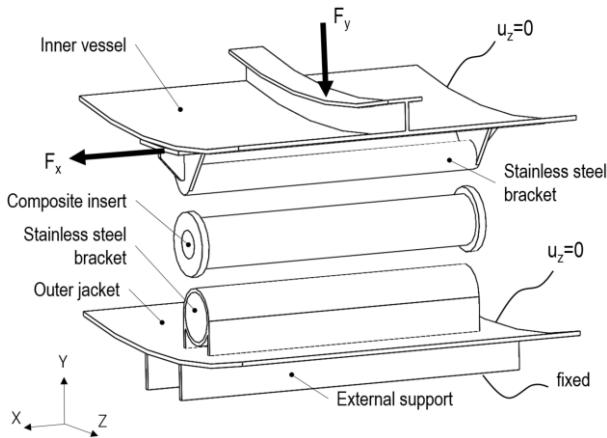


Fig. 1. Boundary conditions and loads for mechanical analysis ($u_z=0$ – around all edges)

2 Material data

It was assumed that the inner tank, the outer jacket, steel brackets of the internal support and the external support are made of stainless steel 1.4311 with mechanical properties summarized in the table 1 and thermal conductivity shown in the Fig. 2. Mechanical and thermal properties of composite material Durolight S2® are summarized in the table 2.

Table 1. Mechanical Properties of Stainless Steel 1.4311

Properties of stainless steel 1.4311	Value
Yield strength	270 MPa
Modulus of elasticity	210 GPa
Poisson ratio	0,28

Table 2. Mechanical Properties of Durolight S2®

Properties	Value
Flexural strength \perp	350 MPa
Modulus of elasticity in flexion \perp	18000 MPa
Compressive strength \perp	450 MPa
Tensile strength \parallel	180 MPa
Thermal conductivity	0,3 W/mK
\parallel - parallel to the lamination	X direction
\perp - perpendicular to the lamination	Y direction

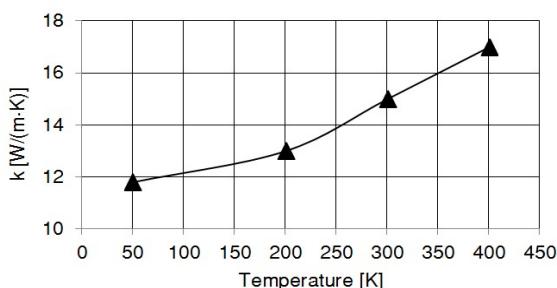


Fig. 2 Thermal conductivity of steel 1.4311 [10]

3 Finite element analysis

The analysis considered 500 x 500 mm section of the tank with dimensions given in table 3. Static mechanical analysis and transient thermal analysis were carried out separately. 4-node shell elements were accepted for steel elements and 20-node solid elements for the composite insert. The converged mesh obtained for mechanical and thermal analysis is shown in the Fig. 3 and Fig. 4.

3.1 Assumptions for mechanical analysis:

- The model is fixed and loaded as shown in the Fig. 1
- Values of loads $F_x=105$ kN and $F_y=26$ kN are accepted in accordance with the standard [9], assuming density of LNG equal to 450 kg/m³.
- The tank has four bottom supports located symmetrically to the longitudinal axis of the vehicle and two of them are fixed.
- $u_z=0$, under the assumption, that all loads in Z direction are transferred by side supports that are not considered in current analysis.
- A frictional contact with a friction coefficient of 0,1 was defined between the insert and brackets

3.2 Assumptions for thermal analysis:

- The model is in a state of thermal equilibrium, which is obtained after 24 hours.
- The initial temperature in analysis is 20 °C.
- The temperature of internal tank is -160°C
- The external surface of tank jacket exchanges heat with environment by convection with accepted convection coefficient 8,89 W/(m²K) at 20 °C [5],
- Heat is transferred through the internal support only by the conduction.
- Thermal contact resistance is omitted due to the high pressure acting on the support.

Table 3. Dimensions of the 25m³ LNG tank and the support

Dimension name	Value
Outer diameter of the inner tank	2200 mm
Outer diameter of the outer jacket	2412 mm
Wall thickness of the inner tank	6 mm
Wall thickness of the outer jacket	6 mm
Width of the internal support	200 mm
Length of the internal support	500 mm

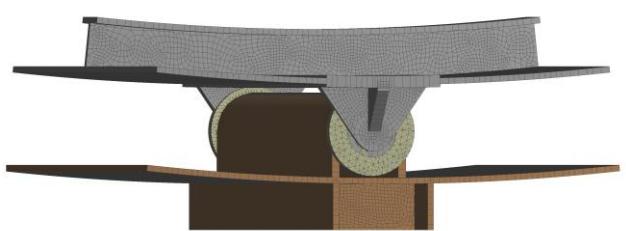


Fig. 3. Mesh for mechanical analysis

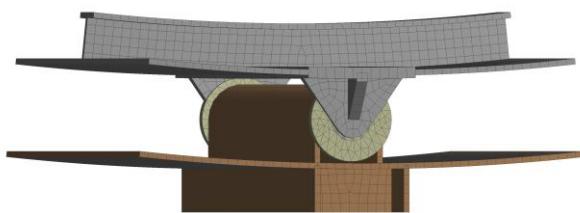


Fig. 4. Mesh for thermal analysis

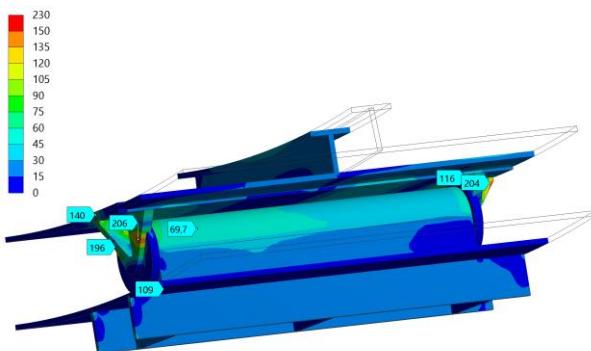


Fig. 4. Von Mises equivalent stress
 $\sigma_{\max} = 206$ MPa (for stainless steel elements)

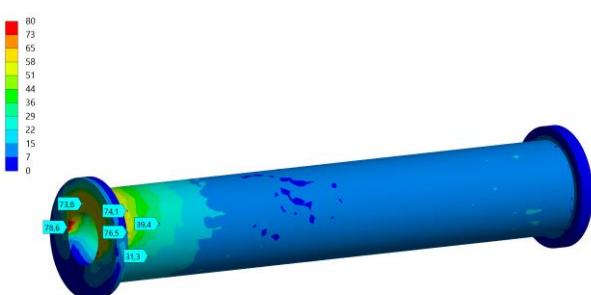


Fig. 5. Von Mises equivalent stress
 $\sigma_{\max} = 79$ MPa composite insert

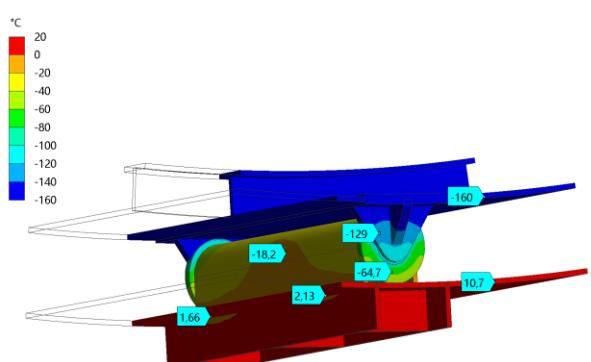


Fig. 6. Temperature distribution

3.3 Results of mechanical analysis

Results of the static mechanical analysis are presented as distributions of von Mises equivalent stress. Fig.4 presents the result for the whole analyzed structure, while Fig.5 presents the results for composite insert.

Maximum Von Mises equivalent stress within steel elements is equal to 206 MPa and is below the yield strength. For the composite insert, the maximum reduced stress is equal to 79 MPa and occurs on the edge of the inner hole. The region with stress concentration is under the tensile stress in Y direction, which in line with the previous assumption (table 2) is perpendicular to the composite lamination. The calculated tensile stress is therefore less than the permissible value. In the area of stress concentration on the outer cylindrical surface, the composite insert is compressed and bent. However, the peak stresses in this area are also less than the allowable compression and bending stresses for the accepted material.

3.4 Results of thermal analysis

As a result of transient thermal analysis the distributions of temperature shown in the Fig. 6 was obtained. It can be noticed that the temperature at the tank jacket is above zero. This is advantageous because the frost will not accumulate on the tank surface. The heat leakage through the internal support equal 36 W was also determined for the design under analysis.

4 Summary

The concept of internal support for application in 25m³ LNG double-walled road tanker was proposed. The support consisted of steel brackets and composite insert. Due to the way the elements are connected, the support is a cylindrical joint. Such a joint may be beneficial in order to compensate displacements caused by the thermal shrinkage and the mass of liquid.

Proposed design of the support was tested by applying thermal and mechanical finite element analysis. In the continuing research, other support concepts will be proposed and compared with current results.

References

1. W. Ikealumba, , and Wu, H, (2014), Some recent advances in liquefied natural gas (LNG) production, spill, dispersion, and safety, Energy Fuels, 28, pp.3556-3586.
 2. Lisowski, E, Czyżycki, W, and Łazarczyk, K, (2010), Simulation and experimental research of internal supports in mobile cryogenic tanks, Technical Transactions , Mechanics, 2-M, pp.175-184.
 3. Lisowski E, Czyżycki, W, and Łazarczyk, K, (2010), Using of polyamide in construction of supporting blocks of cryogenic tanks on example of LNG container, Archives of Foundry Engineering, vol.10, Special Issue 3/2010.
 4. Lisowski, E, and Czyżycki, W, Transport and storage of LNG in container tanks, (2011), Journal of KONES Powertrain and Transport, vol.18, No.3, pp.193-201.

5. Czyżycki, W, (2015), Modeling of heat flow through multilayer internal supports of cryogenic vessels, Technical Transactions, Mechanics, 2-M, pp.27-34.
6. Lisowski, E, and Lisowski, F, (2019), Influence of vacuum level on insulation thermal performance for LNG cryogenic road tankers, MATEC Web of Conferences 240, 01019, ICCHMT 2018, <https://doi.org/10.1051/matecconf/20182400101>
7. Lisowski, E, and Lisowski, F, (2019), Study on Thermal Insulation of liquefied natural gas cryogenic road tanker, Thermal Science, Vol. 23, Suppl. 4, pp.S1381-S13911.
8. Skrzypacz, J, and Jaszak, P, (2018), Selected aspects of cryogenic tank fatigue calculations for offshore application, Int. J. of Applied Mechanics and Engineering, vol. 23, No.1, pp.251-259, DOI: 10.1515/ijame-2018-0015
9. EN 13530-2:2002. Cryogenic vessels – Large transportable vacuum insulated vessels.
10. Czyżycki, W, (2011), Heat flow modelling on thermal insulation of cryogenics tanks using SolidWorks Simulation package, Technical Transactions, Mechanics, 4-M, pp.29-36.