

# Cooling intake air of marine engine with water-fuel emulsion combustion by ejector chiller

Roman Radchenko<sup>1</sup>, Victoria Kornienko<sup>1</sup>, Mykola Radchenko<sup>1\*</sup>, Dariusz Mikielewicz<sup>2</sup>, Artem Andreev<sup>1</sup>, Ivan Kalinichenko<sup>1</sup>

<sup>1</sup>Admiral Makarov National University of Shipbuilding, 9 Heroes of Ukraine Avenue, Mykolayiv, Ukraine

<sup>2</sup>Gdańsk University of Technology, 11/12 Gabriela Narutowicza Street, 80-233 Gdansk, Poland

**Abstract.** The fuel efficiency of cooling air at the inlet of marine low speed diesel engine with water-fuel emulsion combustion by ejector chiller utilizing the heat of exhaust gas along the route line Mariupol–Amsterdam–Mariupol was estimated. The values of available refrigeration capacity of ejector chiller, engine intake air temperature drop and corresponding decrease in specific fuel consumption of the main diesel engine at varying climatic conditions along the route line were evaluated. Their values for water-fuel emulsion were compared with conventional fuel oil combustion.

## 1 Introduction

Low speed diesel engines are the most widespread as ship main engines [1]. The variation in ambient air temperatures along the route line influences the fuel efficiency of the engines. Thus, an increase in engine intake air temperature by 10 °C causes specific fuel consumption increase by 1.1 to 1.2 g/(kWh) [2]. In the most cases at the main engine load above 50% an exhaust gas heat utilized by the exhaust gas boiler exceeds the ship steam demand. It is reasonably to use "surplus" exhaust heat by ejector chiller (ECh) as the most simple in design [3, 4] for engine intake air cooling (EIAC) to improve fuel efficiency [5, 6].

The efficiency of water-fuel emulsion (WFE) combustion is increased compared with fuel oil combustion due to microexplosions of WFE droplets, that intensifies the processes of mixing fuel with air and combustion in the whole. With this the enhanced fragmentation of WFE droplets leads to reduction of the particle emission.

Despite the increased humidifying the surface with an increase of the water content to about 10 %, due to enhanced fragmentation of WFE droplets and entrainment of small particles by the exhaust gas flow, the intensity of their deposition decreases. Thus, the deposits can be easily removed (e.g. by washing).

## 2 Literature review

A lot of researches are devoted to enhancing the fuel efficiency of combustion engines [7, 8] by cooling cyclic air [9, 10] in waste heat recovery chillers [11]. The absorption lithium-bromide chillers (ACh) are the most widely used and provide cooling air to about 15 °C with a high coefficient of performance COP of 0.7 to

0.8. But because of large sizes the ACh units mounting in engine room is problematical. The ECh consist of heat exchangers [12] suitable for mounting in free spaces. They enables to deep cool air but with a low COP of 0.2 to 0.3 [13] and quite suitable for railway [14, 15] and marine [16, 17] applications.

The heat loss with exhaust gases represents a high part of the total waste heat in combustion engines [18, 19]. Authors [20] introduced the technique of exhaust gas heat utilization in gas cogeneration unit based on absorption heat exchange. The low-temperature economizers [21] or low-pressure economizers [22] use a condensation heat of vapors of sulfuric acid and water in exhaust gas. The condensed acid vapor glues the ash in exhaust gas, and adheres on heating surface [23], which increases the hydraulic and thermal resistance [24], affecting the reliable and economical operation. The experience of using WFE in boilers and diesel engines indicates the undeniable advantages of this type of fuel: the effective specific fuel consumption decreases by about 8 % [25], in the exhaust gases the concentration of nitrogen oxides is reduced in 1.4 to 3.1 times [26], the concentration of CO – in 1.3 to 1.5 times [27], smoke – in 1.3 to 2.4 times [28]. The influence of WFE combustion process parameters in low capacity boiler on the level of formation of nitrogen oxides, carbon monoxide and soot was studied [27]. The analysis of literary sources shows, that there is no quantitative data of low-temperature corrosion [29, 30] (LTC intensity of condensation low-temperature heating surfaces (LTHS) of EGB while WFE combustion.

A double effect is achieved with WFE combustion: enhanced fragmentation of WFE droplets due to their microexplosions intensifies the combustion processes and reduces the particle emission as result, as well as intensifies entrainment of small particles by the exhaust

\* Corresponding author: [nirad50@gmail.com](mailto:nirad50@gmail.com)

gas flow and decreases their deposition on condensing/heating economizer surfaces and their thermal resistance as result [31, 32].

The aim of the research is to develop a marine engine intake air cooling (EIAC) system with deep utilization of the exhaust gas heat potential enlarged due to using the heat of low-temperature condensation of vapors of sulfuric acid and water when WFE combustion as a novel trend in ship waste heat recovery.

The research tasks:

- to carry out the experimental research of low-temperature condensation economizer to receive the data on corrosion when WFE combustion;
- to develop a marine engine intake air cooling system with deep utilization of the exhaust gas heat when WFE combustion;
- to estimate the fuel efficiency of cooling the intake air of marine low speed diesel engine with WFE combustion by ECh compared with fuel oil combustion on the ship route line.


### 3 Research methodology

#### 3.1 Experimental research

Investigations of corrosion intensity of low-temperature condensation economizer were carried out on an experimental setup (Fig. 1, a) with fuel oil and WFE based on this fuel oil combustion [33, 34] with different water content with an almost constant excess air ratio.




a

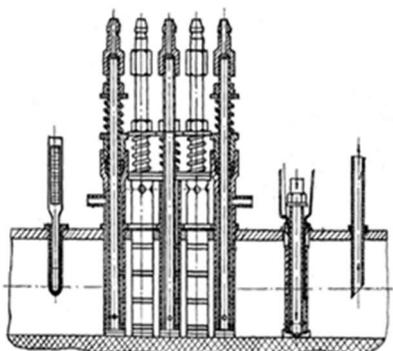


b

**Fig.1.** General view of the experimental setup (a) and tube-samples of low-temperature condensation economizer (b).

Based on experimental studies the minimum value of wall temperature is defined (Fig. 2, a), at which the permissible speed of low-temperature corrosion at a level of 0.25 mm/year and the minimum value of exhaust gas temperature at exit from EGB are ensured (Fig. 2, b). Fig. 2, b show that the smallest values of corrosion intensity are observed for large values of water content in water-fuel emulsion 30 %.

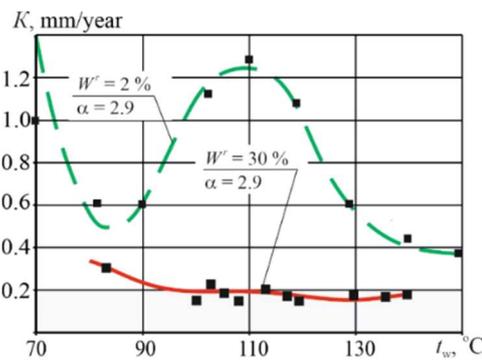

a

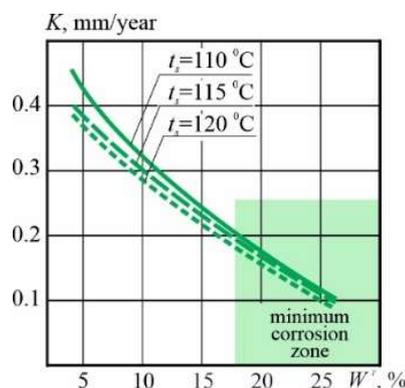

b

**Fig. 2.** Dependences of corrosion rate of low-temperature condensation economizer on the wall temperature  $K = f(t_w)$  (a) and water content  $W'$  in emulsion (b).


The range of wall temperature within 90°C down to 70°C of low-temperature condensation economizer (LTCE) safe operation is determined, which reveals the potential for deep exhaust gas heat utilization as compared with 150°C down to 130°C for conventional fuel oil combustion.

#### 3.2 Theoretical research

A schema of cooling intake ambient air at the suction of turbocharger of diesel engine by utilizing the heat of exhaust gas in evaporative and economizer section of generator is shown in Fig. 3. The ejector refrigeration machine consists of power and refrigeration contours. A generator of power contour uses a heat of exhaust gas to produce a high pressure refrigerant vapour as a motive fluid which energy is used in ejector to compress the low pressure refrigerant vapour, sucked from evaporator-intake air cooler of refrigeration contour, up to the pressure in the condenser.

As an example of transport vessel a bulk carrier with low speed diesel engine 5S60ME-C10.5-TIII as the main engine [2] is considered: nominal power  $N_n =$

12450 kW and continuous service power  $N_s = 10580$  kW. A decrease in temperature of air  $\Delta t_a$  at the engine inlet due to its cooling by ECh and, accordingly, effect from its application depends on the heat of steam produced by exhaust heat utilization steam boiler (Exh.SB), that remains after covering all the heat requirements aboard ship. During warm time steam consumption on the transport ship is approximately 25 % of steam productivity of exhaust boiler, i.e. 75 % of steam produced can be used in ECh for cooling of air at the inlet of diesel engine turbocharger.

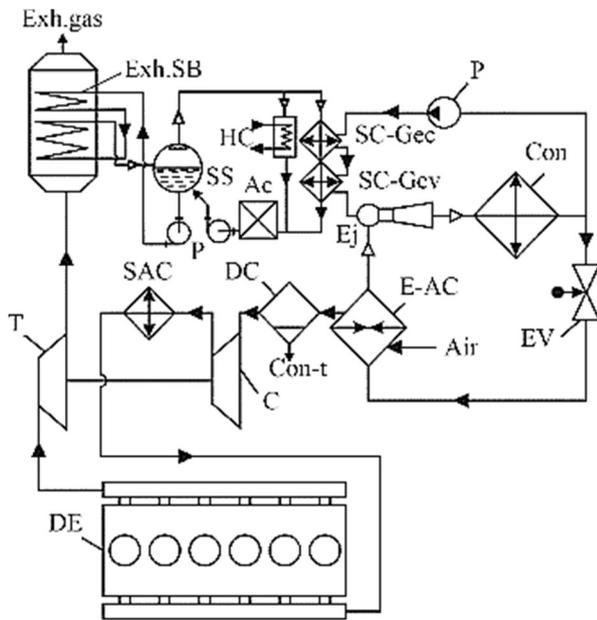

**Fig. 3.** Schema of system for cooling intake air at the suction of turbocharger by utilizing the heat of exhaust gas: DE – diesel engine; T – turbine, C – compressor of turbocharger; SAC – scavenger air cooler; Exh.SB – exhaust gas steam boiler; SC-Gev – steam condenser-evaporative section of generator; Gec – economizer section of generator; E-AC – evaporator-air cooler; Ej – ejector; Con – condenser; EV – expansion valve; P – pump; Con-t – condensate; DC – droplet catcher; Ac – accumulator of feed water; SS – steam separator; HC – heat consumer. CE – condensation economizer.

Besides, decrease in temperature of air in the air cooler at the inlet of the engine  $\Delta t_a = t_{a1} - t_{a2}$  depends on the temperature  $t_{a1}$  and relative humidity  $\phi_a$  of intake air in the engine room, in turn, depending on parameters of ambient air, i.e. sailing environmental conditions. During sailing in warm time the air temperature in the engine room  $t_{ER}$  exceeds ambient temperature by 10 °C [2].


The temperature  $t_{a2}$  which limits depth of cooling air in the air cooler, in turn, depends on the temperature of boiling refrigerant. In case of application of ECh a refrigerant R142b can be used. A temperature of boiling R142b in the evaporator-air cooler is desirable about  $t_0 = 7$  °C.

The minimum difference of temperatures between cooled air and boiling refrigerant can be accepted 8 °C. Taking into account these values a depth of cooling of air in the air cooler is limited to minimum temperature  $t_{a2} = t_0 + 8 = 15$  °C. A refrigeration capacity of ECh  $Q_0$  is defined from available exhaust gas heat  $Q_G$  as

$$Q_0 = \zeta Q_G, \text{ where } \zeta - \text{coefficient of performance of ECh} \\ \zeta = 0.30 \dots 0.35.$$

## 4 Results

A route line Mariupol-Amsterdam-Mariupol is considered. Values of temperature  $t$  and relative humidity  $\phi$  of ambient air, and also sea water temperature  $t_w$  during route were used according to the meteorocenter data, fixed each 3 hours. Values of moist content  $d_a$  following them were calculated (Fig. 4).

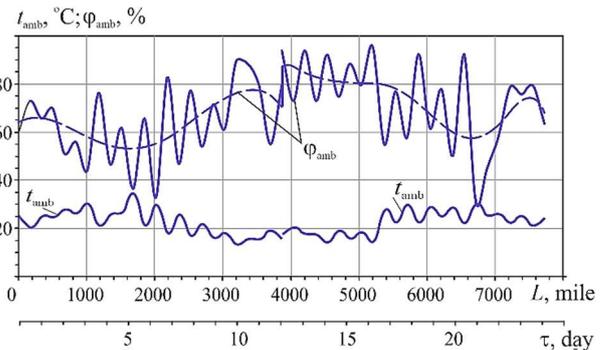


**Fig. 4.** Variation of ambient air temperature  $t_{amb}$ , relative humidity  $\phi_{amb}$  and absolute humidity  $d_a$ , on the route line Mariupol-Amsterdam-Mariupol (22.07.2019...3.08.2019).

As one can see, during summer route the temperature of ambient air  $t_{amb}$  changes from 15...20 °C in middle widths to 25...30 °C in southern widths (accordingly air temperature in engine room is 10 °C higher), and relative humidity of air  $\phi_{amb}$  – from 50...60 % in Mediterranean sea to 80...90 % at Northwest Europe.


For each time interval (3 hours) and corresponding temperature  $t_{amb}$  and relative humidity  $\phi_{amb}$  of ambient air the processes of cooling of intake air in the air cooler at the inlet of diesel engine from the air temperature at the cooler inlet (in engine room)  $t_{a1} = t_{amb} + 10$  °C to the outlet air temperature  $t_{a2}$  were calculated.

In the case of using the enlarged exhaust gas heat when WFA combustion the values of the available cooling capacity  $Q_{0WFA}$  of ECh is higher compared with  $Q_0$  for fuel oil combustion due to deeper exhaust gas heat utilization to lowered temperatures  $t_{exh2} = 90 \dots 110$  °C compared with  $t_{exh2} = 150 \dots 170$  °C (Fig. 5).

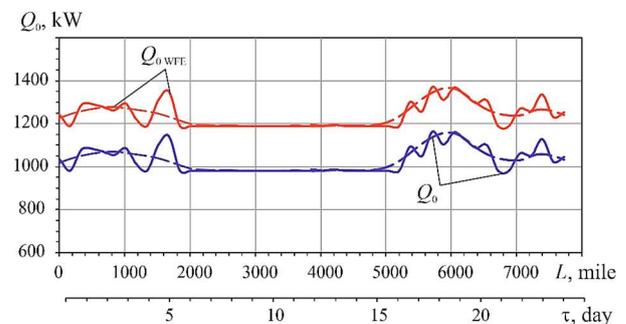

**Fig.5.** The available cooling capacities of ECh:  $Q_0$  – fuel oil;  $Q_{0WFE}$  – WFE.


Accordingly the values of air temperature drop at the engine inlet  $\Delta t_a$  when WFE combustion  $\Delta t_{aWFE}$  are higher compared with oil fuel  $\Delta t_a$  (Fig.6).

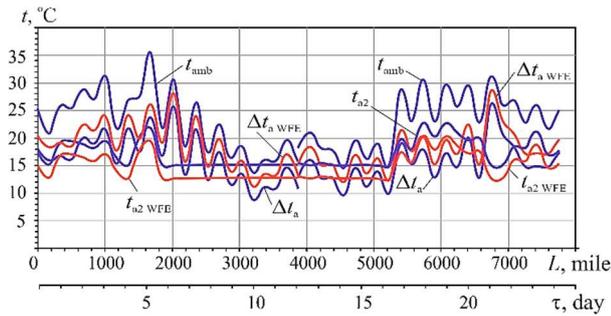

**Fig. 6.** The values of engine intake air temperature drop:  $\Delta t_a$  – fuel oil;  $\Delta t_a$  – WFE.

As it is shown, decrease in temperature of air in the air cooler of ECh, utilizing a heat of exhaust gas (schema in Fig. 3)  $\Delta t_a = 10...20$  °C when oil fuel combustion whereas  $\Delta t_a = 15...25$  °C for WFE.

Decrease in specific fuel consumption  $\Delta b_e$ , g/(kW·h), of diesel engine, saving of fuel consumption in absolute  $B_e$ , t, and relative  $B'_e$ , %, values on the route line Mariupol-Amsterdam-Mariupol due to cooling intake air by ejector refrigeration machine, using exhaust gas heat only (schema in Fig. 1), and by sea water, calculated by program "mandieselturbo" [2], are shown in Fig. 7.

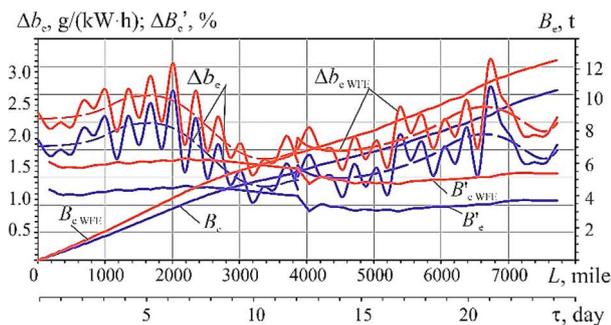

**Fig. 7.** Decrease of specific fuel consumption  $\Delta b_e$ , g/(kW·h), fuel saving in absolute  $B_e$ , t, and relative  $B'_e$ , %, values on the route line Mariupol-Amsterdam-Mariupol (22.07.2019...3.08.2019):  $\Delta b_e$ ,  $B_e$  and  $B'_e$  – oil fuel;  $\Delta b_{e\text{ WFE}}$ ,  $B_{e\text{ WFE}}$  and  $B'_{e\text{ WFE}}$  – WFE.

As one can see, a decrease of specific fuel consumption due to intake air cooling by ECh, using exhaust gas heat,  $\Delta b_e = 1.2...2.5$  g/(kW·h), absolute fuel saving  $B_e \approx 10$  t and relative fuel saving  $B'_e = 1.2...1.3$  % for oil fuel combustion, whereas  $\Delta b_e = 1.2...2.5$  g/(kW·h),  $B_{e\text{ WFE}} \approx 10$  t and  $B'_{e\text{ WFE}} = 1.2...1.3$  % for WFE combustion in diesel engine 5S60ME-C10.5-TIII on the route line Mariupol-Amsterdam-Mariupol (22.07.2019...3.08.2019).

The further reserves to increase fuel saving by about 1.5 times consist in complex engine intake and scavenge air cooling with using additional heat of scavenge air in ECh or in combined absorption-ejector chiller with ACh as a high-temperature stage to cool the air to about 15 °C and its deep subcooling to 10 °C and lower in the case of engine intake air.

## 5 Conclusions

A marine engine intake air cooling system with deep utilization of the exhaust gas heat potential enlarged due

to using the heat of low-temperature condensation of vapors of sulfuric acid and water in economizer section of ejector chiller generator when water-fuel emulsion combustion is developed as a novel trend in ship waste heat recovery.

The results of experimental research of low-temperature condensation economizer approved the appropriate corrosion rate when water-fuel emulsion combustion and good perspective for their application in ship waste heat recovery.

The application of developed diesel engine intake air cooling system provides 1.3 to 1.7 % fuel saving on the route line Mariupol-Amsterdam-Mariupol and reveals a good perspectives for increasing the fuel saving by 1.5 times due to complex engine intake and scavenge air cooling through using additional heat of scavenge air in ECh or in combined absorption-ejector chiller.

## References

1. V. Kornienko, M. Radchenko, R. Radchenko, D. Kononov, A. Andreev, M. Pyrysunko, Improving the efficiency of heat recovery circuits of cogeneration plants with combustion of water-fuel emulsions. *Thermal Science* **25 (1 Part B)**, 791-800 (2021)
2. MAN Diesel Turbo, CEAS Engine Calculations [Online], available at: <https://marine.man-es.com/two-stroke/ceas>. 2019
3. D. Butrymowicz, J. Gagan, K. Śmierciew, M. Łukaszuk, A. Dudar, A. Pawluczuk, A. Łapiński, A. Kuryłowicz, *Investigations of prototype ejection refrigeration system driven by low grade heat*, in E3S Web of Conferences **70**, 7 p. (2018)
4. D. Kononov, H. Kobalava, V. Maksymov, R. Radchenko, M. Avdeev, *Experimental research of the excessive water injection effect on resistances in the flow part of a low-flow aerothermopressor*, in Advances in Design, Simulation and Manufacturing III (DSMIE 2020). LNME, pp. 292-301 (2020)
5. M. Radchenko, D. Mikielwicz, A. Andreev, S. Vanyeyev, O. Savenkov, *Efficient ship engine cyclic air cooling by turboexpander chiller for tropical climatic conditions*, in Integrated Computer Technologies in Mechanical Engineering (ICTM 2020), LNNS, **188**, pp. 498-507 (2021)
6. A. Radchenko, E. Trushliakov, V. Tkachenko, B. Portnoi, O. Prjadko, *Improvement of the refrigeration capacity utilizing for the ambient air conditioning system*, in Advanced Manufacturing Processes II, InterPartner 2020, LNME, pp. 714-723 (2021)
7. R. Radchenko, M. Pyrysunko, A. Radchenko, A. Andreev, V. Kornienko, *Ship engine intake air cooling by ejector chiller using recirculation gas heat*, in Advanced Manufacturing Processes. InterPartner-2020, LNME, pp. 734-743 (2021).
8. R. Radchenko, M. Pyrysunko, V. Kornienko, I.-C. Scurtu, R. Patyk, *Improving the ecological and*

- energy efficiency of internal combustion engines by ejector chiller using recirculation gas heat*, in Integrated Computer Technologies in Mechanical Engineering (ICTM 2020), LNNS, **188**, pp. 531-541 (2021)
9. A. Radchenko, A. Stachel, S. Forduy, B. Portnoi, O. Rizun, *Analysis of the efficiency of engine inlet air chilling unit with cooling towers*, in Advances in Design, Simulation and Manufacturing III (DSMIE 2020), LNME, pp. 322-331 (2020)
  10. M. Radchenko, M. Radchenko, A. Radchenko, R. Radchenko, S. Kantor, D. Kononov, V. Kornienko, Rational loads of turbine inlet air absorption-ejector cooling systems, Proceedings of the Institution of Mechanical Engineers, Part A: Journal of Power and Energy (2021). <https://doi.org/10.1177/09576509211045455>
  11. A. Radchenko, E. Trushliakov, K. Kosowski, D. Mikielewicz, M. Radchenko, Energies **13**, 6201 (2020)
  12. E. Trushliakov, A. Radchenko, S. Forduy, A. Zubarev, A. Hrych, *Increasing the operation efficiency of air conditioning system for integrated power plant on the base of its monitoring*, in Integrated Computer Technologies in Mechanical Engineering (ICTM 2019), AISC, **1113**, pp. 351-360 (2020)
  13. T. Bohdal, W. Kuczynski, Heat Transf. Eng. **32**, 359 (2011)
  14. M. Radchenko, R. Radchenko, V. Tkachenko, S. Kantor, E. Smolyanoy, *Increasing the operation efficiency of railway air conditioning system on the base of its simulation along the route line*, in Integrated Computer Technologies in Mechanical Engineering (ICTM 2019), AISC, **1113**, pp. 461-467 (2020)
  15. N. Radchenko, E. Trushliakov, A. Radchenko, A. Tsoy, O. Shchesiuk, *Methods to determine a design cooling capacity of ambient air conditioning systems in climatic conditions of Ukraine and Kazakhstan*, in AIP Conference Proceedings **2285**, 030074 (2020)
  16. E. Trushliakov, A. Radchenko, M. Radchenko, S. Kantor, O. Zielikov, *The Efficiency of refrigeration capacity regulation in the ambient air conditioning system*, in Advances in Design, Simulation and Manufacturing III (DSMIE 2020), LNME, pp. 343-353 (2020)
  17. M. Radchenko, D. Mikielewicz, V. Tkachenko, M. Klugmann, A. Andreev, *Enhancement of the operation efficiency of the transport air conditioning system*, in Advances in Design, Simulation and Manufacturing III (DSMIE 2020), LNME, pp. 332-342 (2020)
  18. C. Luo, K. Luo, Y. Wang, Z. Ma, Y. Gong, Energy Procedia **105**, 3045 (2017)
  19. Syed Safeer Mehdi Shamsi, Assmelash A. Negash, Gyu Baek Cho, Young Min Kim, Sustainability **11**(7), 1881 (2019)
  20. F. Li, L. Duanm, L. Fu, X. Zhao, Procedia Eng. **146**, 594 (2016).
  21. S. Baldi, T.L. Quang, O. Holub, P. Endel, Energy Conversion and Management **136**, 329 (2017)
  22. C. Fan, D. Pei, H. Wei, Energy Convers. Manag. **171**, 1388 (2018)
  23. Y.C. Miao, C.L. Yu, B.H. Wang, K. Chen, Advanced Materials Research **779**, 469 (2013)
  24. D.A. Sugeng, A.M. Ithnin, N.S.M.S. Amri, M.A. Ahmad, W.J. Yahya, Journal of Advanced Research in Fluid Mechanics and Thermal Sciences **49**(1), 62 (2017)
  25. P. Baskar, A. Senthil Kumar, Alexandria Engineering Journal **56**(1), 137 (2017)
  26. K.R. Patel, V. Dhiman, International Journal of Latest Engineering Research and Applications **2**(9), 37 (2017)
  27. M.K. Wojs, P. Orliński, W. Kamela, P. Kruczyński, *Research on the influence of ozone dissolved in the fuel-water emulsion on the parameters of the CI engine*, in IOP Conference Series: Materials Science and Engineering, **148**, pp. 1-8 (2016)
  28. R.K. Gupta, K.A. Sankeerth, T.K. Sharma, G. Rao, K.M. Murthy, Applied Mechanics and Materials **592**, 1526 (2014)
  29. L. Bohdal, L. Kukielka, A.M. Radchenko, R. Patyk, M. Kułakowski, J. Chodór, *Modelling of guillotining process of grain oriented silicon steel using FEM*, in AIP Conference Proceeding, **2078**, 020080 (2019)
  30. L. Bohdal, L. Kukielka, S. Legutko, R. Patyk, A.M. Radchenko, Materials **13**, 3175 (2020)
  31. V. Kornienko, R. Radchenko, T. Bohdal, M. Radchenko, A. Andreev, *Thermal characteristics of the wet pollution layer on condensing heating surfaces of exhaust gas boilers*, in Advances in Design, Simulation and Manufacturing IV (DSMIE 2021), LNME, pp. 339-348 (2021)
  32. V. Kornienko, R. Radchenko, Ł. Bohdal, L. Kukielka, S. Legutko, *Investigation of condensing heating surfaces with reduced corrosion of boilers with water-fuel emulsion combustion*, in Integrated Computer Technologies in Mechanical Engineering (ICTM 2020), LNNS, **188**, pp. 300-309 (2021)
  33. V. Kornienko, R. Radchenko, D. Kononov, A. Andreev, M. Pyrysunko, *Characteristics of the rotary cup atomizer used as afterburning installation in exhaust gas boiler flue*, in Advances in Design, Simulation and Manufacturing III (DSMIE 2020), LNME, pp. 302-311 (2020)
  34. V. Kornienko, R. Radchenko, D. Mikielewicz, M. Pyrysunko, A. Andreev, *Improvement of characteristics of water-fuel rotary cup atomizer in a boiler*, in Advanced Manufacturing Processes. InterPartner-2020, LNME, pp. 664-674 (2021)