

# Influencing engagement angle on power parameters in flat-belt gears

*Sirozhiddin Kenjayev\**, *Salokhiddin Yunusov*, *Mukhammatsidik Abdurakhimov*, and *Dilafroz Ahmedova*

Tashkent State Transport University, Tashkent, Uzbekistan.

**Abstract.** The article considers the ratio of forces in belt drives, proposes a calculation scheme for the forces of a flat-belt transmission [FBR], and calculates and analyzes the effect of changing the engagement angle and load on the friction coefficient. Belt drives refer to mechanical friction transmissions with a flexible connection and are used if it is necessary to transfer the load between shafts located at considerable distances. The influence of a change in the coefficient of friction of the belt on the power parameters of the transmission is considered.

The load is given in the form of a torque, which is transmitted to the belts by the circumferential force, the tension of the leading branch increases the circumferential force, and that of the driven branch decreases. Power graphs were built, and the analysis shows that the growth of  $\alpha$  hurts the friction coefficient  $f$ . The curves have their own regularity with the value of the approximation R2. The influence of the change in the angle of engagement  $\alpha$  on the coefficient of friction  $f$  with a change in load in the form of belt tensions  $F_1$  and  $F_2$  or  $F_1 - F_2 = F_t$  is considered. Combining these components, it will be possible to calculate and select rational parameters of belt drives; the maximum increase in the friction coefficient, considering the loads on the shaft and supports, allows transmitting torque with a relatively smaller angle  $\alpha$ .

## 1 Introduction

Technical progress requires constant improvement of machine drives, and a significant role in this fall on simple mechanical transmissions, which have not lost their relevance. The increase in speed, the requirements for vibration resistance, reliability, noiselessness, and the dimensions occupied caused further development in the general range of mechanical gears, especially flexible-coupled friction gears [FCFG]. The leader in this direction is the FCFG of mobile vehicles with internal combustion engines, which, in most cases, are a product of large-scale and mass production. In them, any slightest achievements in improving the elements of FCFG, regarding the possibility of reducing the dimensions, increasing the load capacity, and increasing the efficiency and resource, lead to a significant economic result. Such transmissions, especially V-belt variators, are currently assigned even previously uncharacteristic functions as a clutch.

---

\* Corresponding author: [xpert\\_01@bk.ru](mailto:xpert_01@bk.ru)

Belt transmissions are mechanical friction transmissions with a flexible connection and are used if it is necessary to transfer the load between shafts that are located at considerable distances and in the absence of strict requirements for the gear ratio. Despite these shortcomings, industry and national economy belt drives take second place after gear [1,2].

Belts must have a sufficiently high strength under the action of variable loads, have a high coefficient of friction when moving along the pulley, and have high wear resistance. Belt drives are used to drive units from electric motors of small and medium power; for the drive from low-power internal combustion engines. The use of FBG is limited since their performance properties are worse than other types of belt drives. The exception is promising transmissions with film synthetic belts [3, 4].

The main disadvantages include the following: inconstancy of the gear ratio due to belt slippage; gradual stretching of the belts, their fragility; the need for constant care (installation and tension of belts, their alteration, and replacement in case of a break); relatively large overall dimensions of the transmission; high loads on shafts and supports due to belt tension; the danger of oil getting on the belt; low durability at high speeds (ranging from 1000 to 5000 h) [5-7].

The work of a belt drive is based on the condition of friction between the belt and the pulley. Otherwise, slippage of the belt occurs between the belt and the pulleys, which leads to a change in the gear ratio. To increase the friction between the belt and the pulley, the belt is tensioned with a tension roller, the belt is rubbed with special pastes, and wedge-shaped grooves are made on the pulleys, in which the V-belt is placed [8, 9].

In belt drives, the belt serves as an intermediate link between the driver pulley and the driven pulleys. Its main function is the implementation of torques there due to friction forces on the working surfaces. The latter is located on the arcs of the pulleys, which are not completely closed in the ring. But it is known that when loading with an open or open thin-walled profile torque, the distribution of tangential torsional stresses differs from those for a closed one [10-13].

## 2 Methods

Let us consider the power relations in belt drives; we are interested in the effect of changing the belt friction coefficient on the power transmission parameters. We will set the load on the tensioned belts as a torque, which is transmitted to the belts by circumferential force. The theory of belt transmissions shows that when the driving branch is tensioned, the circumferential force increases while that of the driven branch decreases. From the condition of force balance in a belt drive, it is known that  $F_1 - F_2 = F_t$  and also the total tension of the branches, regardless of the ratio of  $F_1$  and  $F_2$ , remains constant and equal to  $2F_0$ , that is,  $F_1 + F_2 = 2F_0$ . These relationships show how  $F_1$  and  $F_2$ , depend on the preload  $F_0$  and the payload  $F_t$ , note that the relationship between the maximum allowable load and the friction forces between the pulley and the belt is not disclosed here. Euler first considered this problem, who proposed a calculation scheme as the interaction of an flexible inextensible thread with a rotating cylinder. The belt has flexibility regarding flexural elasticity and tension in a belt drive, so this Euler solution can be considered an approximation. When using the Euler formulas in practical calculations, it is necessary to consider correction factors depending on the belt type [14, 15].

In Fig.1. a design scheme for the efforts of an FBG is proposed. We select two radial sections with an angle  $d\alpha$  element of the belt. It is subjected to tensile forces  $F$  and  $F + dF$ , normal pressure force  $dF_n$  from the side of the pulley, and friction force  $dF_{TP} = f dF_n$ , where  $f$  is the coefficient of friction. The weight of the belt is not considered; from the theory, it can be argued that it does not affect the operation of the driving forces [14]. We assume that at a constant load: the rotation of the pulleys is uniform, the movement of the

belt is steady, and the belt is in an elastic state of tension. Let's single out the part of the belt covering the drive pulley as a continuous medium (Fig. 1). The environment is limited by a control surface consisting of cylindrical inner and outer surfaces, two side surfaces perpendicular to the axis of rotation of the pulleys, and two flat radial cross sections of the belt running and coming off. With a constant resistance, the movement of the belt as a continuous medium is steady. The density and cross-sectional area of the driven branch and the belt in an unstressed state differ insignificantly [17].

From the equilibrium conditions, we compose a system of equations concerning the tangent and normal

$$\begin{cases} F \cos \frac{d\alpha}{2} + dF_{TP} - (F + dF) \cos \frac{d\alpha}{2} = 0 \\ (F + dF) \sin \frac{d\alpha}{2} + F \sin \frac{d\alpha}{2} - dF_n = 0. \end{cases}$$


If  $dF_{TP} = f dF_n$ , and  $\sin \frac{d\alpha}{2} \approx \frac{d\alpha}{2}$ ,  $\cos \frac{d\alpha}{2} \approx 1$ , then after some simplifications, we get

$$\frac{dF}{F} = f d\alpha.$$

Integrating this equation within the limits of the change in  $F$  and the angle of the elastic sliding arc  $\alpha$ , we obtain,

$$\frac{dF}{F} = f \int_0^\alpha d\alpha; \quad \ln \frac{F_1}{F_2} = f\alpha$$

$$\frac{F_1}{F_2} = e^{f\alpha} \tag{1}$$

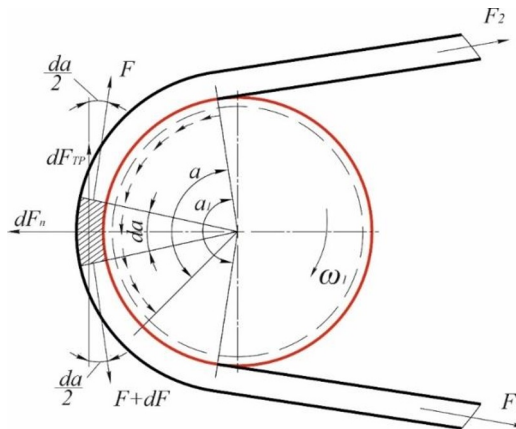

**Fig.1.** Calculation scheme of forces of FBG

Having written (1) in the form  $\left(\frac{F_0 + \frac{F_t}{2}}{F_0 - \frac{F_t}{2}}\right) = e^{f\alpha}$  and  $F_0$  can be written in the following form

$$F_0 = \frac{F_t e^{f\alpha + 1}}{2e^{f\alpha} - 1} \tag{2}$$

To determine the minimum allowable value  $F_0$ , at which it is possible to transfer a given payload  $F_t$ , the angle of the elastic sliding arc is set as,  $\alpha = \alpha_1$  and we get

$$F_0 \geq \frac{F_t}{2} \frac{e^{f\alpha_1+1}}{e^{f\alpha_1-1}} \tag{3}$$

From (3), it can be seen that the load capacity is directly proportional to the angle  $\alpha_1$  on the driving pulley and the coefficient of friction. Note that a decrease in the center distance  $a$  and an increase in the gear ratio  $U$ , the wrap angle  $\alpha_1$  decreases.

The optimal value of the tension coefficient does not depend on the transmitted power and pretension. Still, it depends only on the properties of the friction pair of materials from which the belt and pulley are made, as well as on the design parameters of the transmission itself. To increase the load capacity of the belt drive, it is necessary to increase the pretension force  $F_0$ , but it must be taken into account that this will lead to an increase in the loads on the shafts and supports.

With a significant overload, the sliding arc  $\alpha_1$  reaches the wrapping arc  $\alpha$ , and the belt slides over the entire contact surface with the drive pulley, i.e., it slips. When slipping, the driven pulley stops, efficiency transmission drops to zero. The main criteria for the performance of belt drives are traction ability, which depends on the value of the friction forces between the belt and the pulley, and belt durability, i.e., its ability to resist fatigue failure [16]. When designing a transmission, it must be considered that an increase in the pretension force  $F_0$  to increase the load capacity leads to an increase in the loads on the shafts and supports [19].

### 3 Results and Discussions


It is known from the theory of belt drives that preliminary tension  $F_0$  affects  $f$ - coefficient of friction and  $\alpha$ -angle of elastic sliding arc (engagement angle). It will be possible to calculate these dependencies using the presented equations while the torque on the drive pulley was taken from 45 to 150 Nm.

Consider the analysis of changes in the engagement factor  $\alpha$  by the factor  $f$  under load in the form of belt tensions  $F_1$  and  $F_2$  or  $F_1 - F_2 = F_t$ . We are also interested in the question of changes in conditions depending on conditions. From (1), it is possible to determine the calculated dependence of  $\alpha$  on the coefficient  $f$ , which is given in Table-1.

**Table 1.** Dependence of angle of engagement on coefficient of friction at torque  $T=45$  Nm on driven pulley with diameter of  $d=125$  mm.

| $F_2$ | $F_0$ | $F_t$ | $\alpha = 150^\circ$ | $\alpha = 160^\circ$ | $\alpha = 170^\circ$ | $\alpha = 180^\circ$ |
|-------|-------|-------|----------------------|----------------------|----------------------|----------------------|
| 53    | 386.5 | 667   | 0.997                | 0.9348               | 0.8799               | 0.8309               |
| 58    | 389   | 662   | 0.963                | 0.9025               | 0.8495               | 0.8022               |
| 63    | 391.5 | 657   | 0.931                | 0.8728               | 0.8216               | 0.7758               |
| 68    | 394   | 652   | 0.902                | 0.8455               | 0.7959               | 0.7515               |
| 73    | 396.5 | 647   | 0.875                | 0.8201               | 0.7719               | 0.7289               |
| 78    | 399   | 642   | 0.85                 | 0.7963               | 0.7496               | 0.7078               |
| 83    | 401.5 | 637   | 0.826                | 0.7741               | 0.7286               | 0.688                |
| 88    | 404   | 632   | 0.803                | 0.7531               | 0.7089               | 0.6694               |
| 93    | 406.5 | 627   | 0.782                | 0.7333               | 0.6903               | 0.6518               |
| 98    | 409   | 622   | 0.762                | 0.7145               | 0.6726               | 0.6351               |
| 103   | 411.5 | 617   | 0.743                | 0.6967               | 0.6558               | 0.6193               |
| 108   | 414   | 612   | 0.725                | 0.6797               | 0.6398               | 0.6042               |
| 113   | 416.5 | 607   | 0.708                | 0.6635               | 0.6246               | 0.5898               |
| 118   | 419   | 602   | 0.691                | 0.648                | 0.61                 | 0.576                |
| 123   | 421.5 | 597   | 0.675                | 0.6331               | 0.596                | 0.5628               |

Analysis of the obtained data shows that when the engagement angle  $\alpha = 150^0$  the friction coefficient, in this case, is greater than when the engagement angle  $\alpha = 180^0$ .

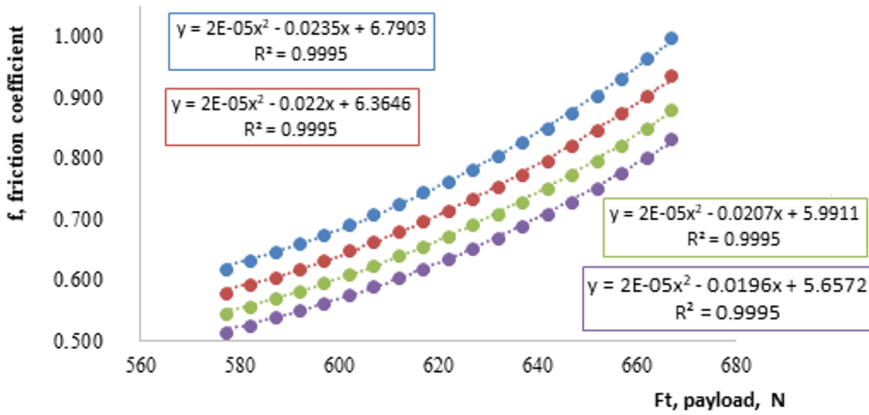


**Fig. 2.** Dependences of the influence of the angle of engagement on the coefficient of friction at a torque of  $T=45$  Nm on a driven pulley with a diameter of  $d=125$  mm.

An analysis of the obtained graphical dependencies shows that each curve corresponds to a certain regularity and has equations with an approximation value of  $R^2$ . If the engagement angle  $\alpha = 150^0$  and the payload is taken in the range  $F_t$  from 577 Nm to 667 Nm, then, accordingly, the friction coefficient  $f$  has values from 0.675 to 0.997, and also with the growth of the angle  $\alpha$  from  $150^0$  to  $180^0$  the friction coefficient  $f$  is inversely proportional, that is, at  $F_t=597$  Nm 0.691 to 0.562, and at  $F_t=667$  Nm 0.997 to 0.830.

If we take into account that  $F_1/F_2 = e^{f\alpha}$ , then it can be argued that for equal values of the angle  $\alpha$ , the friction coefficient will depend on  $F_t$ . Tables 2 and 3 show the results of calculating the effect of changing the engagement angle from  $\alpha = 150^0$  to  $\alpha = 180^0$  and torque from  $90^0$  Nm to 135 Nm on the friction coefficient on the driven pulley with a diameter of  $d=125$  mm.

**Table 2.** Dependence of angle of engagement on coefficient of friction at torque  $T=90$  Nm on driven pulley with diameter of  $d=125$  mm

| $F_2$ | $F_0$ | $F_t$ | $\alpha = 150^0$ | $\alpha = 160^0$ | $\alpha = 170^0$ | $\alpha = 180^0$ |
|-------|-------|-------|------------------|------------------|------------------|------------------|
| 106   | 773   | 1334  | 0.997            | 0.9348           | 0.8799           | 0.8309           |
| 111   | 775   | 1329  | 0.98             | 0.9183           | 0.8644           | 0.8162           |
| 116   | 778   | 1324  | 0.963            | 0.9025           | 0.8495           | 0.8022           |
| 121   | 780.5 | 1319  | 0.947            | 0.8874           | 0.8353           | 0.7887           |
| 126   | 783   | 1314  | 0.931            | 0.8728           | 0.8216           | 0.7758           |
| 131   | 785.5 | 1309  | 0.916            | 0.8589           | 0.8085           | 0.7634           |
| 136   | 788   | 1304  | 0.902            | 0.8455           | 0.7959           | 0.7515           |
| 141   | 790.5 | 1299  | 0.888            | 0.8325           | 0.7837           | 0.74             |
| 146   | 793   | 1294  | 0.875            | 0.8201           | 0.7719           | 0.7289           |
| 151   | 795.5 | 1289  | 0.862            | 0.808            | 0.7606           | 0.7182           |
| 156   | 798   | 1284  | 0.85             | 0.7963           | 0.7496           | 0.7078           |
| 161   | 800.5 | 1279  | 0.838            | 0.785            | 0.739            | 0.6978           |
| 166   | 803   | 1274  | 0.826            | 0.7741           | 0.7286           | 0.688            |
| 171   | 805.5 | 1269  | 0.815            | 0.7634           | 0.7186           | 0.6786           |
| 176   | 808   | 1264  | 0.803            | 0.7531           | 0.7089           | 0.6694           |

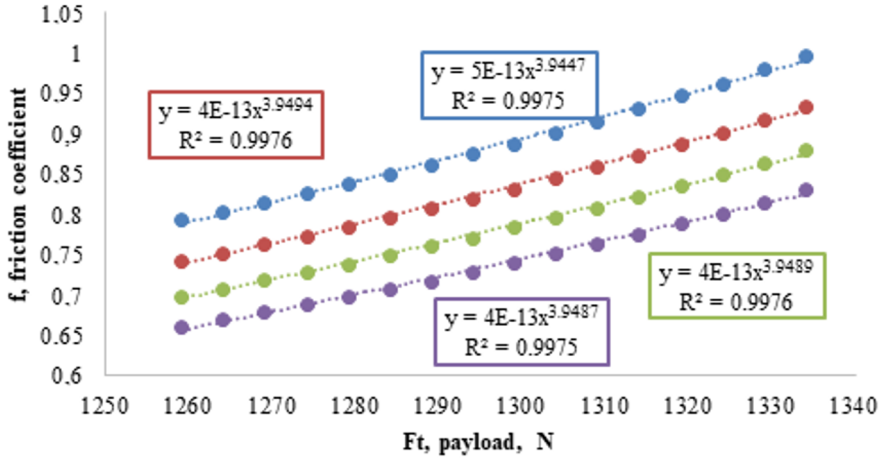


**Fig. 3.** Dependences of influence of angle of engagement on coefficient of friction at torque of  $T=90$  Nm on driven pulley with diameter of  $d=125$  mm

With the help of the calculated data obtained, power graphs were constructed (Fig. 3.), the analysis of which shows that the growth of  $\alpha$  negatively affects the friction coefficient  $f$ , which was to be expected. The curves have their own regularity with the value of the approximation  $R^2$ . If we vary the engagement angle within  $150^\circ \dots 180^\circ$  at load  $F_t = 1264$  Nm, respectively, the friction coefficient  $f$  will be from 0.803 to 0.669, and at the load  $F_t = 1334$  Nm, the friction coefficient  $f$  from 0.99 to 0, 83.

**Table 3.** Dependence of angle of engagement on coefficient of friction at torque  $T=135$  Nm on driven pulley with diameter of  $d=125$  mm

| F2  | F0     | Ft   | $\alpha = 150^\circ$ | $\alpha = 160^\circ$ | $\alpha = 170^\circ$ | $\alpha = 180^\circ$ |
|-----|--------|------|----------------------|----------------------|----------------------|----------------------|
| 159 | 1159.5 | 2001 | 0.997                | 0.9348               | 0.8799               | 0.8309               |
| 164 | 1162   | 1996 | 0.985                | 0.9237               | 0.8695               | 0.821                |
| 169 | 1164.5 | 1991 | 0.974                | 0.9129               | 0.8593               | 0.8115               |
| 174 | 1167   | 1986 | 0.963                | 0.9025               | 0.8495               | 0.8022               |
| 179 | 1169.5 | 1981 | 0.952                | 0.8923               | 0.84                 | 0.7931               |
| 184 | 1172   | 1976 | 0.941                | 0.8825               | 0.8307               | 0.7844               |
| 189 | 1174.5 | 1971 | 0.931                | 0.8728               | 0.8216               | 0.7758               |
| 194 | 1177   | 1966 | 0.921                | 0.8635               | 0.8128               | 0.7675               |
| 199 | 1179.5 | 1961 | 0.912                | 0.8544               | 0.8042               | 0.7594               |
| 204 | 1182   | 1956 | 0.902                | 0.8455               | 0.7959               | 0.7515               |
| 209 | 1184.5 | 1951 | 0.893                | 0.8368               | 0.7877               | 0.7438               |
| 214 | 1187   | 1946 | 0.884                | 0.8283               | 0.7797               | 0.7363               |
| 219 | 1189.5 | 1941 | 0.875                | 0.8201               | 0.7719               | 0.7289               |
| 224 | 1192   | 1936 | 0.866                | 0.812                | 0.7643               | 0.7217               |
| 229 | 1194.5 | 1931 | 0.858                | 0.8041               | 0.7569               | 0.7147               |

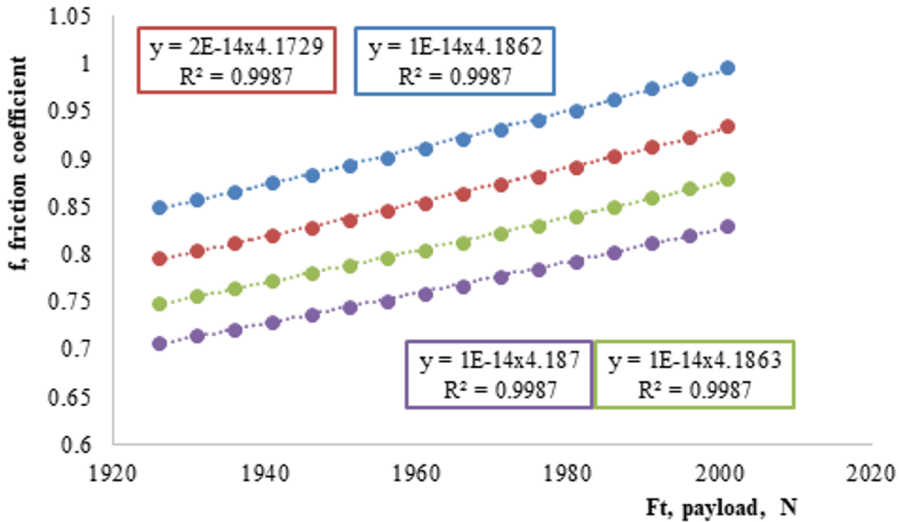

**Fig. 4.** Dependences of influence of angle of engagement on coefficient of friction at torque of  $T=135$  Nm on driven pulley with diameter of  $d=125$  mm

On fig. 4 presents the influence of the angle of engagement on the coefficient of friction at a torque of  $T = 135$  Nm. The graphs were built using the EXCEL computer program; the trend line is a power law with  $R^2$  approximation. Consider a combination of angle changes  $\alpha$  from  $150^0$  to  $180^0$  and payload  $F_t$  from 1931 Nm to 2001 Nm, then at their minimum values, the friction coefficient equals  $f=0.858$ , and their maximum values equals  $f=0.83$ .

The results and analysis of the calculations correspond to the theoretical foundations, that is, the engagement angle, load, and friction coefficient in belt drives are proportional. Combining these components makes it possible to calculate and select rational parameters of belt drives. We want to change the coefficient of friction between the belt and the pulley. Research is underway to develop a new belt drive design with increased frictional data.

## 4 Conclusions

It can be seen from the results of the calculations that by varying the angle  $\alpha$ , the friction coefficient  $f$  can be corrected, taking into account the payload  $F_t$ . In practice, belt tensioners are used for this. We are interested in the maximum increase in the coefficient of friction, which, in turn, will make it possible to transmit torque from the driving pulley to the driven pulley with a relatively smaller angle  $\alpha$ . But at the same time, it should be considered that a high friction force is provided at wrapping angles on a small pulley of FBG when  $\alpha \geq 150^\circ$ . Using materials with a high coefficient of friction in the construction of the belt leads to decreased service life due to increased heat generation and wear.

## References

1. Krawiec, P., Warguła, Ł., Waluś, K.J., Gawrońska, E., Ságová, Z., Matijošius, J. Efficiency and Slippage in Draw Gears with Flat Belts, *Energies*, 15 (23). (2022)
2. Plekhanov A.F., Mamatova D.A., Djuraev A., Sarttarova L.T., Dikenova D.B. Justification parameters of belt transmission with a composition tensional roller with elastic elements. *Izvestiya Vysshikh Uchebnykh Zavedenii, Seriya Tekhnologiya*

- Tekstilnoi Promyshlennosti, 389 (5), pp. 196 – 203. (2020)
3. Stehlikova B., Molnar V., Fedorko G., Michalik P., Paulikova A. Research about influence of the tension forces, asymmetrical tensioning and filling rate of pipe conveyor belt filled with the material on the contact forces of idler rolls in hexagonal idler housing. *Journal of the International Measurement Confederation*. (2020)
  4. Hamasaki Y. Energy saving technology of flat belts: Meandering control of belts. *Toraibarojisuto Journal of Japanese Society of Tribologists*, 63(8), pp.532 - 538. (2018).
  5. Choudhury P., Kumar R., Singh S. Power Loss Optimization in a Flat Belt Drive. *Advances in Manufacturing Technology: Computational Materials Processing and Characterization*, pp. 121 - 133, (2022).
  6. Turakulov M., Tursunov N., Alimukhamedov S. Development of technology for manufacturing molding and core mixtures for obtaining synthetic cast iron. In *E3S Web of Conferences*, 365, p. 05006, (2023).
  7. Radkevich M., Pulatova T., Shipilova K., Pochuzhevsky O., Gapirov A., Turakulov M. Possibilities of using lianas for greening automobile roads. In *E3S Web of Conferences*, 264, p. 01034 (2021).
  8. Gramblička S., Kohár R., Stopka M. Dynamic Analysis of Mechanical Conveyor Drive System. *Procedia Engineering*, 192, pp. 259 – 264. (2017).
  9. Zhang W., Wang C., Zhang F. The performance analysis and research about a type of new tubular belt *Key Engineering Materials*, 561, pp. 255 – 259. (2013).
  10. Sun C., Ren A., Sun G., Liu Y. The calculation of the classical V-belt life with different reliability. *Procedia Engineering*, 15, pp. 5290 – 5293. (2011).
  11. Yunusov S., Sulstonov A., Rakhmatov M., Bobomurotov T., Agzamov M. Results of studies on extending the time operation of gin and linter grates. *E3S Web of Conferences*, 304, p. 03028, (2021).
  12. Pozhbelko V.I. Limiting traction of flat, round, and V-belt transmissions. *Russian Engineering Research*, 35 (6), pp. 403-406. (2015)
  13. Dzhuraev A., Yunusov S., Mirzaumidov A., Umarov K., Matkarimov A. Development of an effective design and calculation for the bending of a gin saw cylinder. *International Journal of Advanced Science and Tech.*, 29 (4), pp. 1371 – 1390. (2020).
  14. Prasad D., Cassenti B.N. Development and validation of a model for flat belt tracking in pulley drive systems. *Journal of Dynamic Systems, Measurement and Control, Transactions of the ASME*, 134 (1). (2012).
  15. Wasfy T.M., Yildiz C., Wasfy H.M., Peters J.M. Effect of Flat Belt Thickness on Steady-State Belt Stresses and Slip. *Journal of Computational and Nonlinear Dynamics*, 11 (5). (2016)
  16. Mikhail Belov. The calculation of the belt transmission. *Universum: technical sciences: electron. scientific journal*. 2017. № 5 (38).
  17. Yunusov, S. Z., Kenzhaboev, Sh. Sh., & Makhmudova, Sh. A. (2022). Influence of changing the parameters of the elastic element of the composite shaft support on the resulting stresses in the system. *Universum: технические науки*, (10-1 (103)), 55-60.
  18. Shermukhamedov, A. and Ergashev, N. and Azizov, A. Substantiating parameters brake system of the tractor trailer. In *E3S Web of Conferences*, Vol. 264. (2021).
  19. Krawiec P. Analysis of selected dynamic features of a two-wheeled transmission system. *Journal of Theoretical and Applied Mechanics (Poland)*, 55 (2), pp. 461 - 467. (2017).