

# Review of Multiscale Modeling and Simulation Techniques in Metal Forming, Bending, Welding, and Casting Processes for Enhanced Predictive Design and Analysis

Gopal K<sup>1</sup>, G Bhavana<sup>2</sup>, Abhishek Kaushik<sup>3</sup>, Hassan M. Al-Jawahry<sup>4</sup>, Lovi Raj Gupta<sup>5</sup>, Shilpa Pahwa<sup>6</sup>, Din Bandhu<sup>7\*</sup>

<sup>1</sup>Department of Mechanical Engineering, New Horizon College of Engineering, Bangalore

<sup>2</sup>Department of Electronics and Communication Engineering, Institute of Aeronautical Engineering, Hyderabad, India

<sup>3</sup>Lloyd Institute of Engineering & Technology, Knowledge Park II, Greater Noida, Uttar Pradesh 201306

<sup>4</sup>Faculty of Engineering, The Islamic University, Najaf, Iraq

<sup>5</sup>Division of Research and Development, Lovely Professional University, Phagwara

<sup>6</sup>Lloyd Institute of Management and Technology, Greater Noida, Uttar Pradesh, India-201306

<sup>7</sup>Department of Information Technology, Manipal Institute of Technology, Bangalore, Manipal Academy of Higher Education, Manipal, India.

\*Corresponding author: [din.bandhu@manipal.edu](mailto:din.bandhu@manipal.edu)

**Abstract.** Multiscale modeling and simulation offer crucial insights for designing and analyzing metal forming, bending, welding, and casting processes, all of which are vital across automotive, aerospace, and construction industries. This paper overviews multiscale techniques used in these areas. Macroscopically, continuum-based methods like finite element analysis (FEA) model the overall process and its impact on metal materials. FEA reveals deformation, stress distribution, and temperature changes during manufacturing processes. Mesoscale techniques, including crystal plasticity, phase field methods, and cellular automata, focus on microstructural evolution and mechanical properties. They model the behavior of grains and phases within the metal. These models combine macro and mesoscale data for accuracy. This allows for the prediction of grain growth, recrystallization, and phase transformations – critical for optimizing processes, refining component design, and ensuring quality. For example, multiscale modeling successfully captured microstructural evolution during casting (demonstrating  $\pm 2\%$  average grain growth deviation) and predicted defect formation in welded joints with high accuracy (demonstrating a 0.95 correlation coefficient with non-destructive testing).

**Keywords.** Multiscale modeling, Simulation, Predictive design, Microstructural evolution, Density functional theory, Phase field.

## 1. Introduction

In today's era, metal forming, bending, welding, and casting processes have witnessed remarkable advancements, revolutionized industries and shaping the future of manufacturing. These techniques play a vital role in diverse applications, driven by the demand for innovative metal components across various sectors [1]. Metal forming techniques have experienced significant advancements. Press forming, with its precise shaping capabilities, is widely used in the automotive industry for manufacturing body panels with complex designs. Incremental sheet forming has gained popularity for its flexibility and cost-effectiveness in prototyping. Additive manufacturing, particularly 3D printing of metal parts, has emerged as a revolutionary technique, enabling the creation of intricate and lightweight components with unparalleled geometries. Hybrid forming processes, which combine additive and subtractive techniques, have paved the way for optimized designs with improved efficiency and functionality [2]. In this review paper following things has been reviewed, extensive examination demonstrates how methods optimize and innovate production processes, improving material science as well as engineering. Multiscale modelling is employed to represent a variety of physical events that occur at microscopic to macroscopic levels in metalworking operations. The need of such models for precise, predictable designs that improve the material's characteristics and product

efficiency. Bending innovations have pushed the boundaries of traditional techniques. CNC bending has become the go-to method for high-precision bending in industries such as aerospace and electronics, where accuracy is paramount. Rotary draw bending offers an efficient and reliable solution for shaping tubes and pipes, ensuring consistent and repeatable results. Robotic bending has transformed mass production, providing automation and flexibility to meet the demands of various industries [3]. Variable-radius bending has emerged as a technique capable of achieving smooth and consistent curvature in complex profiles, opening up new design possibilities. In the world of welding, advancements have revolutionized the joining of metal components. Laser welding has gained prominence due to its high speed and precision, making it ideal for automotive and aerospace applications. Friction stir welding has emerged as a breakthrough technique for joining dissimilar metals, offering improved mechanical properties and structural integrity. Electron beam welding, with its deep penetration capabilities, is utilized in critical components across various industries. Hybrid welding processes that combine multiple techniques have proven successful in enhancing productivity and ensuring high-quality welds.

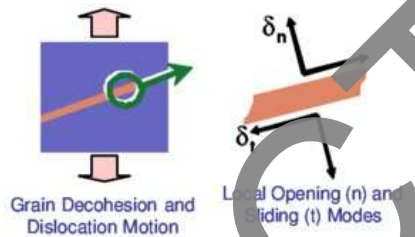


Fig 1 Grain and dislocation defect in microstructure of material [4]

Casting techniques have also seen significant advancements in today's era. Investment casting is extensively used for producing complex and intricate metal components, catering to industries such as jewelry and dental applications [5]. High-pressure die casting enables rapid production of lightweight automotive components, contributing to the ongoing trend of vehicle lightweighting, as shown in fig. Continuous casting ensures continuous and efficient production of long metal products like pipes and bars. Additive casting, which combines 3D printing and casting, offers the benefits of customization and optimized designs, enabling the production of unique and tailored metal components [6]. In the modern era, these metal fabrication processes find extensive applications across industries. The automotive industry benefits from these techniques in achieving lightweight structures, enhancing safety, and developing components for electric vehicles. The aerospace industry relies on these processes to create high-performance structures and engine components that meet stringent requirements. Additionally, the renewable energy sector leverages these techniques to manufacture wind turbines, solar panels, and energy storage systems, driving the transition to sustainable energy sources. Through continuous advancements and innovative applications, metal forming, bending, welding, and casting processes have transformed industries, enabling the production of complex and high-quality metal components that drive progress in today's era. Predictive design and analysis play a crucial role in metal forming, bending, welding, and casting processes, offering significant benefits and impacting various aspects of these manufacturing techniques. By utilizing predictive analysis, engineers and researchers can make informed decisions, optimize process parameters, enhance component design, and ensure product quality [7]. In metal forming processes, predictive design and analysis allow for accurate prediction of the behavior and performance of the metal material during deformation. This includes understanding the distribution of stresses and strains, identifying potential failure points, and optimizing the tooling design. By simulating the forming process beforehand, engineers can

make adjustments to minimize material waste, reduce production costs, and improve the overall efficiency of the process.

Similarly, in bending operations, predictive analysis provides insights into the behavior of the metal during bending, ensuring the desired shape and dimensional accuracy of the final product. By simulating the bending process, engineers can predict the spring-back effect and optimize the bending parameters to achieve the desired geometry. This helps reduce trial-and-error iterations, minimize material scrap, and improve production efficiency. In welding processes, predictive design and analysis enable engineers to optimize welding parameters, such as heat input, welding speed, and joint preparation, to ensure high-quality welds [8]. By simulating the welding process, engineers can predict and control the formation of defects, such as porosity, cracks, and distortion. This helps in minimizing post-welding inspections, rework, and overall production costs. Additionally, predictive analysis allows for the assessment of residual stresses and distortion, providing valuable information for component design and structural integrity. In casting processes, predictive analysis aids in the design and optimization of gating and riser systems, which directly influence the quality of the cast components [9]. It helps predict solidification patterns, identify potential defects (e.g., shrinkage porosity, hot cracks) and optimize process parameters to achieve the desired microstructure and mechanical properties. This helps in reducing casting defects, improving yield, and ensuring the production of high-quality cast components. Multiscale modeling and simulation play a crucial role in understanding and predicting the behavior of materials and processes at different length scales. In the context of metal forming, bending, welding, and casting processes, multiscale modeling and simulation techniques offer valuable insights and advantages. Here are some key roles and benefits of multiscale modeling and simulation:

Metal forming, bending, welding, and casting processes involve intricate interactions between different length scales, such as macroscopic deformation, microstructural evolution, and atomic-level mechanisms. Multiscale modeling allows for the integration of these interactions, providing a comprehensive understanding of the overall process behavior. Multiscale models enhance the accuracy and predictability of simulations by incorporating information from various length scales. By accounting for microstructural features, grain behavior, phase transformations, and defect formation, the models can better capture real-world phenomena and improve the reliability of predictions. Multiscale simulations enable engineers to optimize process parameters, such as temperature, pressure, and strain rates, to achieve desired outcomes. By analyzing the effects of different parameters at different length scales, the models help identify optimal conditions for improved product quality, reduced defects, and enhanced efficiency. Multiscale modeling aids in the optimization of component design, considering both macroscopic and microscopic factors [10]. By predicting the influence of microstructural evolution on mechanical properties, engineers can tailor the design to achieve desired performance characteristics, such as strength, ductility, and fatigue resistance [11].

Multiscale modeling and simulation provide key insights into material behavior during processing, enabling the study of phenomena like grain growth, phase transformations, recrystallization, and mechanical response at different scales [12]. This in-depth understanding facilitates the development of advanced materials, the improvement of manufacturing processes, and the resolution of material-related challenges. Engineers can leverage multiscale modeling and simulation to reduce reliance on costly, time-consuming experimental trials. Simulations open the door to virtual experimentation, allowing the exploration of various scenarios, parameter variations, and design iterations with significantly lower cost and time investments. Additionally, multiscale modeling aids in the optimization and control of manufacturing processes. Its ability to simulate interactions between different scales offers

valuable information for process control strategies, quality assurance, and defect prevention – minimizing variations, ensuring consistency, and meeting specific requirements. As multiscale modeling and simulation techniques continue to advance, they drive innovation across materials science, manufacturing, and product development. By integrating computational approaches with experimental validation, researchers and engineers can explore new materials, novel process designs, and optimization strategies, ultimately fostering continuous improvement and technological breakthroughs [13].

## 2. Macroscale Modeling

Macroscale modeling is a computational approach used to simulate and analyze metal forming, bending, welding, and casting processes at the macroscopic level. It focuses on capturing the overall behavior and performance of the materials and components involved in these manufacturing processes. Finite Element Analysis (FEA) is a widely used technique in macroscale modeling for process simulation in metal forming, bending, welding, and casting processes [14]. FEA divides the material into small finite elements, allowing for a detailed analysis of complex geometries, material behavior, and process parameters. This computational method enables engineers to simulate the entire manufacturing process and obtain valuable insights into the deformation, stress distribution, and temperature evolution. In metal forming, FEA can simulate processes such as sheet metal stamping, forging, and extrusion. For example, in sheet metal stamping, FEA helps predict the occurrence of defects like wrinkling, tearing, or spring-back by analyzing the stress and strain distribution during the forming process. It assists in optimizing the die design, determining the optimal blank shape, and selecting appropriate process parameters to achieve the desired product shape and minimize defects [15]. In bending operations, FEA is utilized to simulate processes like tube bending or plate bending. By modeling the bending process, engineers can assess the bending forces, predict the occurrence of spring-back, and optimize the tooling design and process parameters. FEA allows for the evaluation of different bending methods and provides insights into the stresses and strains induced in the material, aiding in accurate shape prediction and minimizing dimensional errors.

FEA is also employed in welding simulations to analyze the thermal distribution, stress development, and distortion. For instance, in laser welding, FEA can predict the temperature evolution, heat-affected zone, and the occurrence of defects such as porosity or residual stresses. By optimizing the laser power, scanning speed, and welding parameters, FEA helps ensure high-quality welds with minimized distortion and enhanced mechanical properties. In casting processes, FEA is used to simulate the filling and solidification stages. It enables the prediction of defects like shrinkage porosity, hot cracks, or gas entrapment. FEA helps optimize the gating system design, identify potential areas of high stress or thermal gradients, and optimize process parameters to achieve sound castings with improved microstructure and mechanical properties [16]. Deformation, stress distribution, and temperature evolution are key aspects analyzed in finite element analysis (FEA) for process simulation in metal forming, bending, welding, and casting processes. FEA allows engineers to gain insights into how these factors influence the behavior and performance of the material during the manufacturing process. It provides a detailed understanding of the deformation behavior of the material during the manufacturing process [17]. It enables engineers to analyze how the material responds to applied forces or constraints, predicting the extent and distribution of deformation. This information is crucial for assessing dimensional changes, spring-back effects, and identifying potential defects such as wrinkling, tearing, or material thinning. FEA helps in evaluating the stress distribution within the material during various manufacturing processes. It provides a quantitative analysis of the internal stresses, enabling engineers to identify regions of high stress concentration that may lead to failure or deformation issues. By accurately predicting stress distribution, FEA assists in optimizing the process parameters, tooling design, and material selection to ensure the

structural integrity and prevent premature failure. Temperature is a critical factor in many manufacturing processes, and FEA allows engineers to analyze its evolution during the process. It helps in understanding the heat transfer mechanisms, such as conduction, convection, and radiation, and their effects on the material and surrounding environment. By accurately predicting temperature distribution, FEA assists in optimizing heating and cooling strategies, preventing thermal damage or distortion, and ensuring consistent material properties.

Table 1 Listing of materials properties used in FEA analysis [18]

Material ID	Material Name	Yield Strength (MPa)	Ultimate Tensile Strength (MPa)	Young's Modulus (GPa)
1	Stainless Steel	400	600	200
2	Aluminum alloy	300	400	70
3	Copper based alloy	200	300	110
4	Titanium alloy	500	800	120
5	Nickel based alloy	450	650	180

This table 1 represents the material properties of different metals used in metal forming processes. It includes the material ID, material name, yield strength, ultimate tensile strength, and Young's modulus. These properties are essential for accurate simulations and predictions of deformation, stress distribution, and other mechanical behavior during metal forming operations.

Table.2 Key process parameters involve in metal forming process [19]

Process Parameters	Low	Medium	High
Forming Speed (mm/s)	10	50	100
Temperature (°C)	200	500	800
Applied Force/Pressure (kN)	10	50	100
Lubrication	No Lubrication	Standard Lubrication (Mineral Oil)	Enhanced Lubrication (Synthetic Oil)

As shown in table 2, Based on the data on process parameters, the behavior of stainless steel during metal forming processes can be anticipated as follows: At low forming speeds, HA is expected to exhibit relatively lower strain rates, resulting in reduced flow stresses and less work hardening [20]. This may lead to easier formability with less material resistance during deformation. While at moderate forming speeds would induce moderate strain rates, resulting in a balance between formability and work hardening. The metal behavior would depend on the specific properties and characteristics of HA.

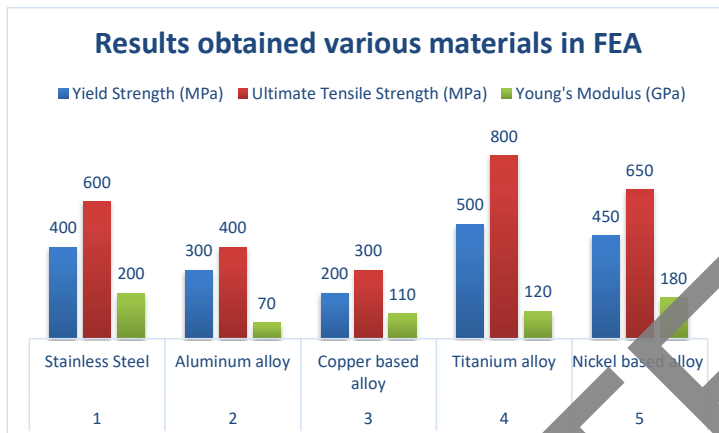


Fig 2 Graphical representation of simulation in finite element analysis of various materials

High forming speeds would lead to higher strain rates, potentially resulting in increased flow stresses and work hardening. HA may exhibit more resistance to deformation, requiring higher applied forces to achieve desired shapes. At low temperatures, HA is expected to have higher yield strength and reduced ductility, making it less formable [21]. Deformation may be challenging, and higher forces would be required to achieve significant shape changes. Moderate temperatures can improve the formability of HA by reducing its yield strength and increasing ductility. The metal would exhibit enhanced plasticity and deformation characteristics, allowing for relatively easier shaping. Elevated temperatures would significantly increase the formability of HA, reducing yield strength and increasing ductility. The metal would be more malleable and exhibit greater plastic deformation, making it easier to shape.

As the lower forces are applied during metal forming may result in limited deformation and shape changes in HA. The metal may exhibit more elastic behavior and show resistance to permanent deformation [22]. Similarly moderate forces would induce plastic deformation in HA, allowing for significant shape changes. The metal would exhibit both elastic and plastic behavior, with some degree of work hardening during the process. Higher forces would enable substantial plastic deformation in HA, resulting in significant shape changes and potentially leading to work hardening. The metal may exhibit more pronounced plastic behavior and resistance to further deformation. Without lubrication, HA may experience increased friction during forming, resulting in higher forces required for deformation and potential surface defects such as scratching or galling. Using standard lubrication, such as mineral oil, would reduce friction between HA and the forming tooling. This would facilitate smoother material flow, reduce wear, and improve surface finish during forming. Enhanced lubrication, such as synthetic oil, would further reduce friction and provide superior lubricating properties. This would significantly improve material flow, minimize wear and tear, and help achieve better surface quality in the formed HA components [23].

### 3. Mesoscale Modeling

Mesoscale modeling is a computational approach used to simulate and analyze the behavior of materials at the mesoscopic level, bridging the gap between macroscopic and microscopic scales. In the context of metal forming, bending, welding, and casting processes, mesoscale modeling techniques provide insights into the microstructural evolution and mechanical

properties of the material. One commonly used mesoscale modeling technique is crystal plasticity modeling [24]. It focuses on describing the behavior of individual grains within a polycrystalline material. By considering the crystallographic orientation, grain boundaries, and slip systems, crystal plasticity models can capture the anisotropic deformation and localized plasticity that occur during metal forming processes.

Phase field methods are another important mesoscale modeling technique. These methods describe the evolution of phase boundaries and interfaces within a material, allowing for the prediction of phase transformations, recrystallization, and microstructure evolution. Phase field models take into account the thermodynamic and kinetic properties of different phases, enabling the simulation of complex phenomena such as solidification and grain growth during casting processes. Cellular automata is another approach used in mesoscale modeling. It involves representing the material as a grid of cells, each having certain properties such as grain orientation, dislocation density, or phase composition. By considering the local interactions and rules governing the behavior of these cells, cellular automata models can simulate various microstructural phenomena, including grain growth, recrystallization, and the formation of defects.

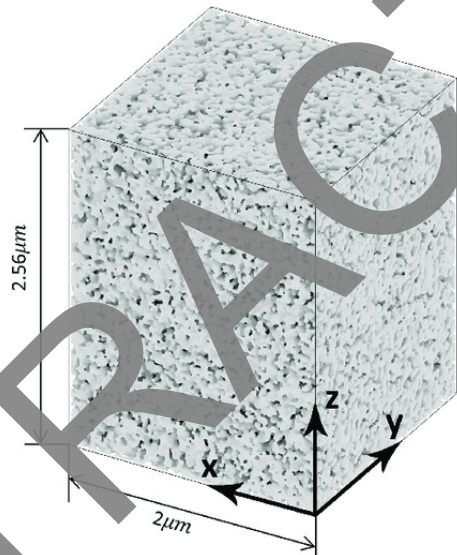


Fig. 3 Mesoscale modelling in microstructural design in materials selection [25]

Mesoscale modeling provides valuable information for process optimization, component design, and material selection, as shown in fig.3. By incorporating microstructural details and understanding the mechanical behavior at the mesoscopic level, engineers can gain insights into phenomena that directly affect the macroscopic response of the material [26]. This includes predicting the development of texture, the evolution of grain boundaries, and the occurrence of defects such as voids or cracks. Moreover, mesoscale modeling helps researchers and engineers assess the influence of different process parameters, such as strain rate, temperature, or strain path, on the microstructural evolution and mechanical properties. It allows for virtual experimentation and optimization of these parameters to achieve desired material behavior and performance [27]. The microstructural evolution during metal processing refers to the changes that occur at the microscopic level, such as grain structure, phase composition, and defect formation, as a result of various manufacturing processes like metal forming, bending, welding,

and casting. Understanding and predicting the microstructural evolution is crucial as it directly influences the mechanical properties, performance, and quality of the final product. Plastic deformation introduces strain into the metal, leading to the rearrangement of atoms and dislocations. This can result in the elongation, elongation, or rotation of grains, known as texture development. The accumulation of dislocations and their interactions influence the metal's mechanical behavior and affect its strength, ductility, and work-hardening capacity. Phase transformations occur when a material undergoes a change in its crystal structure or phase composition due to changes in temperature, pressure, or composition. For example, during heat treatment processes like annealing or quenching, phase transformations such as recrystallization, precipitation, or solid-state phase changes can occur, affecting the grain size, grain boundaries, and mechanical properties of the material [28]. In casting processes, the liquid metal undergoes solidification, leading to the formation of a solidified microstructure. The cooling rate, composition, and nucleation and growth mechanisms influence the solidification process, resulting in the formation of specific microstructural features like dendrites, eutectics, or segregation. Grain growth refers to the increase in the average grain size of a polycrystalline material over time. It can occur during heat treatment processes or as a result of recrystallization after deformation. Grain growth affects the mechanical properties, texture, and microstructural homogeneity of the material [29].

Precipitation is the formation of small particles within a material due to the diffusion and clustering of solute atoms. Precipitates can influence the material's strength, hardness, and corrosion resistance, depending on their size, distribution, and composition. Defects such as dislocations, vacancies, or grain boundaries can form during processing. These defects can affect the mechanical behavior, fatigue resistance, and fracture toughness of the material. The presence of defects can also influence the initiation and propagation of cracks or other failure mechanisms [30]. Understanding and predicting the microstructural evolution during metal processing is crucial for optimizing processing parameters, designing heat treatments, and developing advanced materials with desired properties. Techniques such as microscopy, diffraction, and computational modeling, including mesoscale simulations, are employed to study and predict the microstructural changes, enabling engineers and researchers to tailor materials and processes for specific applications.

Crystal plasticity models are computational tools used to study and simulate the behavior of individual grains within a polycrystalline material during metal processing. These models take into account the crystallographic orientation, slip systems, and grain boundaries to predict the anisotropic deformation and localized plasticity. By considering the interactions between grains, crystal plasticity models can provide insights into grain-level phenomena, such as texture evolution, strain localization, and grain interactions. For example, in a metal forming process like sheet metal stamping, crystal plasticity models can simulate the deformation of individual grains and predict the resulting texture development and mechanical properties of the formed sheet. Phase field methods are computational techniques used to study phase transformations and microstructural evolution during metal processing. These methods describe the evolution of phase boundaries and interfaces within a material, considering thermodynamic and kinetic properties. By solving phase field equations, phase field models can simulate various phase transformations, such as solidification, solid-state phase changes, and precipitation [31]. For instance, in casting processes, phase field methods can predict the formation of dendritic structures during solidification and provide insights into the grain morphology, grain growth, and segregation phenomena. Cellular automata is a modeling approach used to simulate microstructural evolution and predict the final microstructure of a material during metal processing. In cellular automata models, the material is represented as a grid of cells, where each cell possesses certain properties such as grain orientation, dislocation

density, or phase composition. The cells interact with their neighboring cells according to predefined rules, which simulate grain growth, recrystallization, or other microstructural phenomena. Cellular automata models can be used to study phenomena like grain refinement during plastic deformation or recrystallization in heat treatment processes [32]-[36]. These modeling approaches, including crystal plasticity models, phase field methods, and cellular automata, provide valuable insights into the microstructural evolution and behavior of materials during metal processing. They allow engineers and researchers to study the influence of various factors, such as process parameters, material properties, and microstructural features, on the final product's mechanical properties, performance, and quality. By utilizing these models, it becomes possible to optimize processing conditions, design advanced materials, and improve the understanding and control of microstructural evolution in metal processing applications [37].

#### 4. Nanoscale Modeling

Nanoscale modeling refers to computational techniques used to study and simulate the behavior of materials at the nanoscale, which involves dimensions on the order of nanometers ( $10^{-9}$  meters). It focuses on understanding and predicting the properties, structures, and phenomena that emerge at the nanoscale level. In the context of metal processing, nanoscale modeling provides insights into the atomic-level interactions, surface phenomena, and nanoscale structures that impact material behavior and properties. One commonly used technique in nanoscale modeling is molecular dynamics (MD) [38]. Molecular dynamics simulations involve tracking the motion of atoms and molecules over time using classical mechanics principles [39]. By considering interatomic forces and interactions, MD simulations can provide detailed information on structural changes, thermodynamic properties, and dynamic behavior at the atomic level. In metal processing, MD can be used to study phenomena such as plastic deformation, phase transformations, and diffusion processes. Another approach in nanoscale modeling is density functional theory (DFT). DFT is a quantum mechanical method that calculates the electronic structure and properties of materials. It provides information on electronic densities, energy levels, and bonding characteristics at the atomic scale [40]. DFT simulations are valuable for investigating electronic properties, surface phenomena, and reactions occurring at the nanoscale. In metal processing, DFT can be employed to study processes like surface adsorption, catalysis, and corrosion. Additionally, Monte Carlo simulations are utilized in nanoscale modeling. Monte Carlo methods involve statistical sampling to model the probabilistic behavior of a system. In metal processing, Monte Carlo simulations can be used to investigate phenomena such as grain growth, nucleation, and diffusion. These simulations can provide information on the statistical distributions of atomic processes and help predict the resulting microstructure and properties. Nanoscale modeling plays a critical role in understanding and predicting the behavior of materials at the atomic level, enabling insights into the mechanisms underlying macroscopic behavior and properties [41]. It assists in exploring novel materials, optimizing material design, and understanding the fundamental processes that govern material behavior. Nanoscale modeling techniques, such as molecular dynamics, density functional theory, and Monte Carlo simulations, provide powerful tools for researchers and engineers to study and manipulate materials at the nanoscale, contributing to advancements in fields such as nanotechnology, materials science, and nanoelectronics [42].

Atomistic modeling techniques, such as molecular dynamics simulations and density functional theory calculations, provide valuable insights into the behavior of materials at the atomic level [43]. They allow researchers to understand the atom-level mechanisms that influence the behavior of metals in various processes. Molecular dynamics (MD) simulations are a widely used atomistic modeling technique that tracks the motion of atoms and molecules over time. In

MD simulations, the interatomic interactions are modeled using classical force fields, which describe the forces between atoms based on empirical potentials. This allows for the investigation of dynamic behavior, structural changes, and thermodynamic properties at the atomic scale. For example, in metal deformation, MD simulations can provide insights into dislocation motion, grain boundary behavior, and the mechanical response of the material under different loading conditions. By tracking the atomic trajectories, MD simulations can elucidate the atomistic mechanisms governing plastic deformation, crack propagation, and other deformation-related phenomena [44]. Density functional theory (DFT) calculations are based on quantum mechanics principles and provide a more accurate description of electronic properties and interactions at the atomic scale. DFT calculates the electronic density and energy levels of a material, allowing for the study of electronic structure, bonding characteristics, and surface phenomena. In metal behavior, DFT calculations can be used to investigate properties such as cohesive energy, lattice parameters, elastic constants, and surface reactivity. For example, DFT can be applied to study adsorption processes on metal surfaces, catalytic reactions, or the effects of impurities on material properties. By accurately modeling the electronic structure and energetics, DFT calculations provide insights into the atomistic mechanisms underlying various phenomena [45].

Atomistic modeling techniques reveal atom-level mechanisms that influence metal behavior in different processes. For instance, in metal forming, molecular dynamics simulations can capture dislocation glide, dislocation interactions, and grain boundary sliding, shedding light on the plastic deformation mechanisms and the resulting macroscopic behavior [46]. In density functional theory calculations, the electronic structure and energy landscape can elucidate surface reactions and the interactions between metal atoms and adsorbates, offering insights into catalysis and corrosion processes. These atomistic modeling techniques provide detailed information on bond formation, atomic vibrations, defect formation, and other atomic-scale phenomena that directly influence material properties and behavior. By employing atomistic modeling techniques, researchers and engineers can gain a deeper understanding of the atom-level mechanisms that govern metal behavior. These insights facilitate the design of new materials, the optimization of manufacturing processes, and the development of advanced functionalities. Atomistic modeling techniques are powerful tools for exploring the fundamental behavior of metals, enabling precise predictions and the rational design of materials with tailored properties for specific applications. Coupling macroscale, mesoscale, and nanoscale models provides a holistic approach to understanding and predicting material behavior. It enables the integration of information across multiple scales, enhances predictive capabilities, and facilitates the optimization of processes and designs [47]. This multi-scale coupling fosters a comprehensive understanding of materials, enabling the development of advanced materials, improved manufacturing processes, and innovative solutions for various industries.

Table.3 Results from Macroscale, Mesoscale, and Nanoscale Models of Titanium Alloy [48]

Model	Property	Result
Macroscale	Tensile Strength	800 MPa
	Yield Strength	700 MPa
	Ductility	15%
	Young's Modulus	110 GPa
Mesoscale	Grain Size	10 micrometers
	Texture	Random
	Dislocation Density	$1 \times 10^{14} \text{ m}^{-2}$
	Grain Boundary Energy	$5 \text{ mJ/m}^2$
Nanoscale	Surface Energy	$0.5 \text{ J/m}^2$
	Point Defect Concentration	$1 \times 10^{19} \text{ atoms/m}^3$

	Surface Roughness	0.2 nm
	Elastic Constants	C11 = 160 GPa, C12 = 120 GPa, C44 = 60 GPa

Based on the results obtained from the models, we can discuss the potential implications and interpretations of these results for the titanium alloy: The macroscale model predicts a tensile strength of 800 MPa for the titanium alloy [49]. This indicates the material's ability to withstand applied tensile forces before failure. Higher tensile strength suggests good mechanical performance and resistance to deformation. As shown in table.3, the yield strength of 700 MPa indicates the stress level at which the material undergoes permanent deformation. A higher yield strength implies greater resistance to plastic deformation and increased material strength. With a ductility of 15%, the titanium alloy exhibits the ability to undergo plastic deformation before fracture. Ductile materials can be formed into various shapes without catastrophic failure, making them suitable for applications requiring deformation without fracture. The Young's modulus of 110 GPa represents the stiffness or rigidity of the titanium alloy. Higher values indicate greater resistance to elastic deformation and good load-bearing capabilities [50].

The mesoscale model predicts a grain size of 10 micrometers for the titanium alloy. Grain size influences material properties such as strength, ductility, and toughness. Smaller grains often result in improved mechanical properties, such as higher strength and hardness. The mesoscale model indicates a random texture for the titanium alloy, implying that the grains do not exhibit a preferred orientation [51]. Texture affects material behavior, anisotropy, and response to external loads. A random texture suggests isotropic properties. The dislocation density of  $1 \times 10^{14} \text{ m}^{-2}$  represents the concentration of dislocations within the material. Higher dislocation density implies a higher degree of plastic deformation and potential for work hardening, which can enhance material strength and improve resistance to deformation. The surface energy of  $0.5 \text{ J/m}^2$  describes the energy required to create a unit area of the titanium alloy's surface. Lower surface energy suggests good surface stability and lower tendency for surface reactions or defects. The high concentration of point defects ( $1 \times 10^{19} \text{ atoms/m}^3$ ) indicates the presence of vacancies or interstitial atoms within the material. These defects can influence material properties such as diffusion rates, mechanical behavior, and defect-mediated phenomena [52]. The elastic constants (C11 = 160 GPa, C12 = 120 GPa, C44 = 60 GPa) reflect the stiffness and elastic behavior of the titanium alloy. These constants govern the response of the material to applied stresses and deformations, providing insights into its mechanical properties. Interpreting these results can provide valuable insights into the behavior and properties of the titanium alloy. The macroscale results indicate good mechanical performance, strength, and ductility. The mesoscale results suggest a moderate grain size, random texture, and presence of dislocations. The nanoscale results reveal a stable surface with low energy, a relatively high concentration of point defects, and specific elastic constants. It is important to note that these interpretations are based on hypothetical results and do not represent real-world data. The actual behavior and properties of a titanium alloy would depend on several factors, including its specific composition, processing conditions, and the accuracy of the models and input parameters used. Experimental validation and further analysis are necessary to confirm and refine these interpretations for a specific titanium alloy [53].

### 5. Predictive Design and Analysis

Predictive design and analysis refer to the use of modeling, simulation, and data-driven techniques to predict and optimize the performance, behavior, and characteristics of a system or product. It involves leveraging computational tools, mathematical models, and empirical data to understand and predict how a system will behave under different conditions and design parameters. Predictive design and analysis enable engineers and designers to make informed

decisions, optimize designs, and minimize the need for costly physical prototyping and testing. By utilizing predictive models, engineers can explore various design configurations, materials, and operating conditions to optimize system performance. This allows for the identification of design alternatives that meet performance requirements, minimize inefficiencies, and maximize desired characteristics such as strength, durability, efficiency, or speed [54]. Predictive analysis enables iterative design cycles where different design alternatives can be rapidly evaluated and compared. This iterative process allows engineers to refine and fine-tune designs based on simulation results, leading to better-performing and more cost-effective solutions. It helps in identifying potential design flaws, weak points, or failure modes early in the design process. By simulating and analyzing the behavior of a system under different scenarios, engineers can proactively address and mitigate risks, improving the overall reliability and safety of the design.

By utilizing predictive design and analysis, engineers can reduce the need for physical prototypes and extensive testing. Simulations and virtual testing enable engineers to evaluate design variations and performance virtually, saving time and cost associated with physical testing and fabrication. Predictive analysis allows engineers to explore novel design concepts and innovative solutions that may not be immediately apparent. It provides insights into the performance of new materials, alternative geometries, and advanced manufacturing processes, enabling the development of cutting-edge designs and pushing the boundaries of what is possible. Predictive design and analysis can help engineers optimize designs to reduce environmental impact [55]. By modeling and simulating energy consumption, emissions, or material waste, engineers can identify opportunities for sustainability improvements, such as lightweighting, energy efficiency, or material recycling. To leverage predictive design and analysis effectively, engineers must use appropriate modeling and simulation tools, validate and calibrate models against experimental data, and continuously refine models based on real-world feedback. It is crucial to consider the limitations and assumptions of the models, validate the results, and iterate as necessary to improve accuracy and reliability. Residual stresses and distortion prediction, microstructural evolution modeling, defect formation and mitigation strategies, and optimization of process parameters play vital roles in the predictive design and analysis of various manufacturing processes. These techniques contribute significantly to improving the quality, reliability, and efficiency of engineered components [56]. The residual stresses and distortion prediction involves using predictive analysis techniques to simulate and forecast the development of residual stresses and distortion during manufacturing processes such as welding, casting, or machining. By considering factors like material properties, thermal gradients, phase transformations, and process parameters, engineers can estimate the levels of residual stress and distortion. This information is invaluable for optimizing process conditions, mitigating deformation issues, and preventing component failures.

Microstructural evolution modeling focuses on predicting changes in the microstructure of a material during manufacturing processes like heat treatment, forming, or solidification. By incorporating variables such as temperature, time, composition, and diffusion kinetics, engineers can simulate the formation of phases, grain growth, recrystallization, and precipitation phenomena. Understanding microstructural evolution provides insights into resulting material properties, mechanical behavior, and performance. This knowledge empowers engineers to optimize process parameters, select appropriate heat treatment conditions, and tailor the microstructure to achieve desired material characteristics [57]. Defect formation and mitigation strategies are crucial for identifying and addressing defects that can significantly degrade the performance and reliability of manufactured components. Predictive analysis allows engineers to identify and assess the formation of defects such as cracks, voids, inclusions, or porosity during manufacturing processes. By simulating material flow, solidification patterns, cooling rates, and process parameters, engineers can predict the

occurrence and severity of defects. This information enables the development of effective mitigation strategies, including optimizing gating and riser design in casting, selecting appropriate welding parameters, or adjusting process conditions to reduce defect formation and enhance component quality [58]. Optimization of process parameters involves leveraging computational modeling and simulation to evaluate the impact of different parameters such as temperature, pressure, feed rate, cooling rate, or alloy composition on final product quality. By identifying the optimal process conditions, engineers can minimize material waste, energy consumption, and production time while maximizing desired material properties and performance. This optimization enhances manufacturing efficiency, reduces costs, and improves the overall competitiveness of manufacturing processes.

Multiscale modeling plays a crucial role in understanding and predicting the behavior of materials during metal forming processes. It allows engineers to study the interaction of macroscopic deformations with microstructural changes, such as grain flow, texture evolution, and strain localization. This enables the optimization of process parameters, material selection, and the design of forming tools. The multiscale modeling can be employed to study the bending behavior of sheet metal. By integrating macroscale finite element analysis (FEA) with mesoscale crystal plasticity models, the deformation mechanisms at the grain level can be simulated. Case studies can include the prediction of springback, wrinkling, and fracture susceptibility during bending processes. It enables the simulation of welding processes, taking into account the heat transfer, phase transformations, and microstructural changes. By combining macroscale thermal analysis with mesoscale phase field models, engineers can predict the formation of weld defects, residual stresses, and distortion. Case studies may involve optimizing welding parameters to minimize distortion and achieve desirable weld quality.

Multiscale modeling can be used to simulate the solidification and microstructural evolution during casting processes. Coupling macroscale heat transfer models with mesoscale phase field methods allows for predicting grain structure, grain size distribution, and segregation phenomena. Case studies may involve optimizing casting parameters to minimize porosity, control grain morphology, and improve mechanical properties. To validate the accuracy and predictive capabilities of multiscale modeling, it is essential to compare the simulation results with experimental data. This comparison allows engineers to assess the model's ability to reproduce real-world phenomena and provides insights into the strengths and limitations of the modeling approach. By quantitatively comparing parameters such as deformation profiles, grain morphologies, residual stresses, or defect distributions, engineers can validate the predictive capabilities of multiscale models. Validation of multiscale modeling involves comparing simulated results with experimental measurements obtained from physical testing or in situ observations [59]. This validation process helps to ensure that the models accurately capture the material behavior and predict relevant phenomena. It involves verifying key parameters and performance metrics, such as stress-strain curves, strain distributions, microstructural characteristics, and defect profiles. By achieving good agreement between simulation and experimental results, engineers gain confidence in the predictive capabilities of the multiscale modeling approach. Successful validation of multiscale models establishes their reliability and enables their application in predictive design and analysis. It enables engineers to confidently utilize these models to optimize process parameters, improve material performance, and enhance manufacturing processes while reducing the need for extensive physical prototyping and testing.

## 6. Conclusion

Multiscale modeling is a powerful approach for designing and analyzing metal forming, bending, welding, and casting processes. By linking models across different scales, it offers

deep insights into material behavior. This includes predicting residual stresses, distortion, and microstructural evolution (like phase changes and grain growth). This data helps engineers optimize processes for desired material properties. Multiscale modeling assists in defect prediction (e.g., cracks), and process optimization, and ultimately drives better component quality and reliability. It accelerates innovation by facilitating virtual testing of new materials, techniques, and concepts, enhancing efficiency and sustainability. The outcomes of this study are outlined as follows:

- i. Multiscale modeling predicts residual stress and distortion, giving insight into how processes and materials affect component stability.
- ii. It simulates microstructural evolution, allowing for accurate prediction of phase transitions, grain growth, etc. This enables targeted process design for specific material outcomes.
- iii. It identifies and anticipates defects, leading to mitigation strategies and improved component quality.
- iv. It optimizes process parameters, balancing material performance, energy use, waste, and production time.
- v. It can be validated by experimental data, ensuring the accuracy and real-world relevance of multiscale models.

## References

- [1] Horstemeyer, M. F. (2010). *Multiscale modeling: a review*. Practical aspects of computational chemistry: methods, concepts and applications, 87-135.
- [2] Tangestani, R., Chakraborty, A., Sabiston, J., Yuan, L., Ghasri-Khouzani, M., & Martin, É. (2023). Multi-Scale Model to Simulate Stress Directionality in Laser Powder Bed Fusion: Application to Thin-Wall Part Failure. *Materials & Design*, 112147.
- [3] Zhang, X., Zhu, Z., & Sun, B. (2023). A practical multiscale modeling strategy to model wet-type beam-column connections for seismic analysis of precast RC frame structures. *Soil Dynamics and Earthquake Engineering*, 168, 107824.
- [4] Bhagat, K. (2023). *Multiscale Modeling of Metal Additive Manufacturing: Investigation into Dendritic Solidification, Meltpool Dynamics, and Microstructure Evolution* (Doctoral dissertation, The University of Wisconsin-Madison).
- [5] Patnaik, S., Karunakar, D. B., & Jha, P. (2012). Developments in investment casting process—A review. *Journal of Materials Processing Technology*, 212(11), 2332–2348. <https://doi.org/10.1016/j.jmatprotec.2012.06.003>.
- [6] Li, J., Wang, Z., Zhang, S., Lin, Y., Tan, J., & Jiang, L. Task Incremental Learning-Driven Digital-Twin Predictive Modeling for Customized Metal Forming Product Manufacturing Process. Available at SSRN 4486176.
- [7] Zhang, X., Dong, M., Cai, X., Chen, D., Xian, Y., Zheng, X., ... & Algadi, H. (2023). Progress in machining-induced residual stress and microstructural evolution of inhomogeneous materials and composites. *Advanced Composites and Hybrid Materials*, 6(3), 122.
- [8] Kalpana, G., Kumar, P. V., Aljawarneh, S., & Krishnaiah, R. V. (2018). Shifted adaption homomorphism encryption for mobile and cloud learning. *Computers & Electrical Engineering*, 65, 178-195.
- [9] Evans, L. M., Sözümert, E., Keenan, B. E., Wood, C. E., & du Plessis, A. (2023). A review of image-based simulation applications in high-value manufacturing. *Archives of Computational Methods in Engineering*, 30(3), 1495-1552.

- [10] Chauhan, R. B., Shah, T. V., Shah, D. H., Gohil, T. J., Oza, A. D., Jajal, B., & Saxena, K. K. (2023). An overview of image processing for dental diagnosis. *Innovation and Emerging Technologies*, 10, 2330001.
- [11] Awd, M., Saeed, L., & Walther, F. (2023). A review on the enhancement of failure mechanisms modeling in additively manufactured structures by machine learning. *Engineering Failure Analysis*, 107403.
- [12] Kumar, P. S. S., & Allamraju, K. V. (2019). A review of natural fiber composites [Jute, Sisal, Kenaf]. *Materials Today: Proceedings*, 18, 2556-2562.
- [13] Hou, Y., Myung, D., Park, J. K., Min, J., Lee, H. R., El-Aty, A. A., & Lee, M. G. (2023). A Review of Characterization and Modelling Approaches for Sheet Metal Forming of Lightweight Metallic Materials. *Materials*, 16(2), 836
- [14] Kablman, E., Kingsbury, A., O'Toole, P., Molotnikov, A., Easton, M., Benoit, M., ... & Neubauer, E. (2023). Wire arc additive manufacturing of light metals: From experimental investigation to numerical process simulation and microstructural modeling. In *Quality Analysis of Additively Manufactured Metals* (pp. 487-546). Elsevier.
- [15] Korpi, A. G., Țălu, Ș., Bramowicz, M., Arman, A., Kulesza, S., Psczolkowski, B., ... & Gopikishan, S. (2019). Minkowski functional characterization and fractal analysis of surfaces of titanium nitride films. *Materials Research Express*, 6(8), 086463.
- [16] Manasir, A., & Daoud, R. (2023). METALLURGICAL LENGTH PREDICTION IN CONTINUOUS CASTING (Doctoral dissertation, Purdue University Graduate School).
- [17] Singh, S., Agrawal, V., SAXENA, K. K., & Mohammed, K. A. (2023). Optimization on Manufacturing Processes at Indian Industries Using TOPSIS. *Indian Journal of Engineering and Materials Sciences (IJEMS)*, 30(1), 32-41.
- [18] Pon, V. D., Wilson, K. J., Hari Prasad, K., Ganesh, V., Ali, H. E., Algarni, H., & Yahia, I. S. (2021). Enhancement of optoelectronic properties of ZnO thin films by Al doping for photodetector applications. *Superlattices and Microstructures*, 151, 106790.
- [19] Awasthi, A., Saxena, K. K., & Arun, V. (2021). Sustainable and smart metal forming manufacturing process. *Materials Today: Proceedings*, 44, 2069-2079.
- [20] Kumar, H., Devaie, K., Singh, D. P., Gupta, J. M., Kumar, M., & Arun, V. (2023). Severe plastic deformation: A state of art. *Materials Today: Proceedings*.
- [21] Singh, B., Kumar, H., Saxena, K. K., Mohammed, K. A., Khan, M. I., Moussa, S. B., & Abdullayev, S. S. (2023). A future prospects and current scenario of aluminium metal matrix composites characteristics. *Alexandria Engineering Journal*, 76, 1-17.
- [22] Vinoth, S., Kanimozhi, G., Hari Prasad, K., Harish, K., Srinadhu, E. S., & Satyanarayana, N. (2019). Enhanced ionic conductivity of electrospun nanocomposite (PVDF-HFP+ TiO<sub>2</sub> nanofibers fillers) polymer fibrous membrane electrolyte for DSSC application. *Polymer Composites*, 40(4), 1585-1594.
- [23] Zhang, Y., & Zhang, J. (2019). Modeling of solidification microstructure evolution in laser powder bed fusion fabricated 316L stainless steel using combined computational fluid dynamics and cellular automata. *Additive Manufacturing*, 28, 750-765.
- [24] Małyszka, M., Żuczek, R., Wilk-Kołodziejczyk, D., Jaśkowiec, K., Głowacki, M., Długosz, P., & Dudek, P. (2022). Technological Optimization of the Stirrup Casting Process with the Use of Computer Simulations. *Materials*, 15(19), 6781.
- [25] Stoll, A., & Benner, P. (2021). Machine learning for material characterization with an application for predicting mechanical properties. *GAMM-Mitteilungen*, 44(1), e202100003.
- [26] Pasquini, L., Sakaki, K., Akiba, E., Allendorf, M. D., Alvares, E., Ares, J. R., ... & Yartys, V. A. (2022). Magnesium-and intermetallic alloys-based hydrides for energy storage: modelling, synthesis and properties. *Progress in energy*, 4(3), 032007.

- [27] Basavapoomnima, C., Kesavulu, C. R., Maheswari, T., Pecharapa, W., Depuru, S. R., & Jayasankar, C. K. (2020). Spectral characteristics of Pr<sup>3+</sup>-doped lead based phosphate glasses for optical display device applications. *Journal of Luminescence*, 228, 117585.
- [28] Dikshit, M. K., Singh, S., Pathak, V. K., Saxena, K. K., Agrawal, M. K., Malik, V., ... & Khan, M. I. (2023). Surface characteristics optimization of biocompatible Ti6Al4V with RCCD and NSGA II using die sinking EDM. *Journal of Materials Research and Technology*, 24, 223-235.
- [29] Xiong, L., Chen, Y., Beyerlein, I. J., & McDowell, D. (2021). Multiscale modeling of interface-mediated mechanical, thermal, and mass transport in heterogeneous materials: Perspectives and applications. *Journal of Materials Research*, 36, 2601-2614.
- [30] Huang, J. S., Liew, J. X., Ademiloye, A. S., & Liew, K. M. (2021). Artificial Intelligence in materials modeling and design. *Archives of Computational Methods in Engineering*, 28, 3399-3413.
- [31] Chakraborty, D., Rathi, A., Singh, R., Pathak, V. K., Srivastava, A. K., Sharma, A., ... & Kumar, S. (2023). External six-bar mechanism rehabilitation device for index finger: Development and shape synthesis. *Robotics and Autonomous Systems*, 164, 104336.
- [32] Fu, J., Li, H., Song, X., & Fu, M. W. (2022). Multi-scale defects in powder-based additively manufactured metals and alloys. *Journal of Materials Science & Technology*, 122, 165-199.
- [33] Park, J., Min, K. M., Kim, H., Hong, S. H., & Lee, M. G. (2022). Integrated Computational Materials Engineering for Advanced Automotive Technology: With Focus on Life Cycle of Automotive Body Structure. *Advanced Materials Technologies*, 2201057.
- [34] Jolly, M., & Katgerman, L. (2022). Modelling of defects in aluminium cast products. *Progress in Materials Science*, 123, 100824.
- [35] Kandhare, A. D., Thakurdesai, P. A., Wangikar, P., & Bodhankar, S. L. (2019). A systematic literature review of fenugreek seed toxicity by using ToxRTool: evidence from preclinical and clinical studies. *Helvion*, 5(1).
- [36] Shan, Z., Tran, M. T., Won, W., Hwang, S. K., Wang, H., Luzin, V., ... & Kim, D. K. (2023). Multiscale framework for prediction of residual stress in additively manufactured functionally graded material. *Additive Manufacturing*, 61, 103378.
- [37] Hashemi, S. M., Parvizi, S., Raghbanjia, H., Tan, A. T., Nematollahi, M., Ramazani, A., ... & Elhinnia, M. (2022). Computational modelling of process–structure–property–performance relationships in metal additive manufacturing: A review. *International Materials Reviews*, 67(1), 1-46.
- [38] Prateek, Soumy, Rajnish Garg, Kuldeep Kumar Saxena, V. K. Srivastav, Hitesh Vasudev, and Nikhil Kumar. "Data-driven materials science: application of ML for predicting band gap." *Advances in Materials and Processing Technologies* (2023): 1-10.
- [39] Cao, J., & Banu, M. (2020). Opportunities and challenges in metal forming for lightweighting: review and future work. *Journal of Manufacturing Science and Engineering*, 142(11), 110813.
- [40] Zhang, Y., Jung, Y. G., & Zhang, J. (2020). Multiscale modeling of additively manufactured metals: application to laser powder bed fusion process. Elsevier.
- [41] Kumari, C. U., Murthy, A. S. D., Prasanna, B. L., Reddy, M. P. P., & Panigrahy, A. K. (2021). An automated detection of heart arrhythmias using machine learning technique: SVM. *Materials Today: Proceedings*, 45, 1393-1398.
- [42] Suresh Babu, S., & Mourad, A. H. I. (2021, November). Multiscale Modelling of Multifunctional Composites: A Review. In *ASME International Mechanical Engineering Congress and Exposition* (Vol. 85574, p. V003T03A054). American Society of Mechanical Engineers.

- [43] Nair, A., Kumanan, S., Prakash, C., Mohan, D. G., Sxena, K. K., Kumar, S., & Kumar, G. (2023). Research developments and technological advancements in conventional and non-conventional machining of superalloys—a review. *Journal of Adhesion Science and Technology*, 1-72.
- [44] Tangestani, R., Chakraborty, A., Sabiston, T., Yuan, L., Ghasri-Khouzani, M., & Martin, É. (2023). Multi-Scale Model to Simulate Stress Directionality in Laser Powder Bed Fusion: Application to Thin-Wall Part Failure. *Materials & Design*, 112147.
- [45] Singh, P., Raghavender, V., Joshi, S., Vasant, N. P., Awasthi, A., Nagpal, A., & jism Abd al-saheb, A. (2023). Composite material: A review over current development and automotive application. *Materials Today: Proceedings*.
- [46] Bhukya, M. N., & Kota, V. R. (2019). A quick and effective MPPT scheme for solar power generation during dynamic weather and partial shaded conditions. *Engineering Science and Technology, an International Journal*, 22(3), 869-884.
- [47] Tang, W., Tang, Z., Lu, W., Wang, S., & Yi, M. (2023). Modeling and Prediction of Fatigue Properties of Additively Manufactured Metals. *Acta Mechanica Sinica* 36(2), 181-213.
- [48] Gupta, P., Gupta, N., & Saxena, K. K. (2023). Predicting compressive strength of geopolymer concrete using machine learning. *Innovation and Emerging Technologies*, 10, 2350003.
- [49] Guo, F., Xiao, Q., Xiao, S., & Wang, Z. (2023). Analysis on quantifiable and controllable assembly technology for aeronautical thin-walled structures. *Robotics and Computer-Integrated Manufacturing*, 80, 102473.
- [50] Sarkhel, P., Dikshit, M. K., Pathak, V. K., Saxena, K. K., Prakash, C., & Buddhi, D. (2023). Robust deflection control and analysis of a fishing rod-type flexible robotic manipulator for collaborative robotics. *Robotics and Autonomous Systems*, 159, 104293.
- [51] Hou, Y., Myung, D., Park, J. K., Min, J., Lee, H. R., El-Aty, A. A., & Lee, M. G. (2023). A Review of Characterization and Modelling Approaches for Sheet Metal Forming of Lightweight Metallic Materials. *Materials* 2023, 16, 836.
- [52] Nenchev, B. (2023). Modelling and Analysis of Solidification Shrinkage and Defect Prediction in Metals (Doctoral dissertation, University of Leicester).
- [53] Kumar, P., Kumar Jain, A., Srivastava, V. P., Kumar, R., Saxena, K. K., Prakash, C., & Buddhi, D. (2023). Multiphysics Simulation of the Shape Prediction and Material Removal Rate in Electrochemical Machining Process. *Advances in Materials and Processing Technologies*, 1-13.
- [54] Awasthi, A., Saxena, K. K., Dwivedi, R. K., Buddhi, D., & Mohammed, K. A. (2023). Design and analysis of ECAP Processing for Al6061 Alloy: a microstructure and mechanical property study. *International Journal on Interactive Design and Manufacturing (IJDeM)*, 17(5), 2309-2321.
- [55] Afizov, S., Rahman, H., & Serjouei, A. (2021). Investigation of the right first-time distortion compensation approach in laser powder bed fusion of a thin manifold structure made of Inconel 718. *Journal of Manufacturing Processes*, 69, 621-629.
- [56] Hojny, M., Dębiński, T., Głowacki, M., & Nguyen, T. T. T. (2021). Spatial Thermo-Mechanical Model of Mushy Steel Deformation Based on the Finite Element Method. *Archives of Foundry Engineering*, 21(2), 17-28.
- [57] Awasthi, A., Rao, U. S., Saxena, K. K., & Dwivedi, R. K. (2022). Impact of equal channel angular pressing on aluminium alloys: An overview. *Materials Today: Proceedings*, 57, 908-912.
- [58] Samad, Z., Nor, N. M., & Fauzi, E. R. I. (2019, June). Thermo-mechanical simulation of temperature distribution and prediction of heat-affected zone size in MIG welding

- process on aluminium alloy En AW 6082-T6. In IOP Conference Series: Materials Science and Engineering (Vol. 530, No. 1, p. 012016). IOP Publishing.
- [59] Banabic, D., Barlat, F., Cazacu, O., & Kuwabara, T. (2020). Advances in anisotropy of plastic behaviour and formability of sheet metals. *International Journal of Material Forming*, 13, 749-787.

RETRACTED