

Biomimetic Materials for Regenerative Medicine: Design and Applications

Toshit jain^{1*}, Singavarapu Sujani², Navdeep Singh³, Sharif Fadhil Abood Al-Alawachi⁴, Asha V⁵, Ankit Meheta⁶

¹Department of Mechanical Engineering, GLA University, Mathura, UP, India

²Department of Physics, Institute of Aeronautical Engineering, Hyderabad, Telangana

³Lovely Professional University, Phagwara, India

⁴Hilla University College, Babylon, Iraq

⁵Department of Applied Sciences, New Horizon College of Engineering, Bangalore, India

⁶Lloyd Institute of Engineering & Technology, Greater Noida, Uttar Pradesh 201306

*Corresponding author: Toshit.jain@gla.ac.in

Abstract: Bio mimetic materials have shown great potential for tissue engineering and regenerative medicine as they can mimic the natural extracellular matrix (ECM) of tissues and organs. The ECM is a complex network of proteins, glycosaminoglycans, and other bio molecules that provide structural support to cells and regulate their behaviour. Bio mimetic materials can be designed to replicate the biochemical and biophysical properties of the ECM, creating an environment that promotes cell adhesion, proliferation, differentiation, and tissue regeneration. There are different classes of bio mimetic materials, including natural and synthetic polymers, as well as inorganic materials such as Hydroxyapatite and ceramics. Polymers made from nature that assist with cell growth and differentiation, like collagen, which is fibrin, and hyaluronic acid, for instance, have been utilised extensively in tissue engineering. Both the physical and chemical characteristics of synthetic polymers, which include polyethylene glycol, also known as PEG, and poly lactic acid (PLA), can be modified to satisfy the needs of different tissues. Inorganic materials such as hydroxyapatite and ceramics can mimic the mineralized ECM of bone and tooth tissues, providing a scaffold for cell attachment and mineral deposition. Recent advances in the field of bio mimetic materials include the use of nanotechnology and 3D printing to create complex structures with precise control over their size, shape, and mechanical properties. Nanoparticles and nano fibers can be incorporated into bio mimetic materials to enhance their mechanical strength, surface area, and bioactivity. 3D printing can be used to create customized scaffolds that match the shape of the target tissue, allowing for more effective tissue regeneration.

Keywords: Bio mimetic materials, regenerative medicine, extracellular matrix, cell adhesion, cell proliferation, cell differentiation, tissue regeneration.

Introduction

The extracellular matrix, or ECM, found in the organs and tissues is a single instance of a biomimetic material, which is an artificial product that matches the characteristics of an authentic biological substance. These materials can be designed to replicate the biochemical and biophysical properties of the ECM, creating an environment that promotes cell adhesion, proliferation, differentiation, and tissue regeneration. Biomimetic materials have great potential for regenerative medicine because they can be tailored to match the specific properties of different tissues and organs, allowing for more effective repair and regeneration. Biomimetic materials can be made from a variety of natural and synthetic polymers, as well as inorganic materials such as hydroxyapatite and ceramics. Inorganic materials such as hydroxyapatite and ceramics can mimic the mineralized ECM of bone and tooth tissues, providing a scaffold for cell attachment and mineral deposition [1–3]

Biomimetic materials have emerged as promising candidates for tissue engineering and regenerative medicine applications. According to Zhang et al. "the ideal scaffold for tissue engineering should mimic the composition, structure, and mechanical properties of the native extracellular matrix (ECM)". Mimicking the ECM can improve cell attachment, proliferation, and differentiation, leading to successful tissue regeneration. Natural polymers, such as collagen, fibrin, hyaluronic acid, and chitosan, have been extensively studied as biomimetic materials due to their biocompatibility and

ability to mimic the native ECM. According to Muzzarelli et al. chitosan "is highly attractive for tissue engineering" due to its biocompatibility, biodegradability, and antimicrobial properties. Chitosan-based scaffolds have been shown to promote cell proliferation and differentiation, as well as new bone formation in vivo [4–6].

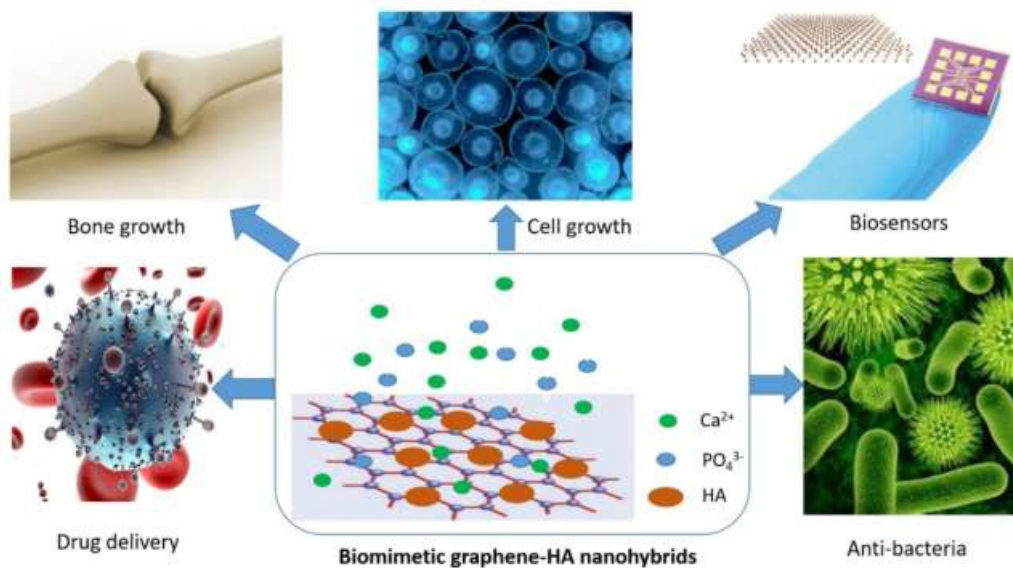


Fig.1 Different applications of bio mimetic based Hydroxyapatite [7]

Synthetic polymers have also been investigated for their potential as biomimetic materials. For example, polyethylene glycol (PEG) has been used to create hydrogels for soft tissue engineering. According to Nguyen et al. "PEG-based hydrogels can be designed to mimic the mechanical properties of soft tissues and provide a highly tunable and controllable microenvironment for cell culture". PEG-based hydrogels have been shown to promote cell proliferation and differentiation, as well as drug delivery for tissue regeneration [8–10].

Inorganic materials, such as hydroxyapatite and ceramics, have also been explored as biomimetic materials. Hydroxyapatite has been widely used for bone regeneration due to its similarity to the mineralized ECM of bone tissue. According to Bose and Tarafder, "hydroxyapatite-based scaffolds can provide a suitable environment for bone regeneration by promoting cell attachment, proliferation, and differentiation, as well as mineral deposition". Ceramics have also been investigated for dental and orthopedic implants due to their biocompatibility and mechanical properties [11–13].

Biomimetic materials can be used to create scaffolds for tissue engineering, drug delivery systems, and diagnostic tools [14]. They can also be combined with other technologies such as nanotechnology and 3D printing to create more complex structures that better mimics the natural ECM of tissues and organs. By mimicking the natural properties of biological materials, biomimetic materials offer a promising approach for regenerative medicine with the potential to revolutionize the treatment of injuries, diseases, and organ failure [15–18].

Mimicking the extracellular matrix (ECM) is a crucial aspect of tissue engineering because the ECM plays a critical role in regulating cell behavior and tissue development. The ECM is a complex network of proteins, glycosaminoglycans, and other biomolecules that provide structural support to cells and regulate their behavior. It serves as a signaling interface between cells and their environment, influencing cell adhesion, proliferation, differentiation, and migration. In tissue engineering, the ECM acts as a scaffold for cells to grow and organize into functional tissues. By mimicking the biochemical and biophysical properties of the ECM, biomimetic materials can create cells to regenerate and repair damaged tissues. This approach allows for the creation of tissue-engineered constructs that closely resemble the natural ECM, promoting better integration with the host tissue and improving the overall effectiveness of tissue regeneration. Furthermore, the ECM varies between different tissues and organs, and each type of tissue has a unique set of properties that need to be replicated in order to achieve successful tissue regeneration. Therefore, biomimetic materials can be

tailored to match the specific properties of different tissues and organs, such as stiffness, porosity, and surface topography. This enables the creation of tissue-engineered constructs that are more biologically relevant and functional, allowing for better tissue regeneration and repair [19–21].

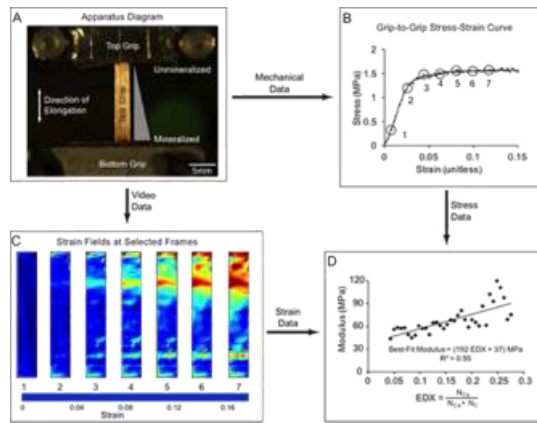


Fig.2 Development of Tissue regeneration [22]

There are several classes of biomimetic materials that have been developed for regenerative medicine. These include natural polymers, synthetic polymers, and inorganic materials [23]. Each class of biomimetic materials has its own advantages and disadvantages, and can be tailored to match the specific properties of different tissues and organs [24].

➤ **Natural polymers:**

Natural polymers are derived from biological sources such as plants and animals, and include collagen, fibrin, and hyaluronic acid. They are biocompatible, biodegradable, and can be designed to match the specific properties of different tissues. For example, collagen is the main component of the ECM in many tissues, including skin, bone, and cartilage, and can be used to create scaffolds for tissue regeneration [25]. Fibrin is a natural protein that forms blood clots and can be used to promote wound healing, while hyaluronic acid is a component of joint fluid and can be used to treat osteoarthritis [26,27].

Some examples of natural polymers used in regenerative medicine include:

Collagen is the most abundant protein in the ECM of connective tissues such as skin, bone, and cartilage. It provides structural support to cells and regulates cell behavior. Collagen can be isolated from animal sources such as bovine, porcine, and human skin, and can be processed into various forms such as hydrogels, fibers, and sheets. Collagen-based scaffolds have been used in tissue engineering applications, including skin regeneration, bone regeneration, and cartilage repair. Fibrin is a natural protein that is involved in blood clotting. It can be isolated from blood plasma and processed into various forms such as hydrogels, fibers, and films. Fibrin-based materials have been used in wound healing applications due to their ability to promote cell migration and tissue regeneration. Hyaluronic acid is a glycosaminoglycan that is present in many tissues such as joint fluid and cartilage. It has a high capacity for water retention and provides lubrication and shock absorption to tissues. Hyaluronic acid-based materials have been used in tissue engineering applications, including cartilage regeneration and wound healing. Chitosan is a polysaccharide derived from chitin, a natural polymer found in the exoskeletons of crustaceans. It has been used in regenerative medicine due to its biocompatibility, biodegradability, and antimicrobial properties. Chitosan-based materials have been used in tissue engineering applications, including bone regeneration and wound healing [28–30].

Natural polymers are derived from biological sources and are generally biocompatible, meaning they are well-tolerated by the body and do not cause an immune response. It can be degraded and metabolized by the body's natural processes, eliminating the need for surgical removal and reducing the risk of long-term complications. They have similar structural and mechanical properties to the native ECM, allowing them to support cell attachment, proliferation, and differentiation.

Natural polymers are often weaker than synthetic materials and may not provide sufficient mechanical support for certain tissue engineering applications. It may exhibit batch-to-batch variability in their composition, making it difficult to ensure consistent quality and performance. Although rare, natural polymers may cause an immune response in some patients, leading to inflammation and tissue rejection.

Despite these limitations, natural polymers have been widely used in tissue engineering and regenerative medicine, particularly in applications such as skin and cartilage repair. For example, collagen-based scaffolds have been used for wound healing and tissue regeneration due to their ability to promote cell attachment and proliferation [31,32]. Similarly, hyaluronic acid-based hydrogels have been used for cartilage repair due to their ability to mimic the viscoelastic properties of native cartilage.

➤ **Synthetic polymers:**

Synthetic polymers are created in the laboratory and can be designed with specific mechanical and chemical properties. They include polyethylene glycol (PEG), polylactic acid (PLA), and polyglycolic acid (PGA), among others. Synthetic polymers are highly customizable, biocompatible, and can be designed to mimic the properties of natural polymers or create new properties altogether [33]. For example, PEG can be used to create hydrogels that mimic the soft tissue of the brain or to deliver drugs to specific cells or tissues, while PLA can be used to create scaffolds for bone regeneration [34].

Polyethylene glycol (PEG) and polylactic acid (PLA) are two commonly used synthetic polymers in tissue engineering. PEG is a water-soluble, biocompatible polymer that can be easily modified to incorporate various biological molecules. PEG has a high degree of hydrophilicity and can be easily crosslinked to form hydrogels, making it useful for applications such as drug delivery and tissue engineering scaffolds. PEG-based hydrogels have been used for a variety of tissue engineering applications, including cartilage and nerve regeneration. However, PEG may exhibit some cytotoxicity at high concentrations, and its degradation products can be potentially harmful to the body.

PLA can be processed into various forms, such as films, fibers, and scaffolds, making it a versatile material for tissue engineering applications. PLA-based scaffolds have been used for bone regeneration, and PLA-based films have been used for wound healing. However, PLA has some limitations, including low mechanical strength and brittleness, which can limit its use in load-bearing applications.

In general, synthetic polymers offer several advantages in tissue engineering, such as controllable degradation rates and mechanical properties, as well as the ability to incorporate bioactive molecules. However, synthetic polymers may also exhibit some limitations, such as potential cytotoxicity and difficulty in achieving precise control over their properties. Synthetic polymers have been widely used in various tissue engineering applications, including bone, cartilage, and skin regeneration, and drug delivery [35–37].

➤ **Inorganic materials:**

Inorganic materials include hydroxyapatite and ceramics, and are often used to mimic the mineralized ECM of bone and tooth tissues. They can provide a scaffold for cell attachment and mineral deposition, and can be tailored to match the specific properties of different tissues. For example, hydroxyapatite is a mineral component of bone and can be used to create scaffolds for bone regeneration, while ceramics can be used to create implants for dental or orthopedic applications.

Inorganic materials such as hydroxyapatite (HA) and ceramics have also been investigated for their potential use in tissue engineering. HA is a naturally occurring mineral that is the main component of bone and teeth. HA has excellent biocompatibility and bioactivity and can promote cell attachment and proliferation. HA can be synthesized and processed into various forms, including powders, coatings, and scaffolds, making it a versatile material for bone tissue engineering. However, HA may have limited mechanical strength, and its biodegradation rate may not match the rate of new bone formation.

Ceramics are another type of inorganic material that have been studied for tissue engineering applications. Ceramics are biocompatible and have excellent mechanical properties, making them a suitable material for load-bearing applications. Ceramic scaffolds have been used for bone tissue engineering due to their ability to promote new bone formation. However, ceramics may have limited biological activity and can be difficult to process into complex shapes. In general, inorganic materials offer advantages such as excellent biocompatibility, bioactivity, and mechanical properties. However, inorganic materials may also have limitations, such as limited degradation rates and difficulties in processing into complex

shapes. Inorganic materials have been investigated for various tissue engineering applications, including bone, dental, and cartilage regeneration [38–41].

Table.1 Advanced Biomimetic materials with its application

Composition	Materials	Applications
Natural polymers	Collagen, fibrin, chitosan, hyaluronic acid, alginate	Skin, bone, cartilage, blood vessels, nerve regeneration
Synthetic polymers	Polyethylene glycol (PEG), polylactic acid (PLA)	Drug delivery, bone regeneration, cartilage tissue engineering
Inorganic	Hydroxyapatite, ceramics	Bone regeneration, dental implants, drug delivery, wound healing
Hybrid	Composite of natural and synthetic polymers	Cartilage, bone, tendon, ligament, and cardiovascular tissues

Advanced techniques for biomimetic materials

Advanced techniques are being developed to improve the properties and functionality of biomimetic materials for tissue engineering applications. Some of these techniques include: 3D printing has revolutionized tissue engineering by allowing the creation of complex structures with precise control over scaffold geometry and pore size. 3D printing techniques can be used to fabricate scaffolds from a variety of biomimetic materials, including natural and synthetic polymers, as well as inorganic materials. The ability to print biomimetic materials in complex shapes and geometries enables the creation of tissue-engineered constructs that more closely mimic the native tissue structure.

Surface modification techniques are used to enhance the biological activity of biomimetic materials by modifying their surface properties. For example, surface modification with biomolecules such as growth factors or extracellular matrix proteins can improve cell adhesion, proliferation, and differentiation. Surface modification can also be used to create bioactive coatings on the surface of implants, promoting faster and more efficient tissue regeneration. Co-culture systems involve the simultaneous culture of multiple cell types within a biomimetic scaffold. Co-culture systems allow for the creation of complex tissue-engineered constructs that more closely resemble the native tissue microenvironment. Co-culture systems can also facilitate cell-cell interactions and the formation of tissue-specific extracellular matrix. Decellularization involves the removal of cells from native tissue while preserving the extracellular matrix structure. Decellularized tissues can be used as biomimetic scaffolds for tissue engineering applications. Decellularization techniques allow for the creation of scaffolds that retain the native tissue structure and extracellular matrix, providing an ideal microenvironment for cell attachment, proliferation, and differentiation.

These advanced techniques are being used to create biomimetic materials with improved properties and functionality for tissue engineering applications. As these techniques continue to evolve, the field of tissue engineering is expected to advance further, bringing us closer to the goal of creating functional tissue replacements for a range of tissue types.

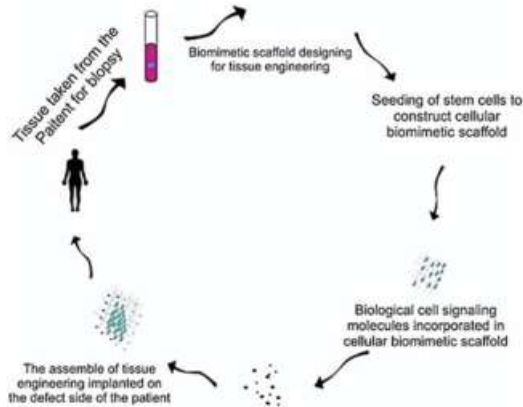


Fig.3 Techniques used in biomimetic materials [42]

Challenges and future directions

Designing biomimetic materials that can integrate with host tissue and mimic the complex extracellular matrix (ECM) is a major challenge in tissue engineering. There are several key challenges that must be overcome to create biomimetic materials that can function effectively in regenerative medicine applications. One of the primary challenges is immunogenicity, as biomimetic materials can trigger an immune response in the host, leading to inflammation and rejection of the scaffold. To overcome this challenge, researchers must select materials with low immunogenicity or modify the surface of the scaffold to reduce immune recognition. Another critical challenge is ensuring that the scaffold provides sufficient mechanical support for newly formed tissue. The mechanical properties of the scaffold are crucial for tissue engineering applications. Biomimetic materials should be designed to mimic the mechanical properties of the native tissue as closely as possible. Additionally, controlling the rate of scaffold degradation is important to match the rate of new tissue formation. If the scaffold degrades too quickly, it can lead to a loss of mechanical support and collapse of the newly formed tissue. If the scaffold degrades too slowly, it can impede new tissue growth.

Biomimetic materials should also mimic the biological activity of the native tissue, promoting cell adhesion, proliferation, and differentiation. Additionally, the scaffold should be able to support the formation of new blood vessels to ensure adequate oxygen and nutrient supply to the newly formed tissue. The complexity of the ECM presents another challenge, as the ECM is a complex structure with a variety of components, including different types of proteins, glycosaminoglycans, and growth factors. Designing biomimetic materials that can mimic the complex ECM is a significant challenge.

Finally, there is a significant challenge in translating biomimetic materials from the laboratory to the clinic. The safety and efficacy of the scaffold must be demonstrated in preclinical studies before it can be tested in humans. This requires a multidisciplinary approach that incorporates material science, biology, and engineering.

One approach to tissue engineering involves seeding the scaffold with stem cells to promote tissue regeneration. Gene editing technologies, such as CRISPR-Cas9, can be used to modify the genetic code of stem cells, allowing them to differentiate into specific cell types. This can be particularly useful for designing biomimetic materials that mimic complex tissues, such as cartilage or the liver. Combining stem cells and gene editing technologies with biomimetic materials can also be used to develop personalized medicine approaches. By taking patient-specific stem cells and modifying them using gene editing technologies, researchers can create customized biomimetic materials that are tailored to the patient's unique genetic profile. However, there are also significant challenges associated with the use of stem cells and gene editing technologies in tissue engineering. One challenge is ensuring the safety of the approach, particularly in the case of gene editing technologies, which can have off-target effects. Another challenge is scaling up the production of stem cells and biomimetic materials to a clinically relevant scale.

This would require the development of complex scaffolds that can support the formation of multiple types of cells, as well as the development of new techniques for controlling the differentiation of stem cells. Another direction for future research is the use of biomimetic materials for organ transplantation. Biomimetic materials could be used to create scaffolds that support the growth of functional organs, which could then be transplanted into patients in need. This approach could help to address the shortage of donor organs and reduce the risk of rejection. Nanotechnology also holds significant promise for the development of biomimetic materials. By engineering materials at the nanoscale, researchers can create materials with unique mechanical, chemical, and biological properties that could be used for tissue engineering applications. For example, nanoscale materials could be used to promote the formation of new blood vessels or to deliver therapeutic molecules directly to cells. The use of artificial intelligence (AI) and machine learning could significantly advance the development of biomimetic materials. By using AI algorithms to analyze large datasets, researchers could identify new materials and scaffold designs that are optimized for tissue engineering applications. Additionally, machine learning could be used to optimize the differentiation of stem cells and to predict the mechanical properties of biomimetic materials.

Conclusion

Through mimicking the extracellular matrix (ECM) of the host tissue, biomimetic materials can support cell adhesion, proliferation, and differentiation, facilitating tissue regeneration. Natural polymers, synthetic polymers, and inorganic

materials are the three main classes of biomimetic materials, each with their own advantages and disadvantages. Additionally, advanced techniques such as 3D printing and nanotechnology have shown promise in creating biomimetic materials with complex structures and properties. By combining biomimetic materials with stem cells and gene editing technologies, it may be possible to create materials that can integrate better with the host tissue and mimic the complex ECM. The future prospects for biomimetic materials in regenerative medicine are extremely promising, with the development of materials that can mimic the structure and function of multiple tissues, use of biomimetic materials for organ transplantation, and the use of AI and machine learning to optimize the properties of biomimetic materials. As such, biomimetic materials have the potential to transform the way we approach the treatment of diseases and injuries, and continued research and development in this area will be critical for unlocking their full potential.

References

- [1] Nosrat A, Kolahdouzan A, Hosseini F, et al. Histologic outcomes of uninfected human immature teeth treated with regenerative endodontics: 2 case reports. *J Endod.* 2015;41:1725–1729.
- [2] Yue L, Jayapal M, Cheng X, et al. Highly dispersed ultra-small nano Sn-SnSb nanoparticles anchored on N-doped graphene sheets as high performance anode for sodium ion batteries. *Appl Surf Sci.* 2020;512:145686.
- [3] Samyal R, Bagha AK, Bedi R, et al. Predicting the effect of fiber orientations and boundary conditions on the optimal placement of PZT sensor on the composite structures. *Mater Res Express.* 2021;8.
- [4] Ong TK, Lim GS, Singh M, et al. Quantitative Assessment of Root Development after Regenerative Endodontic Therapy: A Systematic Review and Meta-Analysis. *J Endod.* 2020;46:1856-1866.e2.
- [5] Bezgin T, Yilmaz AD, Celik BN, et al. Efficacy of Platelet-rich Plasma as a Scaffold in Regenerative Endodontic Treatment. *J Endod.* 2015;41:36–44.
- [6] Baino F. Bioactive glasses – When glass science and technology meet regenerative medicine. *Ceram Int.* 2018;44:14953–14966.
- [7] Demirel A, Bezgin T, Sari Ş. Effects of Root Maturation and Thickness Variation in Coronal Mineral Trioxide Aggregate Plugs Under Traumatic Load on Stress Distribution in Regenerative Endodontic Procedures: A 3-dimensional Finite Element Analysis Study. *J Endod.* 2021;47:492-499.e4.
- [8] Chrepa V, Joon R, Austah O, et al. Clinical Outcomes of Immature Teeth Treated with Regenerative Endodontic Procedures—A San Antonio Study. *J Endod.* 2020;46:1074–1084.
- [9] Gupta TK, Budarapu PR, Chappidi SR, et al. Advances in Carbon Based Nanomaterials for Bio-Medical Applications. *Curr Med Chem [Internet].* 2019 [cited 2023 Apr 23];26:6851–6877. Available from: <https://pubmed.ncbi.nlm.nih.gov/30474523/>.
- [10] Singh, B., Saxena, K. K., & Roy, T. (2023). Opportunities and challenges in machining of aluminium metal matrix composites using electrical discharge machining. *Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering*, 09544089231213861.
- [11] Rodrigues MT, Carvalho PP, Gomes ME, et al. Biomaterials in Preclinical Approaches for Engineering Skeletal Tissues. *Transl Regen Med.* 2015;127–139.
- [12] Saxena KK, Awasthi A. *Novel Additive Manufacturing Processes and Techniques in Industry 4.0.* 2020.
- [13] Yadav S, Yamasani P, Kumar S. Experimental studies on a micro power generator using thermo-electric modules mounted on a micro-combustor. *Energy Convers Manag.* 2015;99:1–7.
- [14] Jaffery HA, Sabri MFM, Said SM, et al. Electrochemical corrosion behavior of Sn-0.7Cu solder alloy with the addition of bismuth and iron. *J Alloys Compd.* 2019;810:151925.
- [15] Awasthi A, Saxena KK, Dwivedi RK. An investigation on classification and characterization of bio materials and additive manufacturing techniques for bioimplants. *Mater Today Proc.* 2021;44:2061–2068.
- [16] Chandrappa V, Basavapoornima C, Kesavulu CR, et al. Spectral studies of Dy³⁺:zincphosphate glasses for white light source emission applications: A comparative study. *J Non Cryst Solids [Internet].* 2022 [cited 2023 Apr 23];583:121466. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0022309322000758>.

- [17] Yadav P, Beniwal G, Saxena KK. A review on pore and porosity in tissue engineering. *Mater Today Proc.* 2021;44:2623–2628.
- [18] Dhawan A, Gupta N, Goyal R, et al. Evaluation of mechanical properties of concrete manufactured with fly ash, bagasse ash and banana fibre. *Mater Today Proc.* 2021;44:17–22.
- [19] Chen Q, Thouas GA. Metallic implant biomaterials. *Mater. Sci. Eng. R Reports.* 2015.
- [20] Reith G, Schmitz-Greven V, Hensel KO, et al. Metal implant removal: benefits and drawbacks - a patient survey. *BMC Surg.* 2015;15.
- [21] Chatzistavrou X, Esteve D, Hatzistavrou E, et al. Sol-gel based fabrication of novel glass-ceramics and composites for dental applications. *Mater Sci Eng C.* 2010;30:730–739.
- [22] Marew T, Birhanu G. Three dimensional printed nanostructure biomaterials for bone tissue engineering. *Regen Ther.* 2021;18:102–111.
- [23] Kumar PSS, Allamraju KV. A Review Of Natural Fiber Composites [Jute, Sisal, Kenaf]. *Mater Today Proc.* 2019;18:2556–2562.
- [24] Prasanthi, P., Sumanth, C. M., Madhav, V. V., Singh, B., Saxena, K. K., Kumar, C. L., ... & Abdullaev, S. S. (2023). Modelling and mechanical properties evaluation for lap joint of natural composites using finite element method. *International Journal on Interactive Design and Manufacturing (IJIDeM)*, 1-12.;
- [25] Atchudan R, Jebakumar Immanuel Edison TN, Shanmugam M, et al. Sustainable synthesis of carbon quantum dots from banana peel waste using hydrothermal process for in vivo bioimaging. *Phys E Low-dimensional Syst Nanostructures.* 2021;126:114417.
- [26] Murphy S V, Atala A. 3D bioprinting of tissues and organs. *Nat Biotechnol [Internet].* 2014 [cited 2021 Aug 4];32:773–785. Available from: <http://www.ncbi.nlm.nih.gov/pubmed/25093879>.
- [27] Kodli BK, Karre R, Saxena KK, et al. Flow behaviour of TiHy 600 alloy under hot deformation using gleeble 3800. *Adv Mater Process Technol.* 2017;
- [28] Jujjavarapu, S., Kota, S., Kotkunde, N. R., Krishna Jasti, N. V., & Saxena, K. K. (2023). Life cycle assessment study on glove box assembly of Indian passenger vehicles. *Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering*, 09544089231215200.
- [29] Chang RYK, Okamoto Y, Morales S, et al. Hydrogel formulations containing non-ionic polymers for topical delivery of bacteriophages. *Int J Pharm.* 2021;605.
- [30] Kolesky DB, Truby RL, Gladman AS, et al. 3D bioprinting of vascularized, heterogeneous cell-laden tissue constructs. *Adv Mater [Internet].* 2014 [cited 2021 Aug 4];26:3124–3130. Available from: <http://www.ncbi.nlm.nih.gov/pubmed/24550124>.
- [31] Kalpana G, Kumar P V., Aljawarneh S, et al. Shifted Adaption Homomorphism Encryption for Mobile and Cloud Learning. *Comput Electr Eng.* 2018;65:178–195.
- [32] Arun, V., Singh, A. K., Shukla, N. K., & Tripathi, D. K. (2016). Design and performance analysis of SOA–MZI based reversible toffoli and irreversible AND logic gates in a single photonic circuit. *Optical and quantum electronics*, 48, 1-15.
- [33] Awasthi, A., Gupta, A., Saxena, K. K., Dwivedi, R. K., Kundalkar, D., Abdul-Zahra, D. S., ... & Saggi, H. S. (2022). Design and analysis of equal-channel angular pressing of Al6061: a comparative study. *Advances in Materials and Processing Technologies*, 1-10.
- [34] Poul Raj IL, Valanarasu S, Hariprasad K, et al. Enhancement of optoelectronic parameters of Nd-doped ZnO nanowires for photodetector applications. *Opt Mater (Amst).* 2020;109:110396.
- [35] Kokubo T, Takadama H. How useful is SBF in predicting in vivo bone bioactivity? *Biomaterials.* 2006;27:2907–2915.
- [36] Kontonasaki E, Sivropoulou A, Papadopoulou L, et al. Attachment and proliferation of human periodontal ligament fibroblasts on bioactive glass modified ceramics. *J Oral Rehabil.* 2007;34:57–67.

- [37] Niinomi M, Hattori T, Morikawa K, et al. Development of low rigidity β -type titanium alloy for biomedical applications. *Mater Trans.* 2002;
- [38] Sultan M. Hydroxyapatite/polyurethane composites as promising biomaterials. 2018;
- [39] Kishore V, Bullock W, Sun X, et al. Tenogenic differentiation of human MSCs induced by the topography of electrochemically aligned collagen threads. *Biomaterials.* 2012;33:2137–2144.
- [40] Ratner BD, Hoffman AS, Schoen FJ, et al. *Biomaterials science: an introduction to materials in medicine.* Chem. Eng. 2004.
- [41] Akter F, Ibanez J, Kotter M. *Neural Tissue Engineering. Tissue Eng Made Easy.* 2016;29–42.
- [42] Pei D, Wang M, Li W, et al. Remodeling of aligned fibrous extracellular matrix by encapsulated cells under mechanical stretching. *Acta Biomater.* 2020;112:202–212.